


PROPOSED WELLBORE SCHEMATIC - SIDETRACK

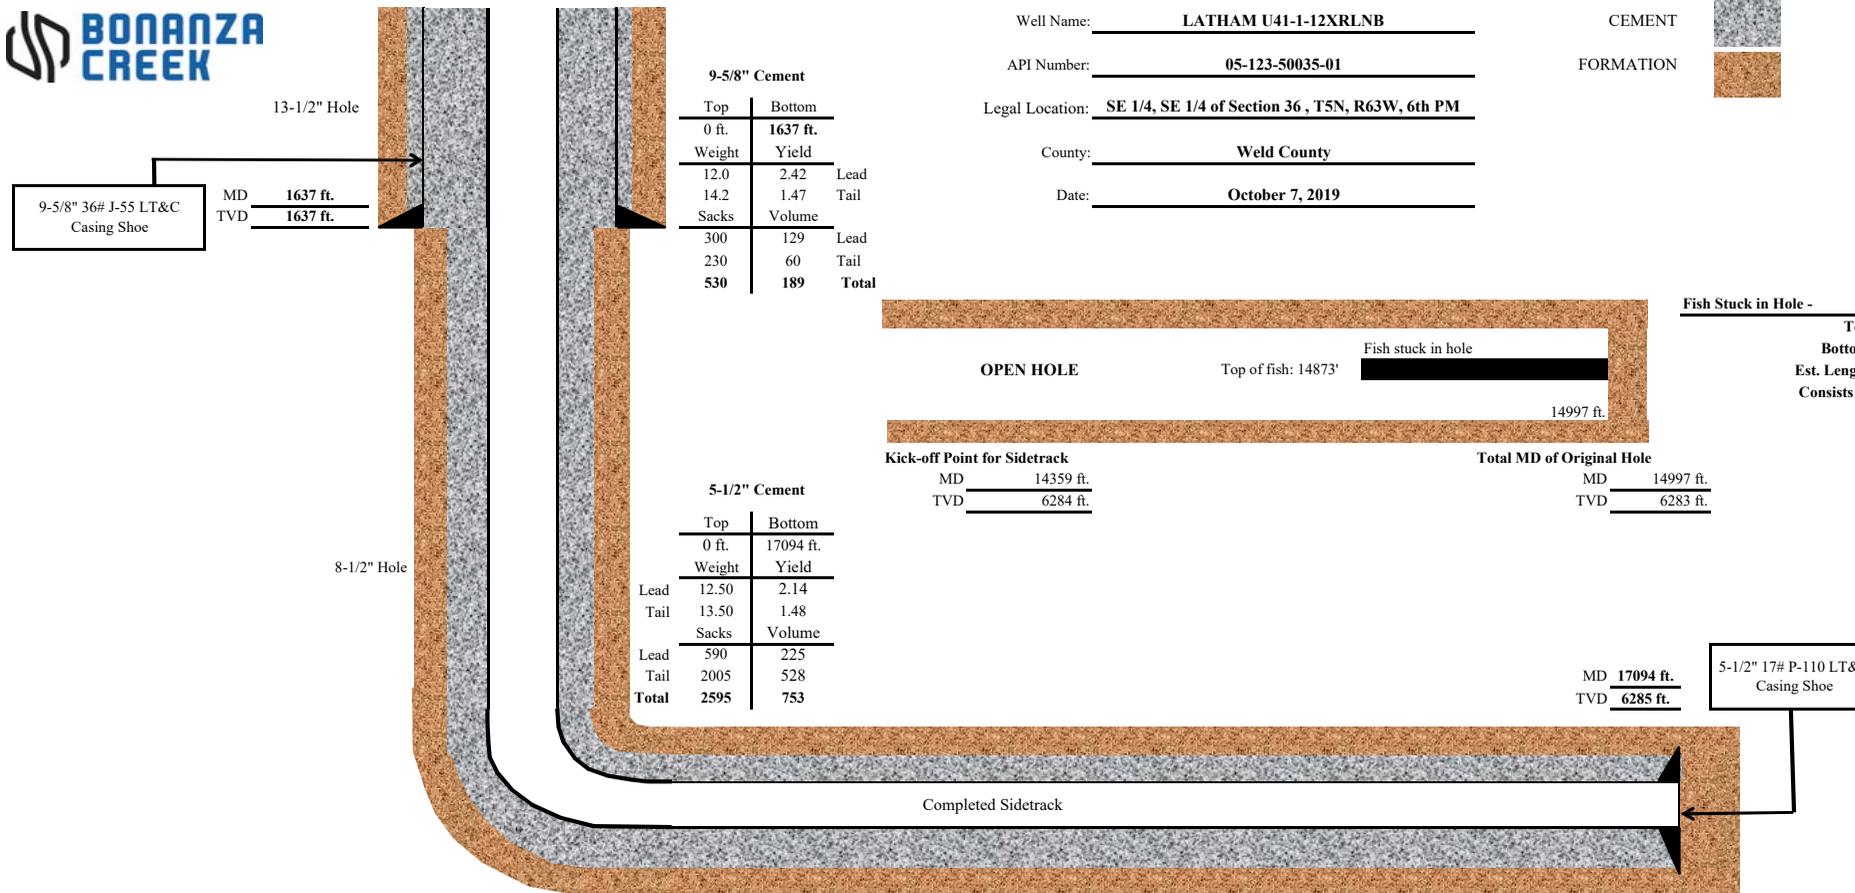

9-5/8" 36# 1-55 LT&C Casing Shoe

MD 1637 ft.
TVD 1637 ft.

13-1/2" Hole

8-1/2" Hole

9-5/8" Cement

Top	Bottom	
0 ft.	1637 ft.	
Weight	Yield	
12.0	2.42	Lead
14.2	1.47	Tail
Sacks	Volume	
300	129	Lead
230	60	Tail
530	189	Total

5-1/2" Cement

Top	Bottom	
0 ft.	17094 ft.	
Weight	Yield	
Lead 12.50	2.14	
Tail 13.50	1.48	
Sacks	Volume	
Lead 590	225	
Tail 2005	528	
Total 2595	753	

Well Name: LATHAM U41-1-12XRLNB
 API Number: 05-123-50035-01
 Legal Location: SE 1/4, SE 1/4 of Section 36 , T5N, R63W, 6th PM
 County: Weld County
 Date: October 7, 2019

CEMENT
 FORMATION



Fish Stuck in Hole -

Top: 14873 ft.
Bottom: 14997 ft.
Est. Length: 124 ft.
Consists of: Bit box from RSS tool, drill bit

Kick-off Point for Sidetrack

MD 14359 ft.
 TVD 6284 ft.

Total MD of Original Hole

MD 14997 ft.
 TVD 6283 ft.

MD 17094 ft.
 TVD 6285 ft.

5-1/2" 17# P-110 LT&C Casing Shoe

Completed Sidetrack