

Azimuths to True North
Magnetic North: 9.42°



Magnetic Field
Strength: 51454.4nT
Dip Angle: 65.77°
Date: 1/13/2020
Model: HDGM_FILE

Well Details: GM 442-19

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.00	0.00	1622110.5000	2255402.1000	39.5117750	-108.1395052	GM 442-19

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
GM 442-19 KMV GAS	4882.00	-1052.98	-1464.23	1621100.5000	2253907.9000	39.5088840	-108.1446948	Circle (Radius: 50.00)
GM 442-19 PBHL	6947.00	-1052.98	-1464.23	1621100.5000	2253907.9000	39.5088840	-108.1446948	Point

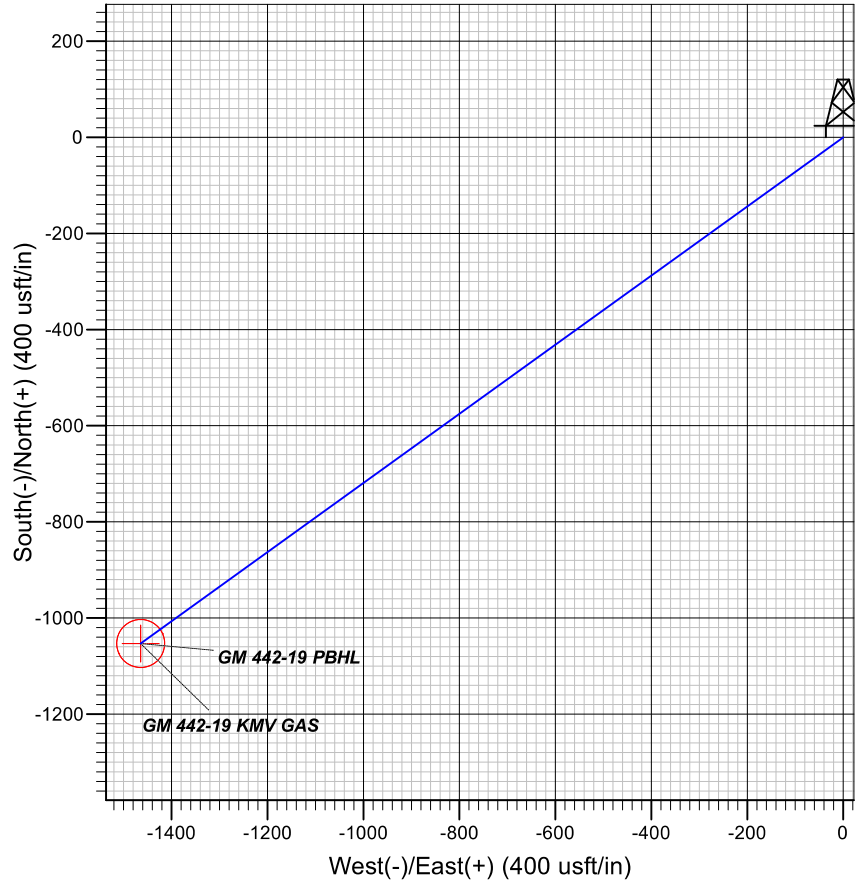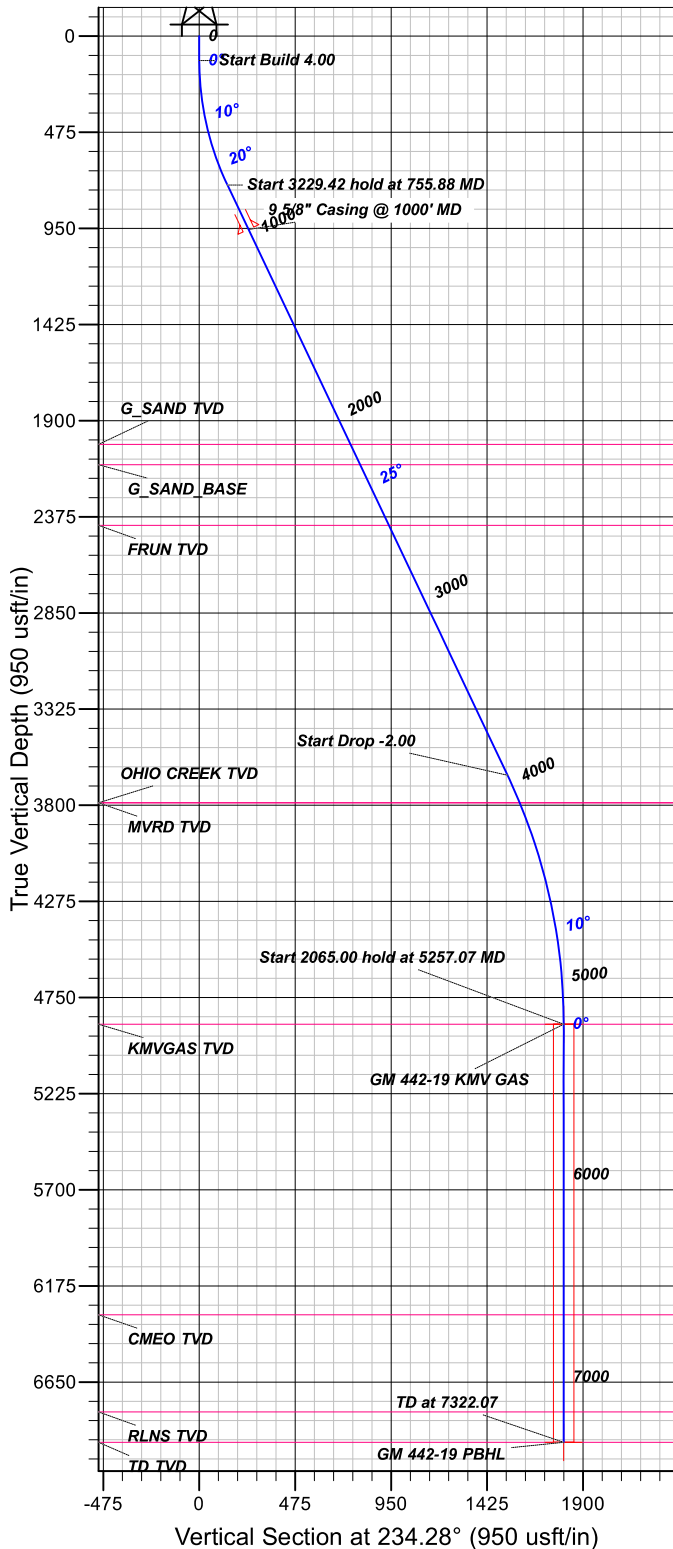

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
2017.00	2175.26	G_SAND TVD
2117.00	2285.99	G_SAND BASE
2417.00	2618.19	FRUN TVD
3787.00	4133.48	MVRD TVD
3787.00	4133.48	OHIO CREEK TVD
4882.00	5257.07	KMGAS TVD
6317.00	6692.07	CMEO TVD
6797.00	7172.07	RLNS TVD
6947.00	7322.07	TD TVD

PROJECT DETAILS: Garfield County, CO NAD83

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: Colorado Central Zone
System Datum: Mean Sea Level

CASING DETAILS

TVD	MD	Name	Size
955.66	1000.00	9 5/8" Casing @ 1000' MD	9.62

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSEct
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120.00	0.00	0.00	120.00	0.00	0.00	0.00	0.00	0.00
755.88	25.44	234.28	735.20	-81.06	-112.72	4.00	234.28	138.84
3985.30	25.44	234.28	3651.60	-890.86	-1238.79	0.00	0.00	1525.85
5257.07	0.00	0.00	4882.00	-1052.98	-1464.23	2.00	180.00	1803.53
7322.07	0.00	0.00	6947.00	-1052.98	-1464.23	0.00	0.00	1803.53

TEP Rocky Mountain LLC

Garfield County, CO NAD83

GM 12-20 Pad

GM 442-19 - Slot GM 442-19

OH

Plan: Plan 2 13Jan2020 sbsdi

Standard Planning Report

13 January, 2020



Scientific Drilling, Intl

Planning Report

Database:	Grand Junction	Local Co-ordinate Reference:	Well GM 442-19 - Slot GM 442-19
Company:	TEP Rocky Mountain LLC	TVD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Project:	Garfield County, CO NAD83	MD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Site:	GM 12-20 Pad	North Reference:	True
Well:	GM 442-19	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 13Jan2020 sbsdi		

Project	Garfield County, CO NAD83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		

Site	GM 12-20 Pad, Site Center : GM 31-19		
Site Position:		Northing:	1,622,131.3600 usft
From:	Map	Easting:	2,255,369.4200 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13.20 in
		Latitude:	39.5118297
		Longitude:	-108.1396232
		Grid Convergence:	-1.66 °

Well	GM 442-19 - Slot GM 442-19					
Well Position	+N/-S	-19.90 usft	Northing:	1,622,110.5000 usft	Latitude:	39.5117750
	+E/-W	33.27 usft	Easting:	2,255,402.1000 usft	Longitude:	-108.1395053
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	5,752.10 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM_FILE	1/13/2020	9.42	65.77	51,454.40000000

Design	Plan 2 13Jan2020 sbsdi				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.00	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	234.28	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120.00	0.00	0.00	120.00	0.00	0.00	0.00	0.00	0.00	0.00	
755.88	25.44	234.28	735.20	-81.06	-112.72	4.00	4.00	0.00	234.28	
3,985.30	25.44	234.28	3,651.60	-890.86	-1,238.79	0.00	0.00	0.00	0.00	
5,257.07	0.00	0.00	4,882.00	-1,052.98	-1,464.23	2.00	-2.00	0.00	180.00	GM 442-19 KMV GAS
7,322.07	0.00	0.00	6,947.00	-1,052.98	-1,464.23	0.00	0.00	0.00	0.00	GM 442-19 PBHL

Scientific Drilling, Intl

Planning Report

Database:	Grand Junction	Local Co-ordinate Reference:	Well GM 442-19 - Slot GM 442-19
Company:	TEP Rocky Mountain LLC	TVD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Project:	Garfield County, CO NAD83	MD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Site:	GM 12-20 Pad	North Reference:	True
Well:	GM 442-19	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 13Jan2020 sbsdi		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
120.00	0.00	0.00	120.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 4.00									
200.00	3.20	234.28	199.96	-1.30	-1.81	2.23	4.00	4.00	0.00
300.00	7.20	234.28	299.53	-6.59	-9.17	11.29	4.00	4.00	0.00
400.00	11.20	234.28	398.22	-15.93	-22.15	27.28	4.00	4.00	0.00
500.00	15.20	234.28	495.56	-29.26	-40.68	50.11	4.00	4.00	0.00
600.00	19.20	234.28	591.07	-46.52	-64.69	79.67	4.00	4.00	0.00
700.00	23.20	234.28	684.28	-67.63	-94.04	115.83	4.00	4.00	0.00
755.88	25.44	234.28	735.20	-81.06	-112.72	138.84	4.00	4.00	0.00
Start 3229.42 hold at 755.88 MD									
800.00	25.44	234.28	775.04	-92.12	-128.10	157.79	0.00	0.00	0.00
900.00	25.44	234.28	865.35	-117.20	-162.97	200.74	0.00	0.00	0.00
1,000.00	25.44	234.28	955.66	-142.28	-197.84	243.69	0.00	0.00	0.00
9 5/8" Casing @ 1000' MD									
1,100.00	25.44	234.28	1,045.96	-167.35	-232.71	286.64	0.00	0.00	0.00
1,200.00	25.44	234.28	1,136.27	-192.43	-267.58	329.58	0.00	0.00	0.00
1,300.00	25.44	234.28	1,226.58	-217.50	-302.45	372.53	0.00	0.00	0.00
1,400.00	25.44	234.28	1,316.88	-242.58	-337.32	415.48	0.00	0.00	0.00
1,500.00	25.44	234.28	1,407.19	-267.65	-372.19	458.43	0.00	0.00	0.00
1,600.00	25.44	234.28	1,497.50	-292.73	-407.05	501.38	0.00	0.00	0.00
1,700.00	25.44	234.28	1,587.80	-317.80	-441.92	544.33	0.00	0.00	0.00
1,800.00	25.44	234.28	1,678.11	-342.88	-476.79	587.28	0.00	0.00	0.00
1,900.00	25.44	234.28	1,768.42	-367.95	-511.66	630.23	0.00	0.00	0.00
2,000.00	25.44	234.28	1,858.72	-393.03	-546.53	673.18	0.00	0.00	0.00
2,100.00	25.44	234.28	1,949.03	-418.11	-581.40	716.13	0.00	0.00	0.00
2,175.26	25.44	234.28	2,017.00	-436.98	-607.64	748.45	0.00	0.00	0.00
G_SAND TVD									
2,200.00	25.44	234.28	2,039.34	-443.18	-616.27	759.08	0.00	0.00	0.00
2,300.00	25.44	234.28	2,129.64	-468.26	-651.14	802.03	0.00	0.00	0.00
2,400.00	25.44	234.28	2,219.95	-493.33	-686.01	844.97	0.00	0.00	0.00
2,500.00	25.44	234.28	2,310.26	-518.41	-720.88	887.92	0.00	0.00	0.00
2,599.99	25.44	234.28	2,400.57	-543.48	-755.74	930.87	0.00	0.00	0.00
2,618.19	25.44	234.28	2,417.00	-548.05	-762.09	938.69	0.00	0.00	0.00
FRUN TVD									
2,699.99	25.44	234.28	2,490.87	-568.56	-790.61	973.82	0.00	0.00	0.00
2,799.99	25.44	234.28	2,581.18	-593.63	-825.48	1,016.77	0.00	0.00	0.00
2,899.99	25.44	234.28	2,671.49	-618.71	-860.35	1,059.72	0.00	0.00	0.00
2,999.99	25.44	234.28	2,761.79	-643.79	-895.22	1,102.67	0.00	0.00	0.00
3,099.99	25.44	234.28	2,852.10	-668.86	-930.09	1,145.62	0.00	0.00	0.00
3,199.99	25.44	234.28	2,942.41	-693.94	-964.96	1,188.57	0.00	0.00	0.00
3,299.99	25.44	234.28	3,032.71	-719.01	-999.83	1,231.52	0.00	0.00	0.00
3,399.99	25.44	234.28	3,123.02	-744.09	-1,034.70	1,274.47	0.00	0.00	0.00
3,499.99	25.44	234.28	3,213.33	-769.16	-1,069.56	1,317.41	0.00	0.00	0.00
3,599.99	25.44	234.28	3,303.63	-794.24	-1,104.43	1,360.36	0.00	0.00	0.00
3,699.99	25.44	234.28	3,393.94	-819.31	-1,139.30	1,403.31	0.00	0.00	0.00
3,799.99	25.44	234.28	3,484.25	-844.39	-1,174.17	1,446.26	0.00	0.00	0.00
3,899.99	25.44	234.28	3,574.55	-869.47	-1,209.04	1,489.21	0.00	0.00	0.00
3,985.30	25.44	234.28	3,651.60	-890.86	-1,238.79	1,525.85	0.00	0.00	0.00
Start Drop -2.00									

Scientific Drilling, Intl

Planning Report

Database:	Grand Junction	Local Co-ordinate Reference:	Well GM 442-19 - Slot GM 442-19
Company:	TEP Rocky Mountain LLC	TVD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Project:	Garfield County, CO NAD83	MD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Site:	GM 12-20 Pad	North Reference:	True
Well:	GM 442-19	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 13Jan2020 sbsdi		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,999.99	25.14	234.28	3,664.88	-894.52	-1,243.88	1,532.13	2.00	-2.00	0.00
4,099.99	23.14	234.28	3,756.13	-918.40	-1,277.08	1,573.02	2.00	-2.00	0.00
4,133.48	22.47	234.28	3,787.00	-925.98	-1,287.62	1,586.01	2.00	-2.00	0.00
OHIO CREEK TVD - MVRD TVD									
4,199.99	21.14	234.28	3,848.75	-940.40	-1,307.68	1,610.71	2.00	-2.00	0.00
4,299.99	19.14	234.28	3,942.63	-960.51	-1,335.64	1,645.14	2.00	-2.00	0.00
4,399.99	17.14	234.28	4,037.65	-978.68	-1,360.91	1,676.28	2.00	-2.00	0.00
4,499.99	15.14	234.28	4,133.70	-994.91	-1,383.48	1,704.08	2.00	-2.00	0.00
4,599.99	13.14	234.28	4,230.67	-1,009.18	-1,403.32	1,728.51	2.00	-2.00	0.00
4,699.99	11.14	234.28	4,328.43	-1,021.46	-1,420.39	1,749.54	2.00	-2.00	0.00
4,799.99	9.14	234.28	4,426.86	-1,031.74	-1,434.69	1,767.15	2.00	-2.00	0.00
4,899.99	7.14	234.28	4,525.84	-1,040.01	-1,446.18	1,781.31	2.00	-2.00	0.00
4,999.99	5.14	234.28	4,625.27	-1,046.25	-1,454.87	1,792.01	2.00	-2.00	0.00
5,099.99	3.14	234.28	4,725.00	-1,050.47	-1,460.73	1,799.23	2.00	-2.00	0.00
5,199.99	1.14	234.28	4,824.92	-1,052.65	-1,463.77	1,802.97	2.00	-2.00	0.00
5,257.07	0.00	0.00	4,882.00	-1,052.98	-1,464.23	1,803.53	2.00	-2.00	220.26
Start 2065.00 hold at 5257.07 MD - KMGAS TVD									
5,299.99	0.00	0.00	4,924.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,399.99	0.00	0.00	5,024.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,499.99	0.00	0.00	5,124.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,599.99	0.00	0.00	5,224.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,699.99	0.00	0.00	5,324.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,799.99	0.00	0.00	5,424.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,899.99	0.00	0.00	5,524.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
5,999.99	0.00	0.00	5,624.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,099.99	0.00	0.00	5,724.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,199.99	0.00	0.00	5,824.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,299.99	0.00	0.00	5,924.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,399.99	0.00	0.00	6,024.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,499.99	0.00	0.00	6,124.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,599.99	0.00	0.00	6,224.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,692.07	0.00	0.00	6,317.00	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
CMEO TVD									
6,699.99	0.00	0.00	6,324.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,799.99	0.00	0.00	6,424.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,899.99	0.00	0.00	6,524.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
6,999.99	0.00	0.00	6,624.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
7,099.99	0.00	0.00	6,724.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
7,172.07	0.00	0.00	6,797.00	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
RLNS TVD									
7,199.99	0.00	0.00	6,824.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
7,299.99	0.00	0.00	6,924.92	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
7,322.07	0.00	0.00	6,947.00	-1,052.98	-1,464.23	1,803.53	0.00	0.00	0.00
TD at 7322.07 - TD TVD									

Scientific Drilling, Intl

Planning Report

Database:	Grand Junction	Local Co-ordinate Reference:	Well GM 442-19 - Slot GM 442-19
Company:	TEP Rocky Mountain LLC	TVD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Project:	Garfield County, CO NAD83	MD Reference:	GL 5752.1' & KB 24' @ 5776.10usft (H&P 318)
Site:	GM 12-20 Pad	North Reference:	True
Well:	GM 442-19	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 13Jan2020 sbsdi		

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
GM 442-19 KMV GAS - plan hits target center - Circle (radius 50.00)	0.00	0.00	4,882.00	-1,052.98	-1,464.23	1,621,100.5000	2,253,907.9000	39.5088840	-108.1446948
GM 442-19 PBHL - plan hits target center - Point	0.00	0.00	6,947.00	-1,052.98	-1,464.23	1,621,100.5000	2,253,907.9000	39.5088840	-108.1446948

Casing Points				
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (in)	Hole Diameter (in)
1,000.00	955.66	9 5/8" Casing @ 1000' MD	9.62	13.50

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
2,175.26	2,017.00	G_SAND TVD		0.00	
2,618.19	2,417.00	FRUN TVD		0.00	
4,133.48	3,787.00	OHIO CREEK TVD		0.00	
4,133.48	3,787.00	MVRD TVD		0.00	
5,257.07	4,882.00	KMVGAS TVD		0.00	
6,692.07	6,317.00	CMEQ TVD		0.00	
7,172.07	6,797.00	RLNS TVD		0.00	
7,322.07	6,947.00	TD TVD		0.00	

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
120.00	120.00	0.00	0.00	Start Build 4.00
755.88	735.20	-81.06	-112.72	Start 3229.42 hold at 755.88 MD
3,985.30	3,651.60	-890.86	-1,238.79	Start Drop -2.00
5,257.07	4,882.00	-1,052.98	-1,464.23	Start 2065.00 hold at 5257.07 MD
7,322.07	6,947.00	-1,052.98	-1,464.23	TD at 7322.07