


KB: 14' GL: 7,193'

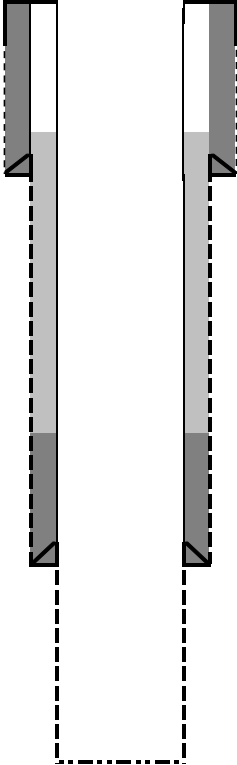

SURFACE CASING:

DEPTH: 265' SIZE: 10 3/4" WT: 32.75 lb/ft GRADE: J-55 BIT SIZE: 17 1/2"

CEMENT: 250 sks cement

INTERMEDIATE CASING:

DEPTH: \_\_\_\_\_ SIZE: \_\_\_\_\_ WT: \_\_\_\_\_ GRADE: \_\_\_\_\_ BIT SIZE: \_\_\_\_\_

CEMENT: \_\_\_\_\_

DV TOOL: \_\_\_\_\_

PRODUCTION CASING:

DEPTH: 4444' SIZE: 7" WT: 20.0 lb/ft GRADE: J-55 BIT SIZE: 8 1/2"

CEMENT: 100 sks cement

Open Hole: Open hole drilled to 4921'

TUBING: \_\_\_\_\_  
DEPTH: \_\_\_\_\_ SIZE: \_\_\_\_\_ WT: \_\_\_\_\_ GRADE: \_\_\_\_\_ Packer: \_\_\_\_\_

Pumping Unit \_\_\_\_\_

COMPLETION:									
STAGE	PERFS	Holes	FG (psi/ft)	Rate BPM	Fluid Used (gal)	40/70 White (lb)	20/40 White (lb)	20/40 CRC (lb)	Fluid Type
<a href="#">Open Hole</a>									
FRAC 1175 bbls oil	25,000# sand								

TD: 4,935' PBTD: 4,921'