

Well

Operator

Location

County

State

Field

Footages

FILE 6-0-17

EnCana Oil & Gas (USA) Inc.

NWNE Section 17-T2N-R68W

WELD

Colorado


Wattenberg

1065' FNL & 1714' FEL

Spud Date: 03-14-12

Log Tops

Sussex	4282'
Niobrara	7347'
Codell	7605'
J Sand	8028'

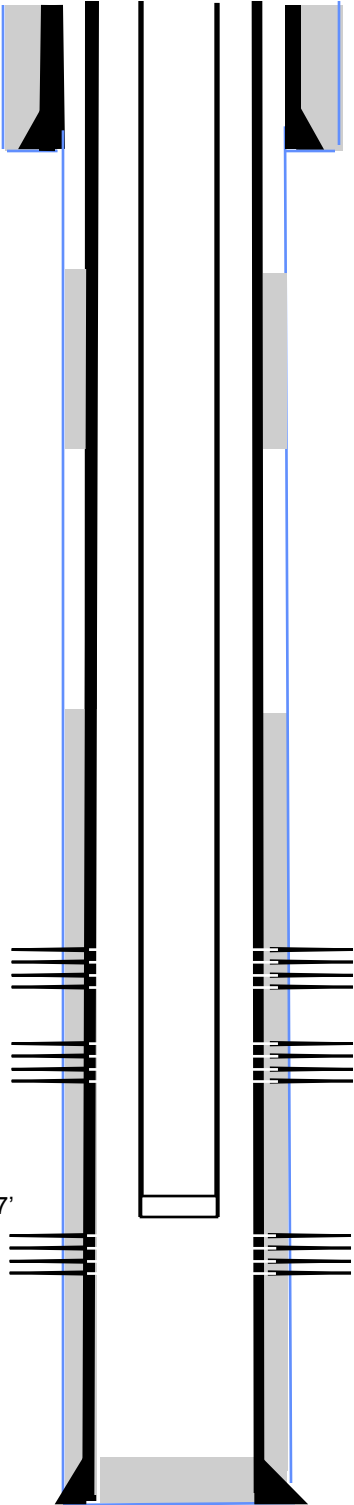

Surface Casing and Cement
8 5/8" , landed @ 1022',cemented with 395 sxs

Main Hole
7-7/8" to TD

Production Casing and Cement
4-1/2" , landed @ 8147',cemented with 650 sxs

CBP
Set @ 7190'. 10-10-12
Drilled out on 10-11-12

Perf'd the Niobrara 7414'-7426' @ 4 spf
Frac'd the Niobrara 7414'-7426', (48 holes), w/ 96,768 gals 18 # Vistar Hybrid cross linked gel containing 250,320 # 30/50 sand. 09-22-12

CFP
Set @ 7476' 09-21-12
Drilled out on 10-11-12

Perf'd the Codell from 7606'-7620' @ 3 spf
Frac'd the Codell 7606'-7620' (42 holes) w/ 89,208 gal 22# Vistar Hybrid cross linked gel containing 250,140 # 30/50 sand. 09-21-12

CFP
Set @ 7670'. 09-20-12
Drilled out on 10-11-12

Perf'd the J Sand from 8036'-8060', @ 2 spf
Frac'd the J-Sand 8036'-8060', (50 holes)w/ 62,160 gal 18 # Vistar Hybrid cross linked gel containing 250,240 # 20/40 Sand.09-20-12

Production Tubing
2-3/8" tubing, set @ 8011.97'

8165' — Driller's TD