

Well

Operator

Location

County

State

Field

Footages

FILE 32-17

EnCana Oil & Gas (USA) Inc.

NENW Section 17-T2N-R68W

WELD

Colorado


Wattenberg

1057' FNL & 1721' FEL

Spud Date: 03-21-12

Log Tops

Sussex	4215'
Niobrara	7292'
Codell	7560'
J Sand	7988'

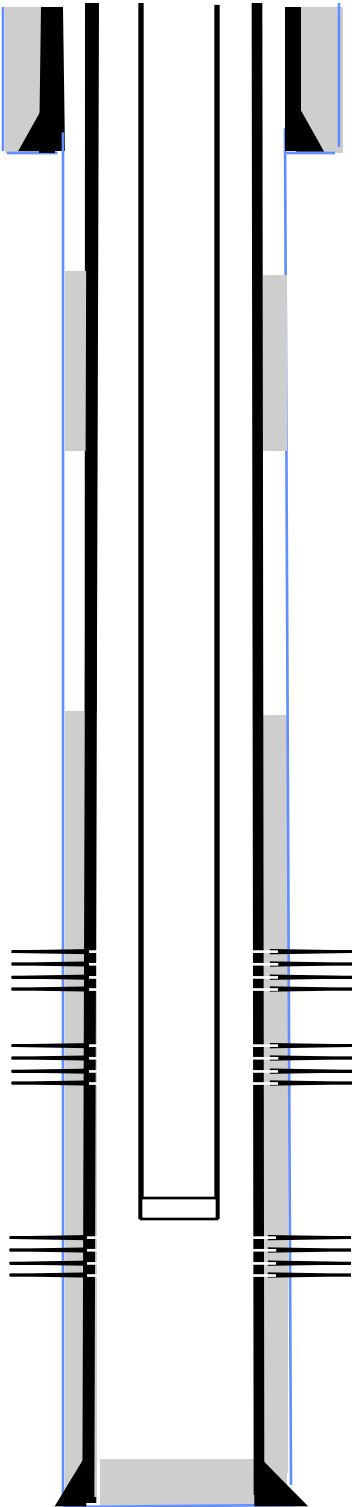

Surface Casing and Cement
8 5/8" , landed @ 1037',cemented with 400 sxs

Main Hole
7-7/8" to TD

Production Casing and Cement
4-1/2" , landed @ 8145',cemented with 200 sxs

CBP
Set @ 7250'. 10-08-12
Drilled out on 10-09-12

Perf'd the Niobrara 7357' – 7369' @ 4 spf
Frac'd the Niobrara 7357' - 7369' (48 holes) w/ 97,356 gals 18# Vistar Hybrid cross linked gel containing 250,660# 30/50 sand. 09-22-12

CFP
Set @ 7476' 09-21-12
Drilled out on 10-09-12

Perf'd the Codell from 7566' – 7580' @ 3 spf
Frac'd the Codell 7566' - 7580' (42 holes) w/88,746 gal 22# Vistar Hybrid cross linked gel containing 250,460# 30/50 sand. 09-21-12

CFP
Set @ 7628'. 09-20-12
Drilled out on 10-09-12

Perf'd the J Sand 8001' – 8025' @ 2 spf
Frac'd the J-Sand 8001' - 8025' (50 Holes) with 63,756 gal 18# Vistar Hybrid cross linked gel containing 250,240# 20/40 sand. 09-20-12

Production Tubing
2-3/8" tubing, set @ 7967'

8162' — Driller's TD