

Well

Operator

Location

County

State

Field

Footages

FILE 31-17

EnCana Oil & Gas (USA) Inc.

NWNE Section 17-T2N-R68W

WELD

Colorado


Wattenberg

1050' FNL & 1728' FEL

Spud Date: 04-02-12

Log Tops

Sussex	4136'
Niobrara	7185'
Codell	7462'
J Sand	7881'

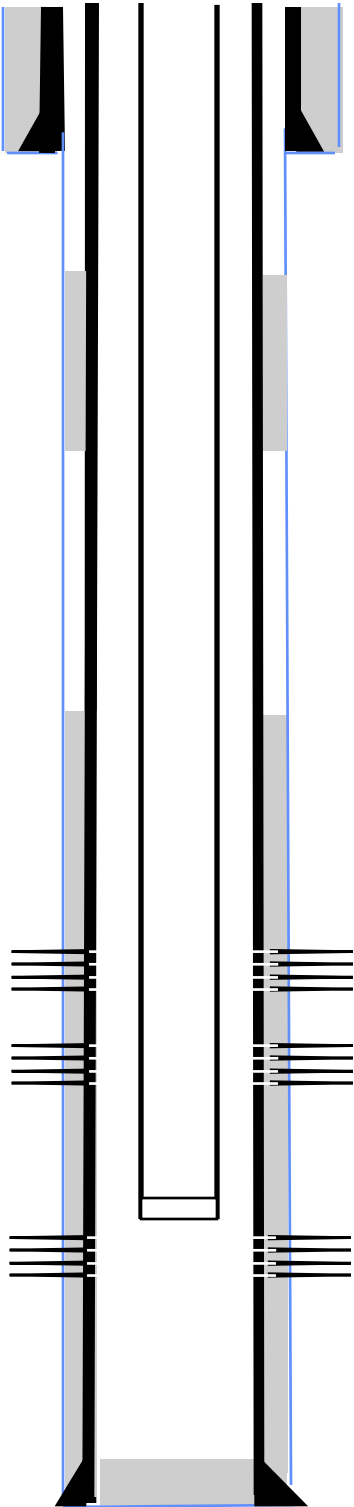

Surface Casing and Cement
8 5/8" , landed @ 998',cemented with 365 sxs

Main Hole
7-7/8" to TD

Production Casing and Cement
4-1/2" , landed @ 8059',cemented with 645 sxs

CBP
Set @ 7210'. 10-01-12
Drilled out on 10-03-12

Perf'd the Niobrara 7251'-7263' @ 4 spf
Frac'd the Niobrara 7251'-7263', (48 holes), w/ 97,314 gals 18 # Vistar Hybrid cross linked gel containing 251,120 # 30/50 sand. 09-23-12

CFP
Set @ 7320' 09-23-12
Drilled out on 10-03-12

Perf'd the Codell from 7464'-7481' @ 3 spf
Frac'd the Codell 7464'-7481' (51 holes) w/ 99,666 gal 22# Vistar Hybrid cross linked gel containing 250,760 # 30/50 sand. 09-22-12

CFP
Set @ 7530'. 09-22-12
Drilled out on 10-03-12

Perf'd the J Sand 7896'-7920' @ 2 spf
Frac'd J-Sand 7896'-7920', (48 holes)w/ 63,564 gal 18 # Vistar Hybrid cross linked gel containing 250,480# 20/40 Sand. 09-21-12

Production Tubing
2-3/8" tubing, set @ 7872'

8074' — Driller's TD