SCHLUMBERGER
Array Induction Imager Tool
Gamma Ray
Caliper
Bit Size
Deep Induction
Medium Induction
Shallow Induction
Spherically Focused Resistivity
Rt
Rxo
Mud Type
Mud Density
Mud Resistivity
Mud Filtrate Resistivity
Mud Cake Resistivity
Source of Sample
Rm @ Measured Temperature
Rmf @ Measured Temperature
Rmc @ Measured Temperature
Maximum Recorded Temperature
Circulation Stopped Time
Logger on Bottom Time
Logging Unit Number
Logging Engineer's Name
Witnessed By
Run Number
Service Order
Permanent Datum
Elevation
Log Measured From
Drilling Measured From
Elevation of Kelly Bushing
Elevation of Derrick Floor
Elevation of Ground Level
Date
Depth Driller
Depth Logger
Bottom Logged Interval
Top Logged Interval
Casing Driller Size @ Depth
Casing Logger Size @ Depth
Bit Size
Type Fluid in Hole
Density
Viscosity
Ph
Fluid Loss

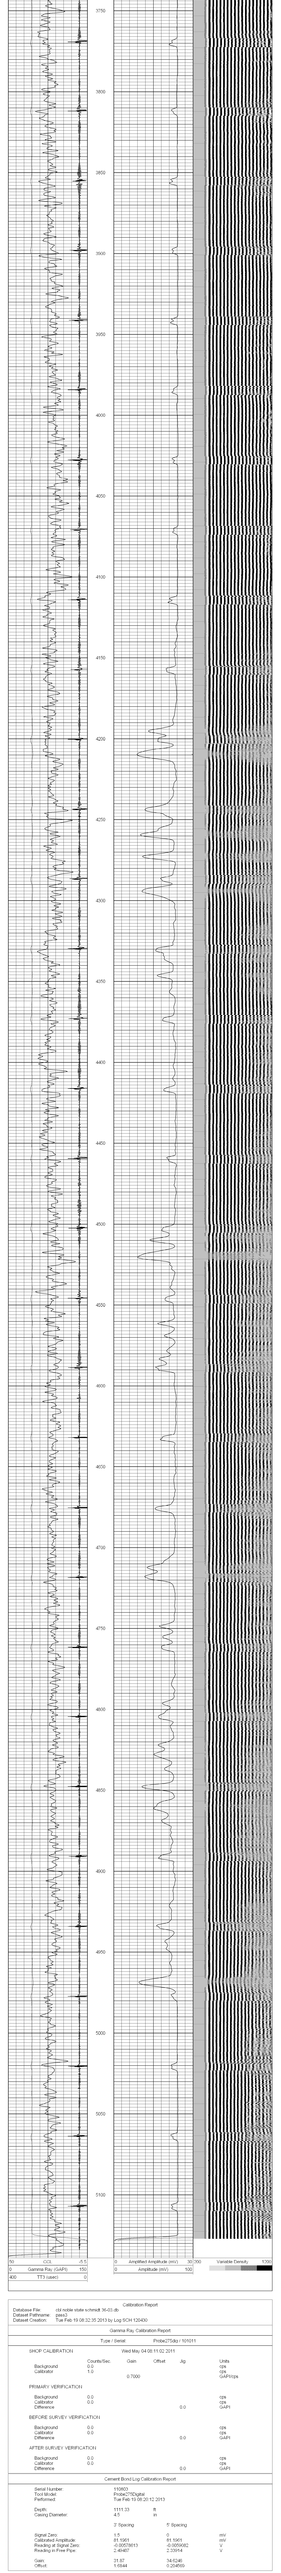

Calibration Report

Database File: c|d noble state w3mdt 36-03.db
Dataset Pathname: pass3
Dataset Creation: Tue Feb 19 08:32:35 2013 by Log SCH 120430

Gamma Ray Calibration Report

Tune / Serial: Probe2TSdp / 105011

Wed May 04 09:15:02 2011

	Counts/Sec	Gain	Offset	Ag	Units
SHOP CALIBRATION					
Background	0.0				cps
Calibrator	1.0				cps
		0.7000			GAPI/cps
PRIMARY VERIFICATION					
Background	0.0				cps
Calibrator	0.0				cps
Difference			0.0		GAPI
BEFORE SURVEY VERIFICATION					
Background	0.0				cps
Calibrator	0.0				cps
Difference			0.0		GAPI
AFTER SURVEY VERIFICATION					
Background	0.0				cps
Calibrator	0.0				cps
Difference			0.0		GAPI

Cement Bond Log Calibration Report

Serial Number:	110903		
Tool Model:	Probe2TDigital		
Performed:	Tue Feb 19 08:20:12 2013		
Depth:	1111.33	ft	
Casing Diameter:	4.5	in	
	3' Spacing	5' Spacing	
Signal Zero:	0	0	mV
Calibrated Amplitude:	81.1901	81.1901	mV
Reading at Signal Zero:	-0.00573813	-0.0059082	V
Reading in Free Pipe:	2.49467	2.33914	V
Gain:	31.97	14.6246	
Offset:	1.6544	0.204809	