

**NOBLE ENERGY INC.**  
**LOUSTALET B15-16**  
**SESE 15-5N-64W**  
**700' FSL & 760' FEL**  
**Weld County, Colorado**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**6/17/2013**

API: 05-123-15015  
 COGCC #

GL Elev: 4571  
 KB Elev: 4581


**Spud Date:**

**Surface Casing :**  
 8 5/8" 24# @ 343'  
 Cement: 220 sx  
 TOC: Surface

**Csg Patch @5196'**

**TOC @ 5768' (CBL)**

**Production Casing :**  
 2 7/8" 6.50# @ 6913'  
 Cement: 325 sx  
 TD: 7/21/1991

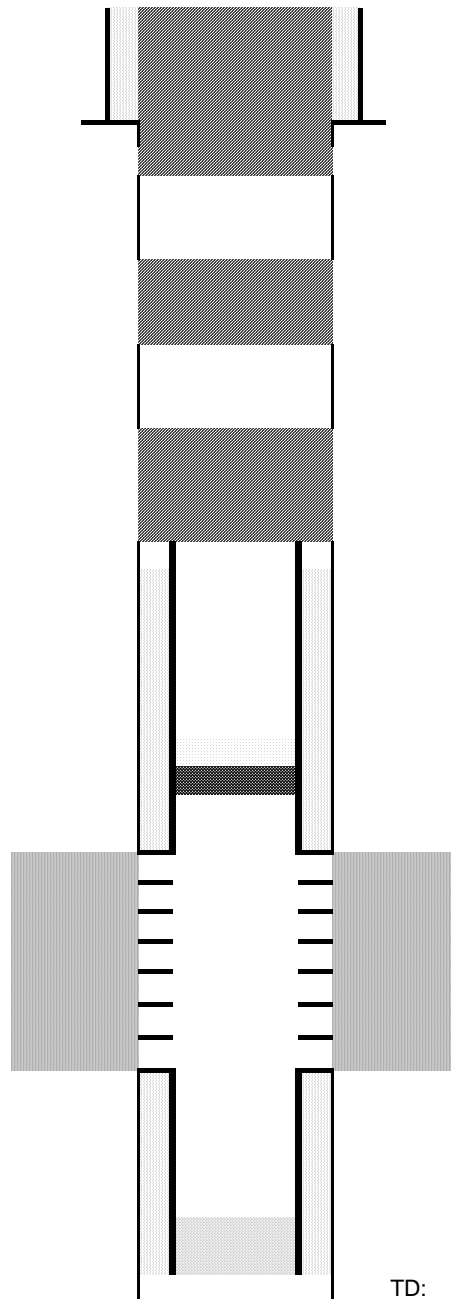

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 440'  
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Cut and pull csg ~5000'  
 100 sx Stub Plug

CIBP @ 6589' w/ 2 sx cement on top  
 (Balanced plug optional if cannot set CIBP, will tag plug)

Codell Perforations 6689' - 6707'

TD: 6932