

Well

Operator

Location

County

State

Field

Footages

IONE 6-0-8

EnCana Oil & Gas (USA) Inc.

NENE Section 8-T2N-R66W

SPINDLE

Colorado

Wattenberg

160' FNL; 180' FEL

Spud Date:

12-12-2012

TD Date:

12-15-2012

Log Tops

Sussex

4664'

Niobrara

7296'

Codell


7565'

J Sand

7999'

Production Tubing

2-3/8" tubing, set @ 7984'

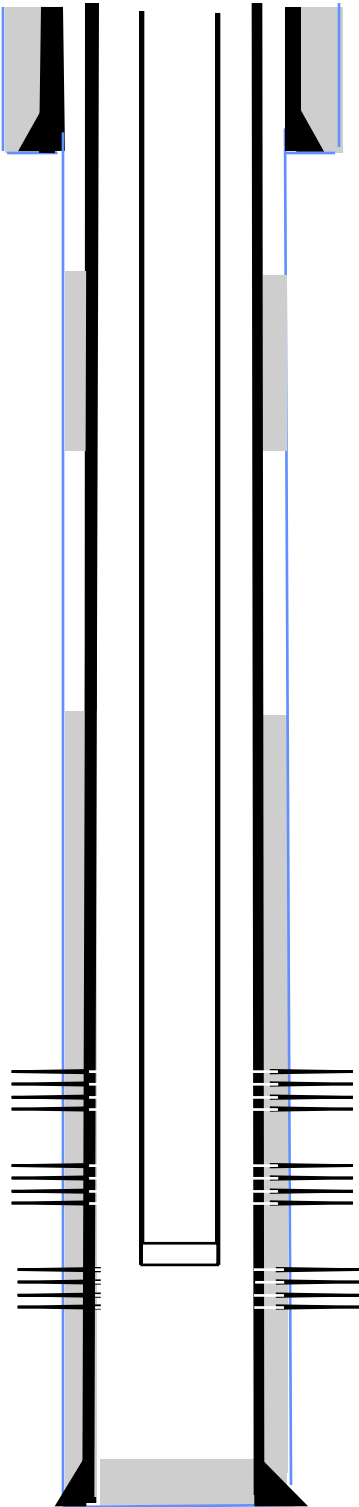

8175'

—

Driller's TD

Surface Casing and Cement

8 5/8" ,landed @ 838' cemented with 325 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , landed @ 8163',cemented with 650 sxs

CBP

Set @ 7290'. 03-14-15

Drilled out on 03-15-13

Perf'd the Niobrara from 7343' – 7357' @ 4 spf

Frac'd the Niobrara with 247,040# 30/50, with 3563 bbls total fluid.

02-15-13

CFP

Set @ 7390'. 02-15-13

Drilled out on 03-15-13

Perf'd the Codell from 7430' – 7447', 7566' – 7582' @ 2 spf

Frac'd the Codell with 252,040# 30/50, with 2766 bbls total fluid.

02-15-13

CFP

Set @ 7630'. 02-15-13

Drilled out on 03-15-13

Perf the J Sand from 8007' – 8013', 8031' – 8050' @ 2 spf

Frac'd the J Sand with 250,160# 20/40, with 3884 bbls total fluid.

02-15-13