

NOBLE ENERGY INC.
D CASTOR 1
NENW 21-8N-59W
660' FNL & 1980' FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
6/27/2013

API: 05-123-05528
 COGCC #


GL Elev: 4809
 KB Elev: 4814

Spud Date:

Surface Casing :
 8 5/8" 28# @ 127'
 Cement: 85 sx
 TOC: Surface

TOC determined by CBL
(Approx 6200')

Production Casing :
 4 1/2" 11.60# @ 6700'
 Cement: 150 sx
 TD: 8/13/1975

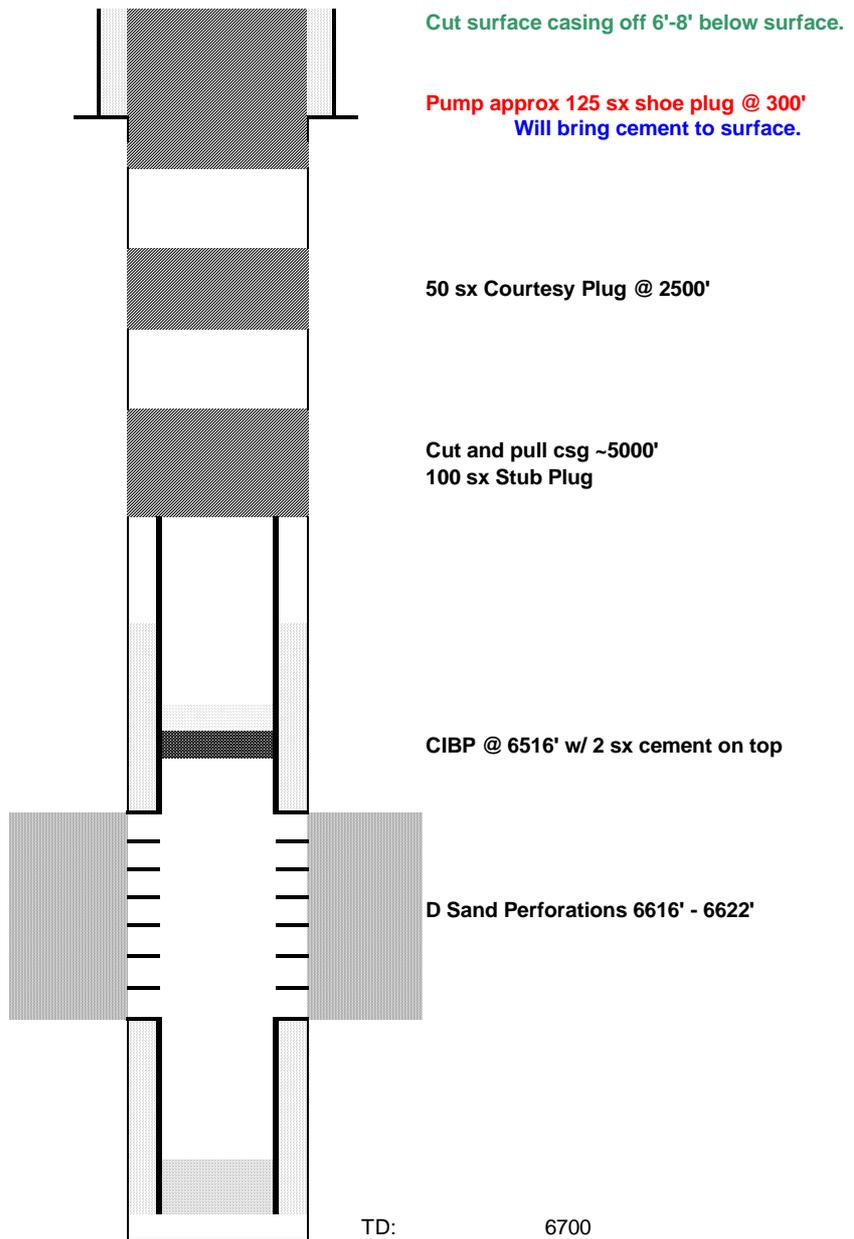

Cut surface casing off 6'-8' below surface.

Pump approx 125 sx shoe plug @ 300'
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Cut and pull csg ~5000'
 100 sx Stub Plug

CIBP @ 6516' w/ 2 sx cement on top

D Sand Perforations 6616' - 6622'

TD: 6700