

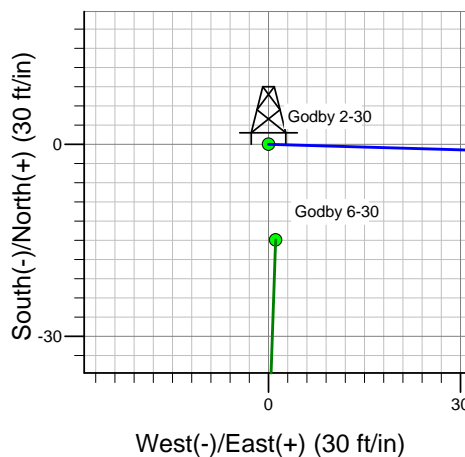


Bayswater Exploration & Production, LLC

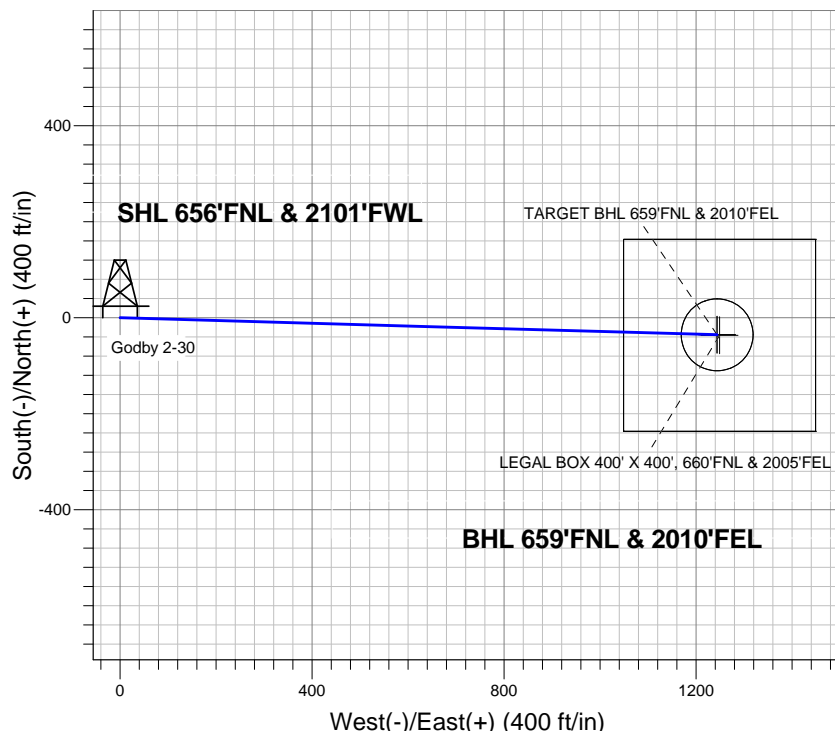

Godby 2-30
 Plan #1 (06-11-13)
 11:10, June 13 2013

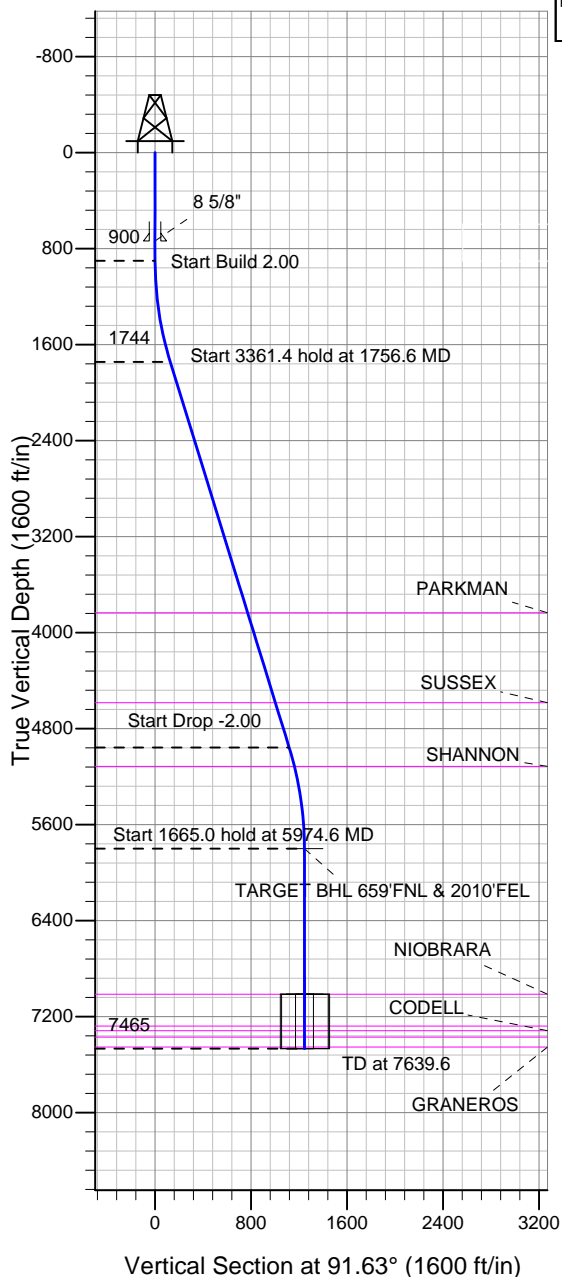

Azimuths to True North
 Magnetic North: 8.53°

Magnetic Field
 Strength: 53032.8nT
 Dip Angle: 67.12°
 Date: 6/11/2013
 Model: IGRF200510

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude	Shape
TARGET BHL 659'FNL & 2010'FEL	5800.0	-35.3	1243.9	40.551595	-104.703829	Point
LEGAL BOX 400' X 400', 660'FNL & 2005'FEL	7013.0	-36.3	1248.9	40.551592	-104.703811	Rectangle (Sides: L400.0 W400.0)
TARGET CIRCLE 659'FNL & 2010'FEL	7013.0	-35.3	1243.9	40.551595	-104.703829	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	900.0	0.00	0.00	900.0	0.0	0.0	0.00	0.00	0.0	
3	1756.6	17.13	91.63	1743.9	-3.6	127.1	2.00	91.63	127.1	
4	5118.0	17.13	91.63	4956.1	-31.7	1116.8	0.00	0.00	1117.3	
5	5974.6	0.00	0.00	5800.0	-35.3	1243.9	2.00	180.00	1244.4	TARGET BHL 659'FNL & 2010'FEL
6	7639.6	0.00	0.00	7465.0	-35.3	1243.9	0.00	0.00	1244.4	



Bayswater Exploration & Production, LLC

SEC.30-T7N-R65W

Godby 30-B Pad Sec.30-T7N-R65W

Godby 2-30

Wellbore #1

Plan: Plan #1 (06-11-13)

Standard Planning Report

13 June, 2013



Database:	Landmark	Local Co-ordinate Reference:	Well Godby 2-30
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Project:	SEC.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site:	Godby 30-B Pad Sec.30-T7N-R65W	North Reference:	True
Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (06-11-13)		

Project	SEC.30-T7N-R65W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		Using Well Reference Point
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	Godby 30-B Pad Sec.30-T7N-R65W				
Site Position:		Northing:	1,444,789.46 ft	Latitude:	40.551651
From:	Lat/Long	Easting:	3,220,000.20 ft	Longitude:	-104.708301
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.51 °

Well	Godby 2-30					
Well Position	+N-S	14.9 ft	Northing:	1,444,804.37 ft	Latitude:	40.551692
	+E-W	-1.1 ft	Easting:	3,219,998.95 ft	Longitude:	-104.708305
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	4,865.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	6/11/2013	8.53	67.12	53,033

Design	Plan #1 (06-11-13)			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	91.63

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,756.6	17.13	91.63	1,743.9	-3.6	127.1	2.00	2.00	0.00	91.63	
5,118.0	17.13	91.63	4,956.1	-31.7	1,116.8	0.00	0.00	0.00	0.00	
5,974.6	0.00	0.00	5,800.0	-35.3	1,243.9	2.00	-2.00	0.00	180.00	TARGET BHL 659'I
7,639.6	0.00	0.00	7,465.0	-35.3	1,243.9	0.00	0.00	0.00	0.00	

Database:	Landmark	Local Co-ordinate Reference:	Well Godby 2-30
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Project:	SEC.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site:	Godby 30-B Pad Sec.30-T7N-R65W	North Reference:	True
Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (06-11-13)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
40.0	0.00	0.00	40.0	0.0	0.0	0.0	0.00	0.00	0.00
80.0	0.00	0.00	80.0	0.0	0.0	0.0	0.00	0.00	0.00
120.0	0.00	0.00	120.0	0.0	0.0	0.0	0.00	0.00	0.00
160.0	0.00	0.00	160.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
240.0	0.00	0.00	240.0	0.0	0.0	0.0	0.00	0.00	0.00
280.0	0.00	0.00	280.0	0.0	0.0	0.0	0.00	0.00	0.00
320.0	0.00	0.00	320.0	0.0	0.0	0.0	0.00	0.00	0.00
360.0	0.00	0.00	360.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
440.0	0.00	0.00	440.0	0.0	0.0	0.0	0.00	0.00	0.00
480.0	0.00	0.00	480.0	0.0	0.0	0.0	0.00	0.00	0.00
520.0	0.00	0.00	520.0	0.0	0.0	0.0	0.00	0.00	0.00
560.0	0.00	0.00	560.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
640.0	0.00	0.00	640.0	0.0	0.0	0.0	0.00	0.00	0.00
680.0	0.00	0.00	680.0	0.0	0.0	0.0	0.00	0.00	0.00
720.0	0.00	0.00	720.0	0.0	0.0	0.0	0.00	0.00	0.00
735.0	0.00	0.00	735.0	0.0	0.0	0.0	0.00	0.00	0.00
8 5/8"									
760.0	0.00	0.00	760.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
840.0	0.00	0.00	840.0	0.0	0.0	0.0	0.00	0.00	0.00
880.0	0.00	0.00	880.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
920.0	0.40	91.63	920.0	0.0	0.1	0.1	2.00	2.00	0.00
960.0	1.20	91.63	960.0	0.0	0.6	0.6	2.00	2.00	0.00
1,000.0	2.00	91.63	1,000.0	0.0	1.7	1.7	2.00	2.00	0.00
1,040.0	2.80	91.63	1,039.9	-0.1	3.4	3.4	2.00	2.00	0.00
1,080.0	3.60	91.63	1,079.9	-0.2	5.7	5.7	2.00	2.00	0.00
1,120.0	4.40	91.63	1,119.8	-0.2	8.4	8.4	2.00	2.00	0.00
1,160.0	5.20	91.63	1,159.6	-0.3	11.8	11.8	2.00	2.00	0.00
1,200.0	6.00	91.63	1,199.5	-0.4	15.7	15.7	2.00	2.00	0.00
1,240.0	6.80	91.63	1,239.2	-0.6	20.1	20.2	2.00	2.00	0.00
1,280.0	7.60	91.63	1,278.9	-0.7	25.2	25.2	2.00	2.00	0.00
1,320.0	8.40	91.63	1,318.5	-0.9	30.7	30.7	2.00	2.00	0.00
1,360.0	9.20	91.63	1,358.0	-1.0	36.8	36.9	2.00	2.00	0.00
1,400.0	10.00	91.63	1,397.5	-1.2	43.5	43.5	2.00	2.00	0.00
1,440.0	10.80	91.63	1,436.8	-1.4	50.7	50.7	2.00	2.00	0.00
1,480.0	11.60	91.63	1,476.0	-1.7	58.5	58.5	2.00	2.00	0.00
1,520.0	12.40	91.63	1,515.2	-1.9	66.8	66.8	2.00	2.00	0.00
1,560.0	13.20	91.63	1,554.2	-2.1	75.7	75.7	2.00	2.00	0.00
1,600.0	14.00	91.63	1,593.1	-2.4	85.1	85.1	2.00	2.00	0.00
1,640.0	14.80	91.63	1,631.8	-2.7	95.0	95.0	2.00	2.00	0.00
1,680.0	15.60	91.63	1,670.4	-3.0	105.5	105.5	2.00	2.00	0.00
1,720.0	16.40	91.63	1,708.8	-3.3	116.5	116.6	2.00	2.00	0.00
1,756.6	17.13	91.63	1,743.9	-3.6	127.1	127.1	2.00	2.00	0.00
1,760.0	17.13	91.63	1,747.1	-3.6	128.1	128.1	0.00	0.00	0.00
1,800.0	17.13	91.63	1,785.4	-4.0	139.8	139.9	0.00	0.00	0.00
1,840.0	17.13	91.63	1,823.6	-4.3	151.6	151.7	0.00	0.00	0.00
1,880.0	17.13	91.63	1,861.8	-4.6	163.4	163.5	0.00	0.00	0.00
1,920.0	17.13	91.63	1,900.0	-5.0	175.2	175.2	0.00	0.00	0.00
1,960.0	17.13	91.63	1,938.3	-5.3	187.0	187.0	0.00	0.00	0.00

Database:	Landmark	Local Co-ordinate Reference:	Well Godby 2-30
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Project:	SEC.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site:	Godby 30-B Pad Sec.30-T7N-R65W	North Reference:	True
Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (06-11-13)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
2,000.0	17.13	91.63	1,976.5	-5.6	198.7	198.8	0.00	0.00	0.00
2,040.0	17.13	91.63	2,014.7	-6.0	210.5	210.6	0.00	0.00	0.00
2,080.0	17.13	91.63	2,052.9	-6.3	222.3	222.4	0.00	0.00	0.00
2,120.0	17.13	91.63	2,091.2	-6.6	234.1	234.2	0.00	0.00	0.00
2,160.0	17.13	91.63	2,129.4	-7.0	245.8	245.9	0.00	0.00	0.00
2,200.0	17.13	91.63	2,167.6	-7.3	257.6	257.7	0.00	0.00	0.00
2,240.0	17.13	91.63	2,205.8	-7.6	269.4	269.5	0.00	0.00	0.00
2,280.0	17.13	91.63	2,244.1	-8.0	281.2	281.3	0.00	0.00	0.00
2,320.0	17.13	91.63	2,282.3	-8.3	293.0	293.1	0.00	0.00	0.00
2,360.0	17.13	91.63	2,320.5	-8.6	304.7	304.9	0.00	0.00	0.00
2,400.0	17.13	91.63	2,358.7	-9.0	316.5	316.6	0.00	0.00	0.00
2,440.0	17.13	91.63	2,397.0	-9.3	328.3	328.4	0.00	0.00	0.00
2,480.0	17.13	91.63	2,435.2	-9.6	340.1	340.2	0.00	0.00	0.00
2,520.0	17.13	91.63	2,473.4	-10.0	351.8	352.0	0.00	0.00	0.00
2,560.0	17.13	91.63	2,511.6	-10.3	363.6	363.8	0.00	0.00	0.00
2,600.0	17.13	91.63	2,549.9	-10.7	375.4	375.6	0.00	0.00	0.00
2,640.0	17.13	91.63	2,588.1	-11.0	387.2	387.3	0.00	0.00	0.00
2,680.0	17.13	91.63	2,626.3	-11.3	399.0	399.1	0.00	0.00	0.00
2,720.0	17.13	91.63	2,664.5	-11.7	410.7	410.9	0.00	0.00	0.00
2,760.0	17.13	91.63	2,702.8	-12.0	422.5	422.7	0.00	0.00	0.00
2,800.0	17.13	91.63	2,741.0	-12.3	434.3	434.5	0.00	0.00	0.00
2,840.0	17.13	91.63	2,779.2	-12.7	446.1	446.2	0.00	0.00	0.00
2,880.0	17.13	91.63	2,817.4	-13.0	457.8	458.0	0.00	0.00	0.00
2,920.0	17.13	91.63	2,855.7	-13.3	469.6	469.8	0.00	0.00	0.00
2,960.0	17.13	91.63	2,893.9	-13.7	481.4	481.6	0.00	0.00	0.00
3,000.0	17.13	91.63	2,932.1	-14.0	493.2	493.4	0.00	0.00	0.00
3,040.0	17.13	91.63	2,970.4	-14.3	505.0	505.2	0.00	0.00	0.00
3,080.0	17.13	91.63	3,008.6	-14.7	516.7	516.9	0.00	0.00	0.00
3,120.0	17.13	91.63	3,046.8	-15.0	528.5	528.7	0.00	0.00	0.00
3,160.0	17.13	91.63	3,085.0	-15.3	540.3	540.5	0.00	0.00	0.00
3,200.0	17.13	91.63	3,123.3	-15.7	552.1	552.3	0.00	0.00	0.00
3,240.0	17.13	91.63	3,161.5	-16.0	563.8	564.1	0.00	0.00	0.00
3,280.0	17.13	91.63	3,199.7	-16.3	575.6	575.9	0.00	0.00	0.00
3,320.0	17.13	91.63	3,237.9	-16.7	587.4	587.6	0.00	0.00	0.00
3,360.0	17.13	91.63	3,276.2	-17.0	599.2	599.4	0.00	0.00	0.00
3,400.0	17.13	91.63	3,314.4	-17.3	611.0	611.2	0.00	0.00	0.00
3,440.0	17.13	91.63	3,352.6	-17.7	622.7	623.0	0.00	0.00	0.00
3,480.0	17.13	91.63	3,390.8	-18.0	634.5	634.8	0.00	0.00	0.00
3,520.0	17.13	91.63	3,429.1	-18.3	646.3	646.5	0.00	0.00	0.00
3,560.0	17.13	91.63	3,467.3	-18.7	658.1	658.3	0.00	0.00	0.00
3,600.0	17.13	91.63	3,505.5	-19.0	669.8	670.1	0.00	0.00	0.00
3,640.0	17.13	91.63	3,543.7	-19.3	681.6	681.9	0.00	0.00	0.00
3,680.0	17.13	91.63	3,582.0	-19.7	693.4	693.7	0.00	0.00	0.00
3,720.0	17.13	91.63	3,620.2	-20.0	705.2	705.5	0.00	0.00	0.00
3,760.0	17.13	91.63	3,658.4	-20.3	717.0	717.2	0.00	0.00	0.00
3,800.0	17.13	91.63	3,696.6	-20.7	728.7	729.0	0.00	0.00	0.00
3,840.0	17.13	91.63	3,734.9	-21.0	740.5	740.8	0.00	0.00	0.00
3,880.0	17.13	91.63	3,773.1	-21.3	752.3	752.6	0.00	0.00	0.00
3,920.0	17.13	91.63	3,811.3	-21.7	764.1	764.4	0.00	0.00	0.00
3,942.7	17.13	91.63	3,833.0	-21.9	770.8	771.1	0.00	0.00	0.00
PARKMAN									
3,960.0	17.13	91.63	3,849.5	-22.0	775.8	776.2	0.00	0.00	0.00
4,000.0	17.13	91.63	3,887.8	-22.3	787.6	787.9	0.00	0.00	0.00

Database:	Landmark	Local Co-ordinate Reference:	Well Godby 2-30
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Project:	SEC.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site:	Godby 30-B Pad Sec.30-T7N-R65W	North Reference:	True
Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (06-11-13)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,040.0	17.13	91.63	3,926.0	-22.7	799.4	799.7	0.00	0.00	0.00
4,080.0	17.13	91.63	3,964.2	-23.0	811.2	811.5	0.00	0.00	0.00
4,120.0	17.13	91.63	4,002.4	-23.3	823.0	823.3	0.00	0.00	0.00
4,160.0	17.13	91.63	4,040.7	-23.7	834.7	835.1	0.00	0.00	0.00
4,200.0	17.13	91.63	4,078.9	-24.0	846.5	846.9	0.00	0.00	0.00
4,240.0	17.13	91.63	4,117.1	-24.4	858.3	858.6	0.00	0.00	0.00
4,280.0	17.13	91.63	4,155.3	-24.7	870.1	870.4	0.00	0.00	0.00
4,320.0	17.13	91.63	4,193.6	-25.0	881.8	882.2	0.00	0.00	0.00
4,360.0	17.13	91.63	4,231.8	-25.4	893.6	894.0	0.00	0.00	0.00
4,400.0	17.13	91.63	4,270.0	-25.7	905.4	905.8	0.00	0.00	0.00
4,440.0	17.13	91.63	4,308.2	-26.0	917.2	917.5	0.00	0.00	0.00
4,480.0	17.13	91.63	4,346.5	-26.4	929.0	929.3	0.00	0.00	0.00
4,520.0	17.13	91.63	4,384.7	-26.7	940.7	941.1	0.00	0.00	0.00
4,560.0	17.13	91.63	4,422.9	-27.0	952.5	952.9	0.00	0.00	0.00
4,600.0	17.13	91.63	4,461.1	-27.4	964.3	964.7	0.00	0.00	0.00
4,640.0	17.13	91.63	4,499.4	-27.7	976.1	976.5	0.00	0.00	0.00
4,680.0	17.13	91.63	4,537.6	-28.0	987.8	988.2	0.00	0.00	0.00
4,720.0	17.13	91.63	4,575.8	-28.4	999.6	1,000.0	0.00	0.00	0.00
4,727.5	17.13	91.63	4,583.0	-28.4	1,001.8	1,002.2	0.00	0.00	0.00
SUSSEX									
4,760.0	17.13	91.63	4,614.0	-28.7	1,011.4	1,011.8	0.00	0.00	0.00
4,800.0	17.13	91.63	4,652.3	-29.0	1,023.2	1,023.6	0.00	0.00	0.00
4,840.0	17.13	91.63	4,690.5	-29.4	1,035.0	1,035.4	0.00	0.00	0.00
4,880.0	17.13	91.63	4,728.7	-29.7	1,046.7	1,047.2	0.00	0.00	0.00
4,920.0	17.13	91.63	4,766.9	-30.0	1,058.5	1,058.9	0.00	0.00	0.00
4,960.0	17.13	91.63	4,805.2	-30.4	1,070.3	1,070.7	0.00	0.00	0.00
5,000.0	17.13	91.63	4,843.4	-30.7	1,082.1	1,082.5	0.00	0.00	0.00
5,040.0	17.13	91.63	4,881.6	-31.0	1,093.8	1,094.3	0.00	0.00	0.00
5,080.0	17.13	91.63	4,919.8	-31.4	1,105.6	1,106.1	0.00	0.00	0.00
5,118.0	17.13	91.63	4,956.1	-31.7	1,116.8	1,117.3	0.00	0.00	0.00
5,120.0	17.09	91.63	4,958.1	-31.7	1,117.4	1,117.9	2.00	-2.00	0.00
5,160.0	16.29	91.63	4,996.4	-32.0	1,128.9	1,129.3	2.00	-2.00	0.00
5,200.0	15.49	91.63	5,034.8	-32.3	1,139.8	1,140.3	2.00	-2.00	0.00
5,240.0	14.69	91.63	5,073.5	-32.6	1,150.2	1,150.7	2.00	-2.00	0.00
5,280.0	13.89	91.63	5,112.2	-32.9	1,160.1	1,160.6	2.00	-2.00	0.00
5,280.8	13.88	91.63	5,113.0	-32.9	1,160.3	1,160.8	2.00	-2.00	0.00
SHANNON									
5,320.0	13.09	91.63	5,151.1	-33.2	1,169.4	1,169.9	2.00	-2.00	0.00
5,360.0	12.29	91.63	5,190.1	-33.4	1,178.2	1,178.7	2.00	-2.00	0.00
5,400.0	11.49	91.63	5,229.3	-33.7	1,186.5	1,186.9	2.00	-2.00	0.00
5,440.0	10.69	91.63	5,268.5	-33.9	1,194.2	1,194.6	2.00	-2.00	0.00
5,480.0	9.89	91.63	5,307.9	-34.1	1,201.3	1,201.8	2.00	-2.00	0.00
5,520.0	9.09	91.63	5,347.4	-34.3	1,207.9	1,208.4	2.00	-2.00	0.00
5,560.0	8.29	91.63	5,386.9	-34.4	1,213.9	1,214.4	2.00	-2.00	0.00
5,600.0	7.49	91.63	5,426.5	-34.6	1,219.4	1,219.9	2.00	-2.00	0.00
5,640.0	6.69	91.63	5,466.2	-34.7	1,224.4	1,224.9	2.00	-2.00	0.00
5,680.0	5.89	91.63	5,506.0	-34.9	1,228.7	1,229.2	2.00	-2.00	0.00
5,720.0	5.09	91.63	5,545.8	-35.0	1,232.6	1,233.1	2.00	-2.00	0.00
5,760.0	4.29	91.63	5,585.6	-35.1	1,235.8	1,236.3	2.00	-2.00	0.00
5,800.0	3.49	91.63	5,625.6	-35.1	1,238.5	1,239.0	2.00	-2.00	0.00
5,840.0	2.69	91.63	5,665.5	-35.2	1,240.7	1,241.2	2.00	-2.00	0.00
5,880.0	1.89	91.63	5,705.5	-35.2	1,242.3	1,242.8	2.00	-2.00	0.00
5,920.0	1.09	91.63	5,745.5	-35.3	1,243.3	1,243.8	2.00	-2.00	0.00
5,960.0	0.29	91.63	5,785.4	-35.3	1,243.8	1,244.3	2.00	-2.00	0.00

Database:	Landmark	Local Co-ordinate Reference:	Well Godby 2-30
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Project:	SEC.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site:	Godby 30-B Pad Sec.30-T7N-R65W	North Reference:	True
Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (06-11-13)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,974.6	0.00	0.00	5,800.0	-35.3	1,243.9	1,244.4	2.00	-2.00	0.00
TARGET BHL 659'FNL & 2010'FEL									
6,000.0	0.00	0.00	5,825.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,040.0	0.00	0.00	5,865.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,080.0	0.00	0.00	5,905.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,120.0	0.00	0.00	5,945.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,160.0	0.00	0.00	5,985.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,200.0	0.00	0.00	6,025.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,240.0	0.00	0.00	6,065.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,280.0	0.00	0.00	6,105.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,320.0	0.00	0.00	6,145.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,360.0	0.00	0.00	6,185.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,400.0	0.00	0.00	6,225.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,440.0	0.00	0.00	6,265.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,480.0	0.00	0.00	6,305.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,520.0	0.00	0.00	6,345.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,560.0	0.00	0.00	6,385.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,600.0	0.00	0.00	6,425.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,640.0	0.00	0.00	6,465.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,680.0	0.00	0.00	6,505.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,720.0	0.00	0.00	6,545.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,760.0	0.00	0.00	6,585.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,800.0	0.00	0.00	6,625.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,840.0	0.00	0.00	6,665.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,880.0	0.00	0.00	6,705.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,920.0	0.00	0.00	6,745.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
6,960.0	0.00	0.00	6,785.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,000.0	0.00	0.00	6,825.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,040.0	0.00	0.00	6,865.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,080.0	0.00	0.00	6,905.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,120.0	0.00	0.00	6,945.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,160.0	0.00	0.00	6,985.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,187.6	0.00	0.00	7,013.0	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
NIORARA - TARGET CIRCLE 659'FNL & 2010'FEL - LEGAL BOX 400' X 400', 660'FNL & 2005'FEL									
7,200.0	0.00	0.00	7,025.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,240.0	0.00	0.00	7,065.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,280.0	0.00	0.00	7,105.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,320.0	0.00	0.00	7,145.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,360.0	0.00	0.00	7,185.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,400.0	0.00	0.00	7,225.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,440.0	0.00	0.00	7,265.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,452.6	0.00	0.00	7,278.0	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
FORT HAYS									
7,480.0	0.00	0.00	7,305.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,490.6	0.00	0.00	7,316.0	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
CODELL									
7,520.0	0.00	0.00	7,345.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,544.6	0.00	0.00	7,370.0	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
GREENHORN									
7,560.0	0.00	0.00	7,385.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,600.0	0.00	0.00	7,425.4	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
7,626.6	0.00	0.00	7,452.0	-35.3	1,243.9	1,244.4	0.00	0.00	0.00
GRANEROS									

Database:	Landmark	Local Co-ordinate Reference:	Well Godby 2-30
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Project:	SEC.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site:	Godby 30-B Pad Sec.30-T7N-R65W	North Reference:	True
Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (06-11-13)		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
7,639.6	0.00	0.00	7,465.0	-35.3	1,243.9	1,244.4	0.00	0.00	0.00	

Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude	
- hit/miss target										
- Shape										
TARGET CIRCLE 659	0.00	0.00	7,013.0	-35.3	1,243.9	1,444,780.19	3,221,243.04	40.551595	-104.703829	
- plan hits target center										
- Circle (radius 75.0)										
TARGET BHL 659'FN	0.00	0.00	5,800.0	-35.3	1,243.9	1,444,780.19	3,221,243.04	40.551595	-104.703829	
- plan hits target center										
- Point										
LEGAL BOX 400' X 400'	0.00	0.00	7,013.0	-36.3	1,248.9	1,444,779.22	3,221,248.09	40.551592	-104.703811	
- plan misses target center by 5.1ft at 7187.6ft MD (7013.0 TVD, -35.3 N, 1243.9 E)										
- Rectangle (sides W400.0 H400.0 D452.0)										

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")	
735.0	735.0	8 5/8"	8-5/8	12-1/4	

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
3,942.7	3,833.0	PARKMAN		0.00		
4,727.5	4,583.0	SUSSEX		0.00		
5,280.8	5,113.0	SHANNON		0.00		
7,187.6	7,013.0	NIOBRARA		0.00		
7,452.6	7,278.0	FORT HAYS		0.00		
7,490.6	7,316.0	CODELL		0.00		
7,544.6	7,370.0	GREENHORN		0.00		
7,626.6	7,452.0	GRANEROS		0.00		



Directional

Bayswater Exploration & Production, LLC

SEC.30-T7N-R65W

Godby 30-B Pad Sec.30-T7N-R65W

Godby 2-30

Wellbore #1

Plan #1 (06-11-13)

Anticollision Report

13 June, 2013



Directional

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Godby 2-30
Project:	SEC.30-T7N-R65W	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Reference Site:	Godby 30-B Pad Sec.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site Error:	0.0ft	North Reference:	True
Reference Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (06-11-13)	Offset TVD Reference:	Offset Datum

Reference	Plan #1 (06-11-13)		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 10,000.0ft	Error Surface:	Elliptical Conic
Warning Levels Evaluated at:	2.00 Sigma		

Survey Tool Program	Date 6/11/2013			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.0	7,639.6	Plan #1 (06-11-13) (Wellbore #1)	MWD	MWD - Standard

Summary						
Site Name	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Separation Factor	Warning
Offwell Well - Wellbore - Design						
Godby 30-B Pad Sec.30-T7N-R65W						
Godby 6-30 - Wellbore #1 - Plan #1 (06-11-13)	400.0	400.0	15.0	13.4	9.515 CC, ES	
Godby 6-30 - Wellbore #1 - Plan #1 (06-11-13)	500.0	499.4	16.7	14.7	8.371 SF	

Offset Design Godby 30-B Pad Sec.30-T7N-R65W - Godby 6-30 - Wellbore #1 - Plan #1 (06-11-13)												
Survey Program: 0-MWD												
Reference												
Measured Depth (ft)	Vertical Depth (ft)	Offset Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Semi Major Axis Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor
0.0	0.0	0.0	0.0	0.0	0.0	175.74	-14.9	1.1	15.0	15.0	0.00	N/A
100.0	100.0	100.0	100.0	0.1	0.1	175.74	-14.9	1.1	15.0	14.7	0.22	66.605
200.0	200.0	200.0	200.0	0.3	0.3	175.74	-14.9	1.1	15.0	14.3	0.67	22.202
300.0	300.0	300.0	300.0	0.6	0.6	175.74	-14.9	1.1	15.0	13.8	1.12	13.321
400.0	400.0	400.0	400.0	0.8	0.8	175.74	-14.9	1.1	15.0	13.4	1.57	9.515 CC, ES
500.0	500.0	499.4	499.4	1.0	1.0	176.38	-16.7	1.1	16.7	14.7	1.99	8.371 SF
600.0	600.0	598.6	598.5	1.2	1.2	177.69	-21.8	0.9	21.9	19.5	2.41	9.085
700.0	700.0	697.4	696.8	1.5	1.4	178.88	-30.3	0.6	30.5	27.7	2.85	10.704
800.0	800.0	795.4	794.1	1.7	1.6	179.73	-42.2	0.2	42.6	39.2	3.33	12.790
900.0	900.0	892.5	890.1	1.9	1.9	-179.69	-57.1	-0.3	58.0	54.1	3.85	15.075
1,000.0	1,000.0	988.5	984.3	2.1	2.3	89.98	-75.1	-0.9	76.7	72.6	4.18	18.368
1,100.0	1,099.8	1,083.0	1,076.5	2.3	2.7	92.52	-95.9	-1.6	98.9	94.3	4.62	21.401
1,200.0	1,199.5	1,175.8	1,166.3	2.5	3.1	95.34	-119.3	-2.4	124.7	119.6	5.09	24.504
1,300.0	1,298.7	1,270.7	1,257.7	2.8	3.6	98.26	-145.0	-3.3	153.1	147.5	5.59	27.391
1,400.0	1,397.5	1,365.8	1,349.2	3.1	4.1	101.18	-170.8	-4.1	182.6	176.5	6.13	29.798
1,500.0	1,495.6	1,460.2	1,440.1	3.4	4.6	104.03	-196.5	-5.0	213.4	206.7	6.72	31.743
1,600.0	1,593.1	1,553.9	1,530.3	3.8	5.1	106.78	-221.9	-5.8	245.7	238.3	7.38	33.316
1,700.0	1,689.6	1,646.9	1,619.7	4.2	5.6	109.41	-247.1	-6.7	279.7	271.6	8.09	34.583
1,756.6	1,743.9	1,699.0	1,669.9	4.5	5.9	110.83	-261.3	-7.2	299.8	291.3	8.52	35.195
1,800.0	1,785.4	1,738.9	1,708.3	4.7	6.1	112.15	-272.1	-7.5	315.5	306.7	8.87	35.574
1,900.0	1,880.9	1,830.9	1,796.8	5.2	6.6	114.75	-297.1	-8.4	352.2	342.5	9.69	36.333
2,000.0	1,976.5	1,922.8	1,885.3	5.8	7.1	116.86	-322.0	-9.2	389.4	378.9	10.54	36.963
2,100.0	2,072.1	2,014.7	1,973.7	6.3	7.6	118.61	-347.0	-10.0	427.0	415.7	11.39	37.496
2,200.0	2,167.6	2,106.7	2,062.2	6.9	8.1	120.08	-372.0	-10.9	464.9	452.7	12.25	37.954
2,300.0	2,263.2	2,198.6	2,150.7	7.5	8.6	121.33	-396.9	-11.7	503.1	489.9	13.12	38.352

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Godby 2-30
Project:	SEC.30-T7N-R65W	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Reference Site:	Godby 30-B Pad Sec.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site Error:	0.0ft	North Reference:	True
Reference Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (06-11-13)	Offset TVD Reference:	Offset Datum

Offset Design													Offset Site Error:	0.0 ft
Survey Program: 0-MWDD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
2,400.0	2,358.7	2,290.5	2,239.2	8.1	9.2	122.41	-421.9	-12.6	541.3	527.4	13.99	38.702		
2,500.0	2,454.3	2,382.4	2,327.6	8.7	9.7	123.34	-446.8	-13.4	579.8	564.9	14.86	39.012		
2,600.0	2,549.9	2,474.4	2,416.1	9.3	10.2	124.16	-471.8	-14.2	618.3	602.6	15.74	39.288		
2,700.0	2,645.4	2,566.3	2,504.6	9.9	10.7	124.88	-496.7	-15.1	657.0	640.4	16.62	39.537		
2,800.0	2,741.0	2,658.2	2,593.1	10.5	11.2	125.53	-521.7	-15.9	695.7	678.2	17.50	39.761		
2,900.0	2,836.6	2,750.2	2,681.5	11.1	11.7	126.10	-546.6	-16.7	734.5	716.1	18.38	39.965		
3,000.0	2,932.1	2,842.1	2,770.0	11.7	12.3	126.62	-571.6	-17.6	773.4	754.1	19.26	40.151		
3,100.0	3,027.7	2,934.0	2,858.5	12.3	12.8	127.09	-596.6	-18.4	812.3	792.1	20.14	40.322		
3,200.0	3,123.3	3,025.9	2,946.9	13.0	13.3	127.52	-621.5	-19.3	851.2	830.2	21.03	40.478		
3,300.0	3,218.8	3,117.9	3,035.4	13.6	13.8	127.90	-646.5	-20.1	890.2	868.3	21.91	40.623		
3,400.0	3,314.4	3,209.8	3,123.9	14.2	14.3	128.26	-671.4	-20.9	929.2	906.4	22.80	40.756		
3,500.0	3,409.9	3,301.7	3,212.4	14.8	14.8	128.59	-696.4	-21.8	968.2	944.6	23.68	40.880		
3,600.0	3,505.5	3,393.7	3,300.8	15.4	15.4	128.89	-721.3	-22.6	1,007.3	982.7	24.57	40.995		
3,700.0	3,601.1	3,485.6	3,389.3	16.1	15.9	129.17	-746.3	-23.4	1,046.4	1,020.9	25.46	41.103		
3,800.0	3,696.6	3,577.5	3,477.8	16.7	16.4	129.43	-771.3	-24.3	1,085.5	1,059.2	26.34	41.203		
3,900.0	3,792.2	3,669.4	3,566.2	17.3	16.9	129.67	-796.2	-25.1	1,124.6	1,097.4	27.23	41.297		
4,000.0	3,887.8	3,761.4	3,654.7	17.9	17.4	129.90	-821.2	-26.0	1,163.8	1,135.6	28.12	41.385		
4,100.0	3,983.3	3,853.3	3,743.2	18.5	18.0	130.11	-846.1	-26.8	1,202.9	1,173.9	29.01	41.468		
4,200.0	4,078.9	3,945.2	3,831.7	19.2	18.5	130.31	-871.1	-27.6	1,242.1	1,212.2	29.90	41.546		
4,300.0	4,174.4	4,037.2	3,920.1	19.8	19.0	130.49	-896.0	-28.5	1,281.3	1,250.5	30.78	41.620		
4,400.0	4,270.0	4,129.1	4,008.6	20.4	19.5	130.67	-921.0	-29.3	1,320.4	1,288.8	31.67	41.689		
4,500.0	4,365.6	4,221.0	4,097.1	21.0	20.0	130.83	-945.9	-30.1	1,359.6	1,327.1	32.56	41.755		
4,600.0	4,461.1	4,312.9	4,185.6	21.7	20.6	130.99	-970.9	-31.0	1,398.9	1,365.4	33.45	41.818		
4,700.0	4,556.7	4,404.9	4,274.0	22.3	21.1	131.13	-995.9	-31.8	1,438.1	1,403.7	34.34	41.877		
4,800.0	4,652.3	4,496.8	4,362.5	22.9	21.6	131.27	-1,020.8	-32.7	1,477.3	1,442.1	35.23	41.933		
4,900.0	4,747.8	4,588.7	4,451.0	23.6	22.1	131.40	-1,045.8	-33.5	1,516.5	1,480.4	36.12	41.986		
5,000.0	4,843.4	4,680.7	4,539.4	24.2	22.6	131.53	-1,070.7	-34.3	1,555.8	1,518.8	37.01	42.037		
5,100.0	4,939.0	4,772.6	4,627.9	24.8	23.2	131.65	-1,095.7	-35.2	1,595.0	1,557.1	37.90	42.085		
5,118.0	4,956.1	4,789.1	4,643.8	24.9	23.2	131.67	-1,100.2	-35.3	1,602.1	1,564.0	38.06	42.094		
5,200.0	5,034.8	4,864.8	4,716.7	25.4	23.7	132.23	-1,120.7	-36.0	1,633.5	1,594.7	38.86	42.038		
5,300.0	5,131.7	4,958.0	4,806.3	25.8	24.2	132.79	-1,146.0	-36.9	1,669.9	1,630.2	39.74	42.024		
5,400.0	5,229.3	5,051.9	4,896.7	26.1	24.7	133.22	-1,171.5	-37.7	1,704.1	1,663.5	40.57	41.999		
5,500.0	5,327.6	5,146.5	4,987.8	26.5	25.3	133.51	-1,197.2	-38.6	1,736.0	1,694.7	41.37	41.967		
5,600.0	5,426.5	5,289.8	5,126.2	26.7	25.9	133.58	-1,234.1	-39.8	1,764.9	1,722.7	42.19	41.831		
5,700.0	5,525.9	5,466.3	5,299.0	27.0	26.4	133.56	-1,270.3	-41.0	1,787.5	1,744.5	42.94	41.624		
5,800.0	5,625.6	5,647.5	5,478.2	27.2	26.9	133.55	-1,296.3	-41.9	1,803.3	1,759.7	43.57	41.390		
5,900.0	5,725.5	5,831.7	5,661.8	27.3	27.2	133.54	-1,311.1	-42.4	1,812.1	1,768.1	44.05	41.139		
5,974.6	5,800.0	5,970.0	5,800.0	27.4	27.4	-134.84	-1,314.5	-42.5	1,814.1	1,769.8	44.32	40.930		
6,000.0	5,825.4	5,995.4	5,825.4	27.4	27.4	-134.84	-1,314.5	-42.5	1,814.1	1,769.7	44.38	40.877		
6,100.0	5,925.4	6,095.4	5,925.4	27.5	27.5	-134.84	-1,314.5	-42.5	1,814.1	1,769.5	44.60	40.676		
6,200.0	6,025.4	6,195.4	6,025.4	27.6	27.6	-134.84	-1,314.5	-42.5	1,814.1	1,769.3	44.82	40.474		
6,300.0	6,125.4	6,295.4	6,125.4	27.7	27.6	-134.84	-1,314.5	-42.5	1,814.1	1,769.1	45.05	40.271		
6,400.0	6,225.4	6,395.4	6,225.4	27.8	27.7	-134.84	-1,314.5	-42.5	1,814.1	1,768.8	45.28	40.067		
6,500.0	6,325.4	6,495.4	6,325.4	27.9	27.8	-134.84	-1,314.5	-42.5	1,814.1	1,768.6	45.51	39.863		
6,600.0	6,425.4	6,595.4	6,425.4	28.0	27.9	-134.84	-1,314.5	-42.5	1,814.1	1,768.4	45.74	39.657		
6,700.0	6,525.4	6,695.4	6,525.4	28.1	28.0	-134.84	-1,314.5	-42.5	1,814.1	1,768.1	45.98	39.451		
6,800.0	6,625.4	6,795.4	6,625.4	28.2	28.1	-134.84	-1,314.5	-42.5	1,814.1	1,767.9	46.23	39.245		
6,900.0	6,725.4	6,895.4	6,725.4	28.4	28.2	-134.84	-1,314.5	-42.5	1,814.1	1,767.7	46.47	39.038		
7,000.0	6,825.4	6,995.4	6,825.4	28.5	28.3	-134.84	-1,314.5	-42.5	1,814.1	1,767.4	46.72	38.831		
7,100.0	6,925.4	7,095.4	6,925.4	28.6	28.4	-134.84	-1,314.5	-42.5	1,814.1	1,767.2	46.97	38.623		
7,200.0	7,025.4	7,195.4	7,025.4	28.7	28.5	-134.84	-1,314.5	-42.5	1,814.1	1,766.9	47.22	38.415		
7,300.0	7,125.4	7,295.4	7,125.4	28.8	28.6	-134.84	-1,314.5	-42.5	1,814.1	1,766.6	47.48	38.207		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Godby 2-30
Project:	SEC.30-T7N-R65W	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Reference Site:	Godby 30-B Pad Sec.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site Error:	0.0ft	North Reference:	True
Reference Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (06-11-13)	Offset TVD Reference:	Offset Datum

Offset Design Godby 30-B Pad Sec.30-T7N-R65W - Godby 6-30 - Wellbore #1 - Plan #1 (06-11-13)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference	Offset	Semi Major Axis			Distance								Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	
7,400.0	7,225.4	7,395.4	7,225.4	28.9	28.7	-134.84	-1,314.5	-42.5	1,814.1	1,766.4	47.74	37.999	
7,500.0	7,325.4	7,495.4	7,325.4	29.1	28.7	-134.84	-1,314.5	-42.5	1,814.1	1,766.1	48.00	37.791	
7,600.0	7,425.4	7,595.4	7,425.4	29.2	28.9	-134.84	-1,314.5	-42.5	1,814.1	1,765.9	48.27	37.584	
7,639.6	7,465.0	7,635.0	7,465.0	29.2	28.9	-134.84	-1,314.5	-42.5	1,814.1	1,765.7	48.37	37.502	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Godby 2-30
Project:	SEC.30-T7N-R65W	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Reference Site:	Godby 30-B Pad Sec.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site Error:	0.0ft	North Reference:	True
Reference Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (06-11-13)	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 4881.0ft (RKB-16')
Offset Depths are relative to Offset Datum
Central Meridian is -105.500000 °

Coordinates are relative to: Godby 2-30
Coordinate System is US State Plane 1983, Colorado Northern Zone
Grid Convergence at Surface is: 0.51°



Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Godby 2-30
Project:	SEC.30-T7N-R65W	TVD Reference:	WELL @ 4881.0ft (RKB-16')
Reference Site:	Godby 30-B Pad Sec.30-T7N-R65W	MD Reference:	WELL @ 4881.0ft (RKB-16')
Site Error:	0.0ft	North Reference:	True
Reference Well:	Godby 2-30	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (06-11-13)	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 4881.0ft (RKB-16')
Offset Depths are relative to Offset Datum
Central Meridian is -105.500000 °

Coordinates are relative to: Godby 2-30
Coordinate System is US State Plane 1983, Colorado Northern Zone
Grid Convergence at Surface is: 0.51°

