

Form 3160-5 (August 2007)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well: Oil Well / Gas Well / Other
2. Name of Operator: CHESAPEAKE OPERATING, INC.
3a. Address: P.O. BOX 18496 OKLAHOMA CITY, OK 73154-0496
3b. Phone No. (include area code): (405) 935-4275
4. Location of Well (Footage, Sec., T., R., M., or Survey Description): SEC 19 T19N R27E 1980' FSL & 1980' FEL
5. Lease Serial No.: NMNM 0560353
6. If Indian, Allottee or Tribe Name:
7. If Unit or CA/Agreement, Name and/or No.:
8. Well Name and No.: FEDERAL 19-27 #1H
9. API Well No.: 30-015-37988-00-X1
10. Field and Pool, or Exploratory Area: WILDCAT; BONE SPRING
11. County or Parish, State: EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION / TYPE OF ACTION

Notice of Intent	Acidize	Deepen	Production (Start/Resume)	Water Shut-Off
Subsequent Report	Alter Casing	Fracture Treat	Reclamation	Well Integrity
Final Abandonment Notice	Casing Repair	New Construction	Recomplete	Other
	Change Plans	Plug and Abandon	Temporarily Abandon	
	Convert to Injection	Plug Back	Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directly or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Chesapeake

THIS WILL TIE YOUR'S TOGETHER
PLEASE CALL THIS ONE UP AS WELL
THANKS
PLEASE TELL FOR LARGE MARKERS ON PDF'S

Depth	Type	Description	Amt.	Yield	Ft Fill
13 3/8 @ 1,000	Surface	Primary	1,000	1.34	1,000
9 5/8 @ 4,000	Intermediate	Lead: Interval Mix: Premium Plus Cement	1,000	1.34	1,000
5 1/2 @ 14,000	Production	Lead: Tail Mix: Premium Plus Cement, Premium Plus H	1,000	1.34	10,000
		Primary	1,000	1.34	2,000
		Lead: Tail Mix:	1,000	1.34	2,000

Cement Plug - 13,000 - 13,200 - 50 sx - Premium Plus H
Cement Plug - 11,000 - 11,200 - 50 sx - Premium Plus H
Cement Plug - 9,000 - 9,200 - 50 sx - Premium Plus H
Cement Plug - 7,000 - 7,200 - 50 sx - Premium Plus H
Cement Plug - 5,000 - 5,200 - 50 sx - Premium Plus H
Cement Plug - 3,000 - 3,200 - 50 sx - Premium Plus H
Cement Plug - 1,000 - 1,200 - 50 sx - Premium Plus H
Cement Plug - 0 - 200 - 50 sx - Premium Plus H

Surface Hole Size: 17 1/2 in @ 1,000 ft
Intermediate Hole Size: 12 1/4 in @ 4,000 ft
Production Hole Size: 8 3/4 in @ 14,000 ft
Mud Weight: 8.4 - 10.0 ppg
Mud Type: Fresh Water / Brine / Cut Brine

Surface: 13 3/8 in @ 1,000 ft - 17 1/2 in - Cemented to surface
Intermediate: 9 5/8 in @ 4,000 ft - 12 1/4 in - Cemented to surface
Production: 5 1/2 in @ 14,000 ft - 8 3/4 in - Cemented to 10,000 ft

Name	MD	TVD	Formation
Rustler	1,000	1,000	Rustler
Salado	1,200	1,200	Salado
Base of Salt	4,000	4,000	Base of Salt
Lamar	4,200	4,200	Lamar
Bell Canyon	4,250	4,250	Bell Canyon
Cherry Canyon	5,200	5,200	Cherry Canyon
Brushy Canyon	6,800	6,800	Brushy Canyon
Bone Spring Lime	8,500	8,500	Bone Spring Lime
1st Bone Spring Sand	9,200	9,200	1st Bone Spring Sand
2nd Bone Spring Sand	9,800	9,800	2nd Bone Spring Sand
3rd Bone Spring Sand	10,500	10,500	3rd Bone Spring Sand
Wolfcamp	11,000	11,000	Wolfcamp
Penn	12,000	12,000	Penn
Strawn	13,000	13,000	Strawn
Atoka	13,200	13,200	Atoka
Morrow	13,500	13,500	Morrow
Base of Morrow Clastics	13,800	13,800	Base of Morrow Clastics
Mississippian Limestone	14,000	14,000	Mississippian Limestone

Logging Program: Mud Log - TD to 4,000 ft
Logging Program: GR/CNL - TD to 4,000 ft
Logging Program: GR/CNL - TD to surface
Logging Program: CBL - TD to surface
Logging Program: DST - None
Logging Program: Coring - None

Name	MD	TVD	Formation
Rustler	1,000	1,000	Rustler
Salado	1,200	1,200	Salado
Base of Salt	4,000	4,000	Base of Salt
Lamar	4,200	4,200	Lamar
Bell Canyon	4,250	4,250	Bell Canyon
Cherry Canyon	5,200	5,200	Cherry Canyon
Brushy Canyon	6,800	6,800	Brushy Canyon
Bone Spring Lime	8,500	8,500	Bone Spring Lime
1st Bone Spring Sand	9,200	9,200	1st Bone Spring Sand
2nd Bone Spring Sand	9,800	9,800	2nd Bone Spring Sand
3rd Bone Spring Sand	10,500	10,500	3rd Bone Spring Sand
Wolfcamp	11,000	11,000	Wolfcamp
Penn	12,000	12,000	Penn
Strawn	13,000	13,000	Strawn
Atoka	13,200	13,200	Atoka
Morrow	13,500	13,500	Morrow
Base of Morrow Clastics	13,800	13,800	Base of Morrow Clastics
Mississippian Limestone	14,000	14,000	Mississippian Limestone

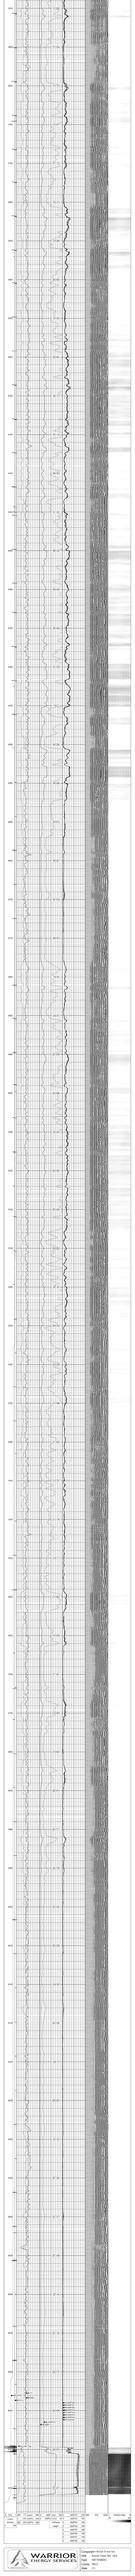
Geographic Inc Eco 8 well 1st
Eco 8 well 1st Bone Spring Sand
API: 4300000000
County: Eddy
State: NM
Country: USA
WARRIOR
ENERGY SERVICES