

NOBLE ENERGY INC.
 CORLISS 21-33
 NENW 33-5N-63W
 544' FNL & 1780' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 8/7/2013

API: 05-123-21003
 COGCC #


GL Elev: 4564
 KB Elev: 4576

Spud Date:

Surface Casing :
 8 5/8" 24# J-55 @ 423'
 Cement: 345 sx
 TOC: Surface

TOC @ 5520'

Production Casing :
 4 1/2" 11.60# N-80 @ 7347'
 Cement: 275 sx
 TD: 11/5/2003

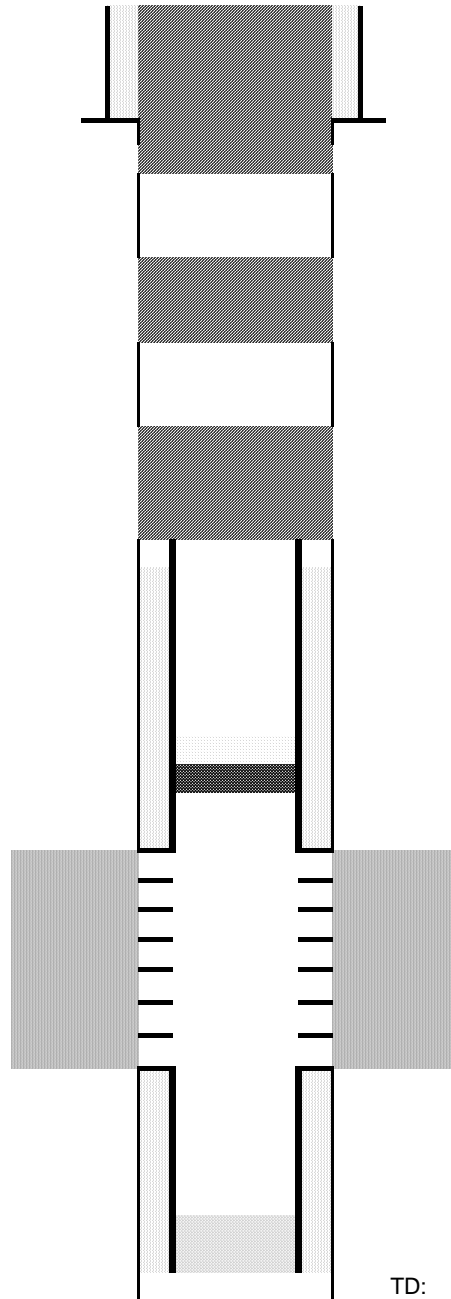

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 530'
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Cut and pull csg ~5000'
 100 sx Stub Plug

CIBP @ 7140' w/ 2 sx cement on top

Dakota Perforations 7240' - 7274'

TD: 7348