
Schlumberger
Platform Express
Three Detector Lithology Density
Compensated Neutron
Array Induction Imager Tool
Gamma Ray
Caliper
Bit Size
Density Correction
Neutron Porosity
Photoelectric Factor
Deep Resistivity
Medium Resistivity
Shallow Resistivity
Spherically Focused Resistivity
Rt
Rxo
Rm
Rmf
Rmc
Mud Type
Mud Density
Mud Resistivity
Mud Filtrate Resistivity
Mud Cake Resistivity
Source of Sample
Rm @ BHT
Rmf @ BHT
Rmc @ BHT
Time Since Circulation
Max Recorded Temperature
Equipment Number
Location
Recorded By
Witnessed By
Run Number
Depth Driller
Depth Logger
Bottom Logged Interval
Top Log Interval
Casing Driller
Casing Logger
Bit Size
Type Fluid in Hole
Density
Viscosity
pH
Fluid Loss
Source of Sample
Rm @ Meas. Temp
Rmf @ Meas. Temp
Rmc @ Meas. Temp
Rm @ BHT
Rmf @ BHT
Rmc @ BHT

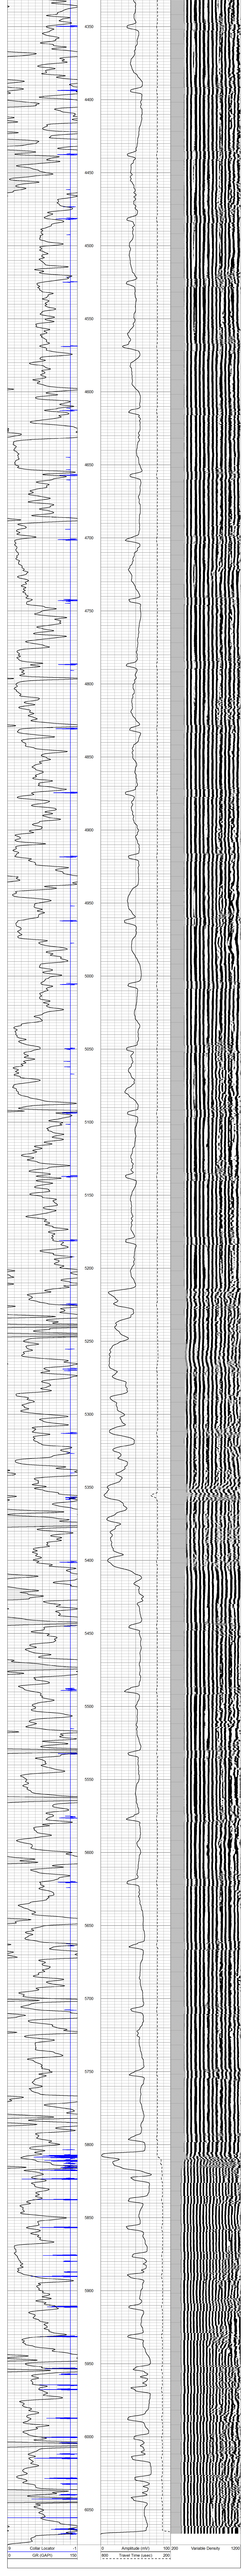
4350
4400
4450
4500
4550
4600
4650
4700
4750
4800
4850
4900
4950
5000
5050
5100
5150
5200
5250
5300
5350
5400
5450
5500
5550
5600
5650
5700
5750
5800
5850
5900
5950
6000
6050
Collar Locator
GR (GAPI)
Amplitude (mV)
Travel Time (usec)
Variable Density