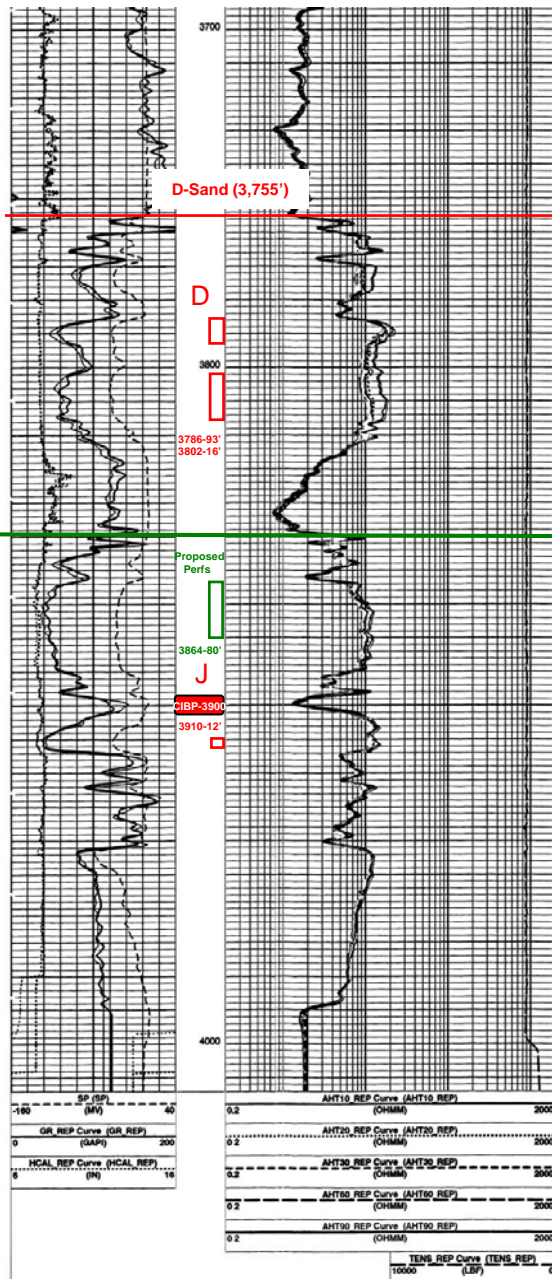


# UIC Form 31: Checklist item #5B

## Cannon Field Cross Section

[illegible]

D-Sand	Top Perf	Bot. Perf
SS: 452'	SS: 421'	SS: 391'



Cannon 3-24



FILE NO. \_\_\_\_\_

Company \_\_\_\_\_

Well \_\_\_\_\_

Field \_\_\_\_\_

County \_\_\_\_\_

Location \_\_\_\_\_

State \_\_\_\_\_

DATE \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

DUAL INDUCTION  
FOCUSED LOG

SUNDANCE OIL COMPANY

CANNON NO. 3-24

TOP \_\_\_\_\_

WASHINGTON

CL: 4, 186'

MAY 29 1964

COAST GUARD, CORP.

OTHER SERVICES \_\_\_\_\_

COL. GP \_\_\_\_\_

PROD. CO. \_\_\_\_\_

TIGHT HOLE

PERMANENT DATUM \_\_\_\_\_

ORIGINAL LEVEL \_\_\_\_\_

REV. \_\_\_\_\_

DATE \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

NO. \_\_\_\_\_

DATE \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

DEPTH \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

NO. \_\_\_\_\_

DATE \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

DEPTH \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

NO. \_\_\_\_\_

DATE \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

DEPTH \_\_\_\_\_

TIME \_\_\_\_\_

BY \_\_\_\_\_

REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

NO. \_\_\_\_\_

DATE \_\_\_\_\_

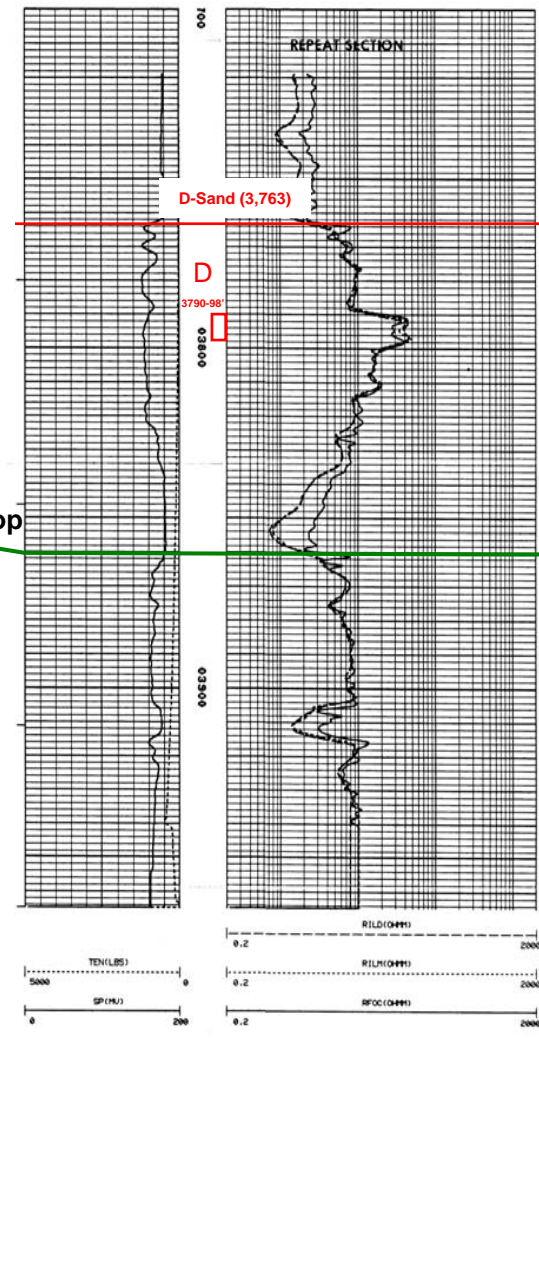
TIME \_\_\_\_\_

BY \_\_\_\_\_

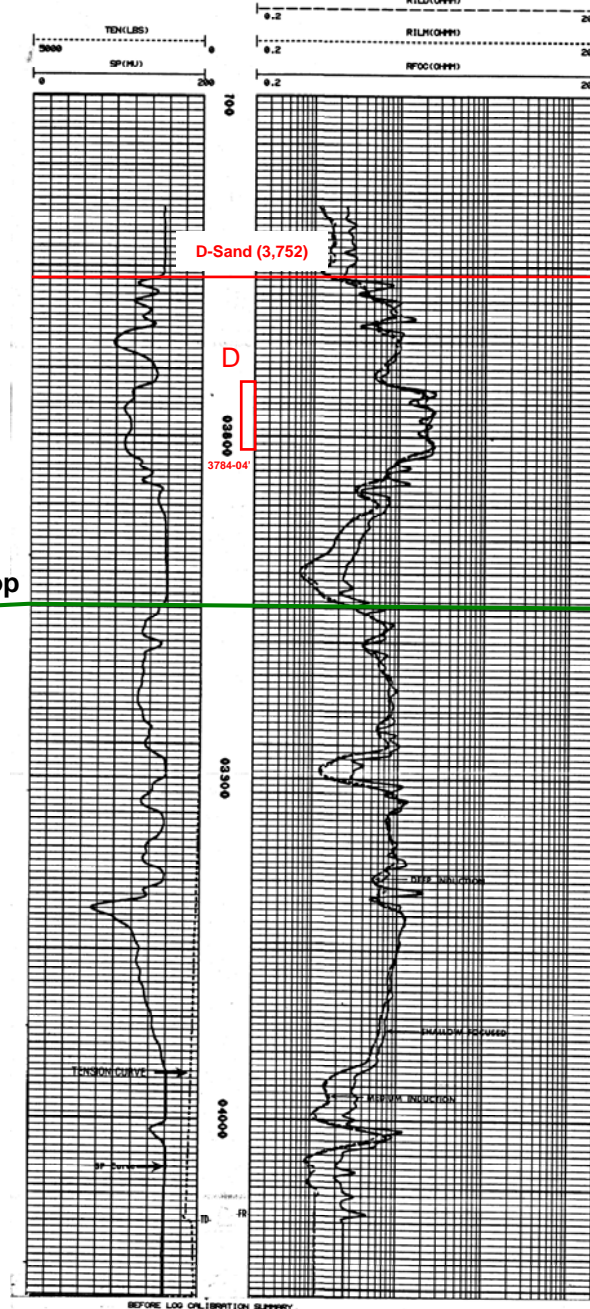
REVIEWED BY \_\_\_\_\_

REVISIONS \_\_\_\_\_

D-Sand	Top Perf	Bot. Perf
SS: 433'	SS: 406'	SS: 398'

[illegible]

D-Sand	Top Perf	Bot. Perf
SS: 448'	SS: 416'	SS: 396'

[illegible]

D-Sand	Top Perf	Bot. Perf
SS: 423'	SS: 386'	SS: 383'

