

NOBLE ENERGY INC.
BICKLING E21-15
SWSE 21-6N-65W
641' FSL & 1982' FEL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
10/9/2013

API: 05-123-18711
COGCC #

GL Elev: 4707
KB Elev: 4720


Spud Date: 11/23/1994

Surface Casing : Cmt: 466' to Surface
8 5/8" 24# @ 371' (165 sx)
Cement: 265 sx
TOC: Surface

Cmt: 2854'-4010'

TOC @ 6150'

Production Casing :
4 1/2" 11.60# J-55 @ 7258'
Cement: 435 sx
TD: 11/27/1994

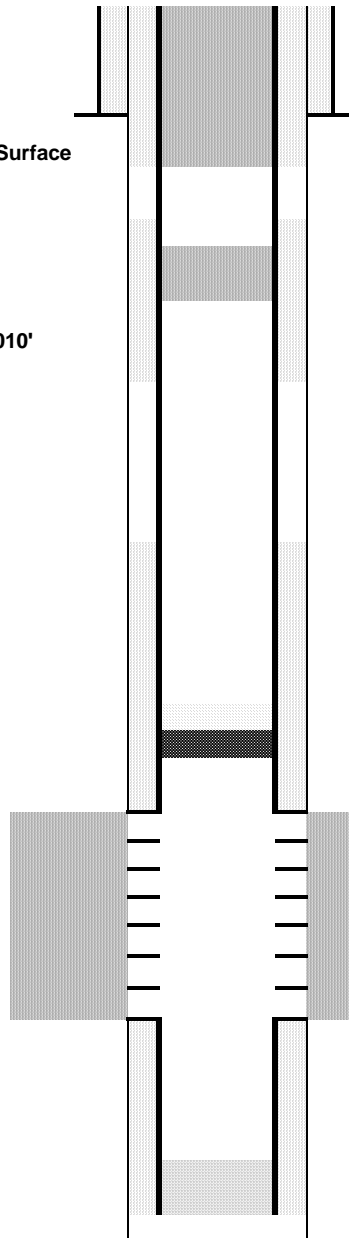

Cut surface casing off 6'-8' below surface.

Pump approx 50 sx shoe plug @ 470'
Will bring cement to surface.

Parkman Perfs 3628' - 3631' (150 sx squeeze)

20 sx plug 3750'-3550'

CIBP @ 6722' w/ 2 sx cement on top

Niobrara Perfs 6772' - 6904'

Codell Perfs 7075' - 7089'

TD: 7261