

Bonanza Creek Energy
North Platte E-A-28HC

SHL: 802' FSL & 569' FWL
SWSW Sec 28 T5N R63W
BHL: 470' FNL & 10' FWL
Sec 28 T5N R63W
Weld County CO
05-123-36025

KB Elev 4567' ft
GL Elev 4551' ft
KB to GL 16' ft

Updated Date
8/14/2013

Spud Date: 7/27/2013

9-5/8" 36# J-55 SURF
CSG @ 4.81"
(13-1/2" HOLE)

481 ft

TOC: ft

KOP: 5820 ft

TOL: 6766 ft @ 70°

TVD: 6503 ft

Tubing String (Top Down)					
Item #	KB to GL	Component Description	Min ID	Length	Bottom MD
1		Tubing, 2-7/8" 6.5# EUE IRD		0.00 ft	
2		Sealing Nipple, 2-7/8"			
3		Collar, 2-7/8"			
4		Gas Anchor, 2-7/8" OD			
5		Tubing, 2-7/8" 6.5# EUE IRD			
6					
7					
8					
9					
Total Length (KB to Tubing Tail)					0.00 ft

Rod Pump & Rod String (Top Down)					
Item #	Component Description	Rod Guides Used	Unit Ran	Length	Make
1	Polish Rod, 1-1/4" x 22'				
2	Pony Rod, 3/4" x 2'				
3	Pony Rod, 3/4" x 6'				
4	Sucker Rods, 3/4" x 25'				
5	X-Bars, 4" x 35'				
6	Pin, 1/2" DIA X 22'				
7	Strainer Nipples, 1-1/2" x 22'				
8					
9					
Total Length Of Rod String (Top of Polish Rod to Top of Pump)					0.00 ft

161 lbs of 4.12" 11.6# P-110, 10' 6" 4" 2" pups w/ HES seal/pipe @ 5385 KB w/ 45K of compression

Free Stages 1-18 7/27/2012 - 7/27/2012 w/ 7/27/2012 7/27/2012 lbs 4070 Ottawa, 7/27/2012 lbs 3050 Ottawa, 7/27/2012 lbs 2040 SR Escal.

7/27/2012 7' 26# H-80 & 20# J-55 LTC CSG @ 8.75' HOLE


7/27/2012 600 lbs Toned Spacer 11-55M, 235 lbs EXTEND CEM (yd 2.06, 10.5 ppg and 195 lbs Expansa Cem (yd 1.46, 14.6 ppg)

Baker Hughes Liner & Sleeves w/ 4.5", 11.6# P-110

Sleeves #1 through #18 drilled out 7/27/2012

7" 26# P-110
6995' ft

Sleeve Tops

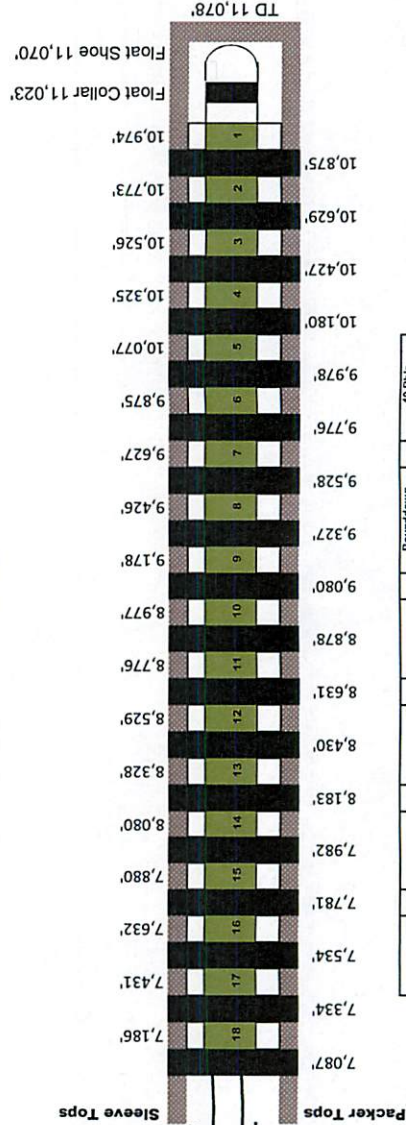

Stage	Sleeve Top (ft)	Ball Size	Rounddown (Bbls)	Flash Flowdown (Bbls)
1	7,087			
2	7,186			
3	7,334			
4	7,341			
5	7,534			
6	7,781			
7	7,880			
8	8,080			
9	8,328			
10	8,529			
11	8,776			
12	8,977			
13	9,178			
14	9,426			
15	9,627			
16	9,875			
17	10,077			
18	10,325			
19	10,526			
20	10,773			
21	10,974			