


TEKTON WINDSOR, LLC

Location	Windsor, CO, USA(Imported)	Slot	Slot #10
Field	Windsor Project	Well	DVE #10
Installation	Diamond Valley East	Wellbore	DVE #10 (PWB)



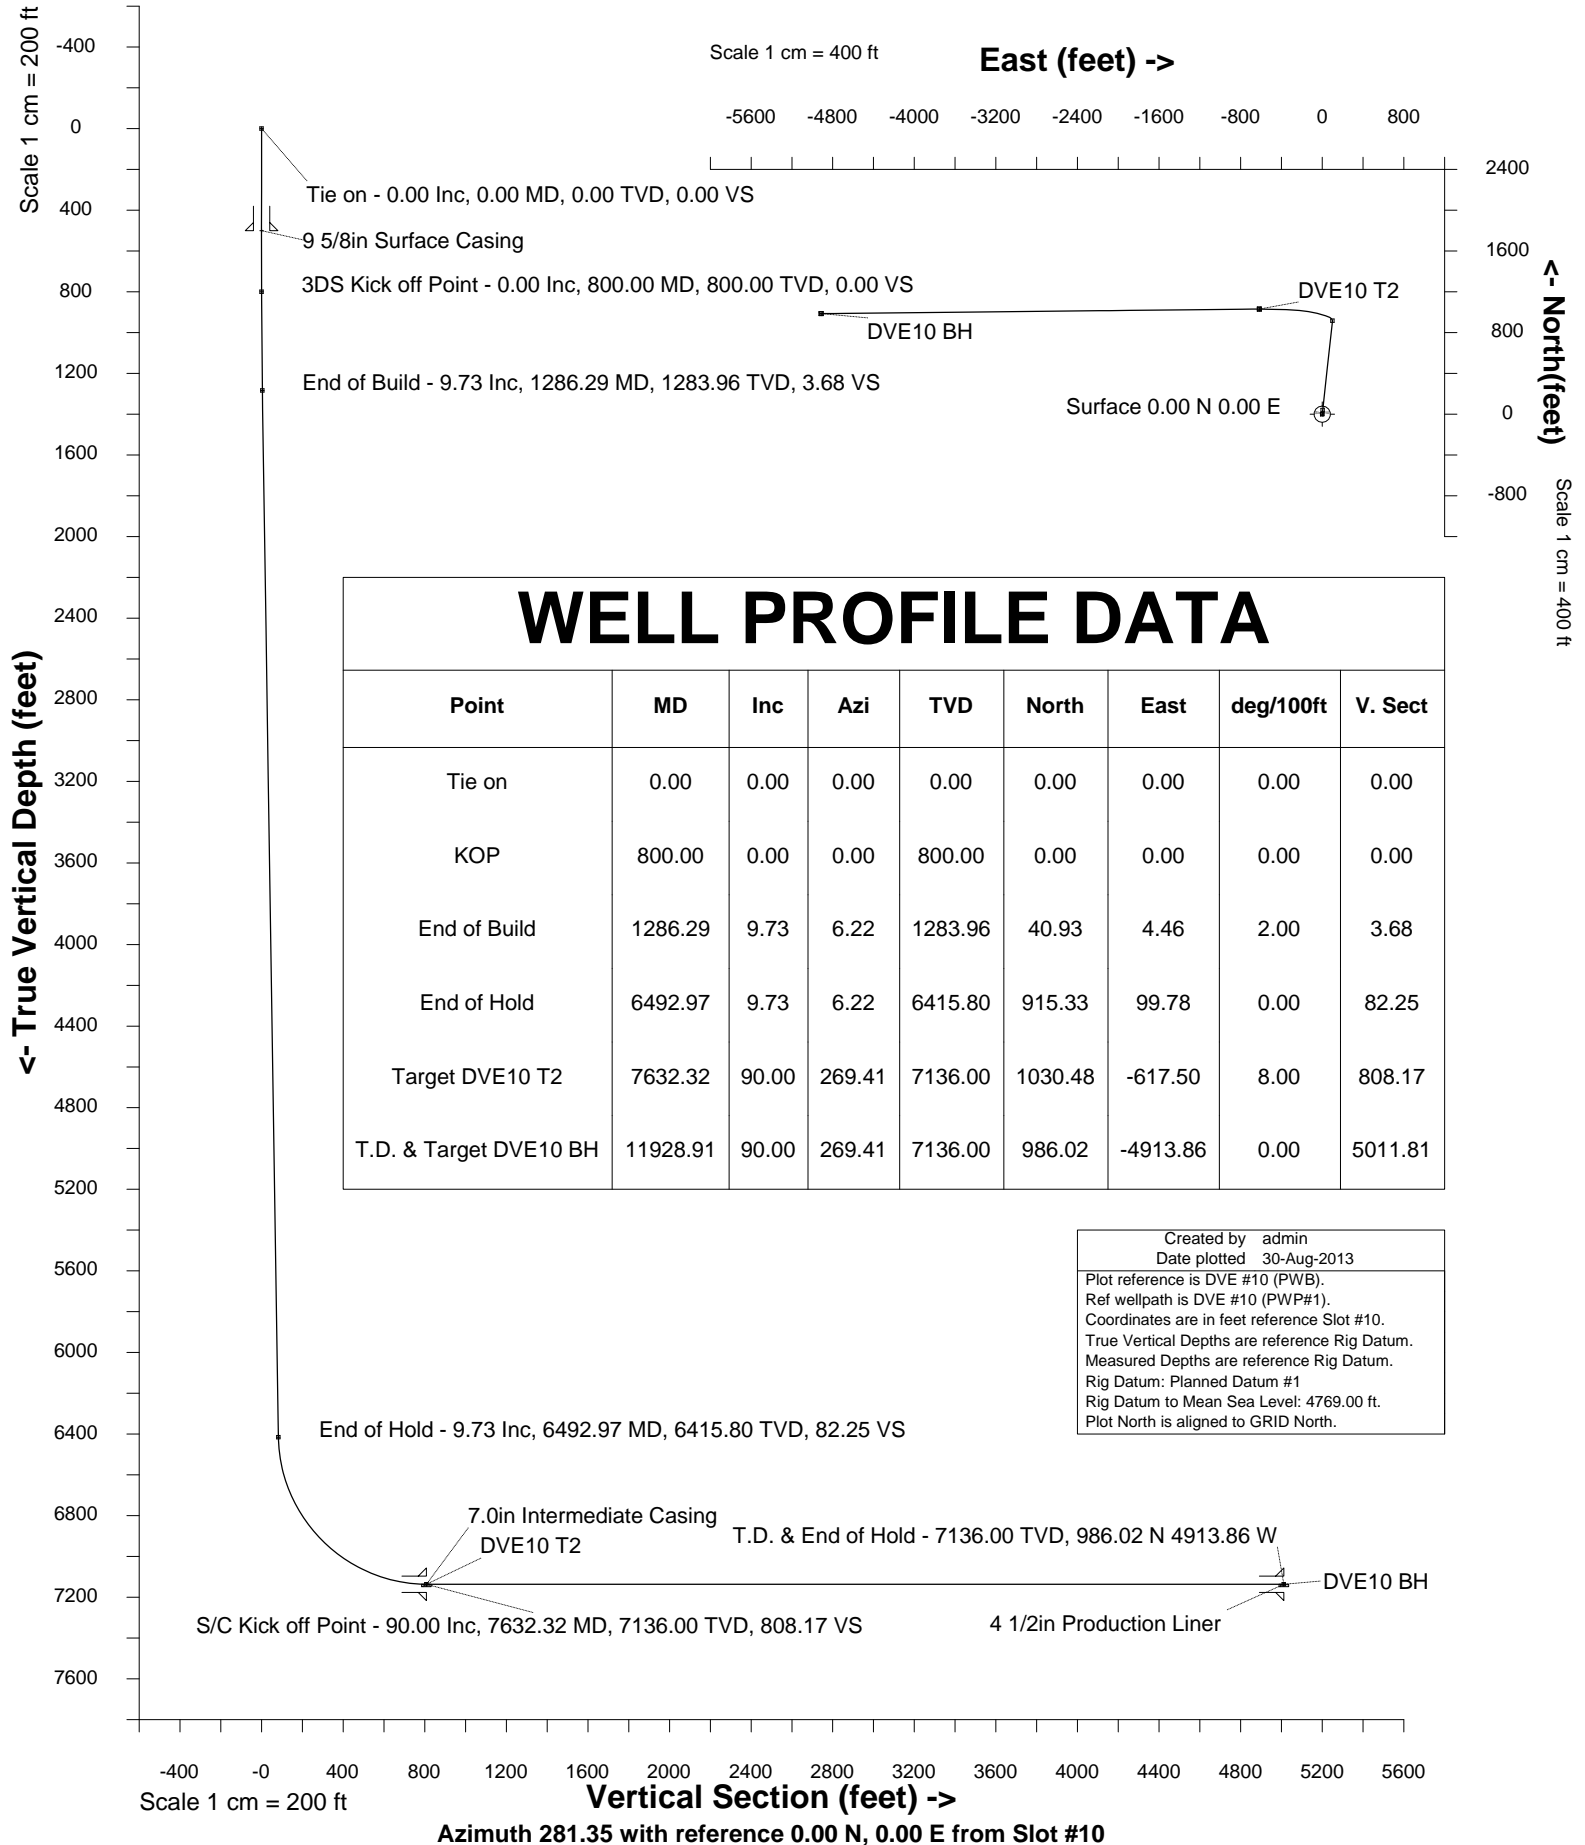

INTEGRATED PETROLEUM TECHNOLOGIES, INC
SYSDRILL
Well Design Combined Report
Wellbore: DVE #10 (PWB)

Wellhead Details							
Name	Northing	Easting	Latitude	Longitude	North	East	Elevation Above Inst.
Slot #10	1413881.0000	3175339.0000	40.46779462	-104.86980442	144.01N	0.00E	-0.00

Declination			
Date	Source	Time	
28-Aug-2013	IGRF Model [1900.0-2015.0]		15:21

Site Details				
Name	Northing	Easting	Coord System Name	North Alignment
Diamond Valley East	1413737.0000	3175339.0000	CO83-NF on NAD83 datum	Grid

Summary Wellpath									
MD[ft]	Inc[deg]	Azi[deg]	TVD[ft]	North[ft]	East[ft]	Dogleg [deg/100ft]	Vertical Section[ft]	Northing	Easting
0.00	0.00	0.000	0.00	0.00N	0.00E		0.00	1413881.00	3175339.00
800.00	0.00	0.000	800.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
1286.29	9.73	6.220	1283.96	40.93N	4.46E	2.00	3.68	1413921.93	3175343.46
6492.97	9.73	6.220	6415.80	915.33N	99.78E	==>	82.25	1414796.30	3175438.78
7632.32	90.00	269.410	7136.00	1030.48N	617.50W	8.00	808.17	1414911.44	3174721.52
11928.91	90.00	269.410	7136.00	986.02N	4913.86W	==>	5011.81	1414866.99	3170425.33

Interpolated Wellpath									
MD[ft]	Inc[deg]	Azi[deg]	TVD[ft]	North[ft]	East[ft]	Dogleg [deg/100ft]	Vertical Section[ft]	Northing	Easting
0.00	0.00	0.000	0.00	0.00N	0.00E		0.00	1413881.00	3175339.00
100.00	0.00	0.000	100.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
200.00	0.00	0.000	200.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
300.00	0.00	0.000	300.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
400.00	0.00	0.000	400.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
500.00	0.00	0.000	500.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
600.00	0.00	0.000	600.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
700.00	0.00	0.000	700.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
800.00	0.00	0.000	800.00	0.00N	0.00E	==>	0.00	1413881.00	3175339.00
900.00	2.00	6.220	899.98	1.73N	0.19E	2.00	0.16	1413882.73	3175339.19
1000.00	4.00	6.220	999.84	6.94N	0.76E	2.00	0.62	1413887.94	3175339.76
1100.00	6.00	6.220	1099.45	15.60N	1.70E	2.00	1.40	1413896.60	3175340.70
1200.00	8.00	6.220	1198.70	27.72N	3.02E	2.00	2.49	1413908.71	3175342.02
1286.29	9.73	6.220	1283.96	40.93N	4.46E	2.00	3.68	1413921.93	3175343.46
1300.00	9.73	6.220	1297.47	43.23N	4.71E	==>	3.88	1413924.23	3175343.71
1400.00	9.73	6.220	1396.03	60.03N	6.54E	==>	5.39	1413941.03	3175345.54
1500.00	9.73	6.220	1494.60	76.82N	8.37E	==>	6.90	1413957.82	3175347.37
1600.00	9.73	6.220	1593.16	93.62N	10.21E	==>	8.41	1413974.61	3175349.20
1700.00	9.73	6.220	1691.72	110.41N	12.04E	==>	9.92	1413991.41	3175351.04
1800.00	9.73	6.220	1790.28	127.20N	13.87E	==>	11.43	1414008.20	3175352.87
1900.00	9.73	6.220	1888.85	144.00N	15.70E	==>	12.94	1414024.99	3175354.70
2000.00	9.73	6.220	1987.41	160.79N	17.53E	==>	14.45	1414041.78	3175356.53
2100.00	9.73	6.220	2085.97	177.58N	19.36E	==>	15.96	1414058.58	3175358.36
2200.00	9.73	6.220	2184.54	194.38N	21.19E	==>	17.47	1414075.37	3175360.19
2300.00	9.73	6.220	2283.10	211.17N	23.02E	==>	18.98	1414092.16	3175362.02
2400.00	9.73	6.220	2381.66	227.97N	24.85E	==>	20.48	1414108.96	3175363.85
2500.00	9.73	6.220	2480.22	244.76N	26.68E	==>	21.99	1414125.75	3175365.68
2600.00	9.73	6.220	2578.79	261.55N	28.51E	==>	23.50	1414142.54	3175367.51
2700.00	9.73	6.220	2677.35	278.35N	30.34E	==>	25.01	1414159.34	3175369.34
2800.00	9.73	6.220	2775.91	295.14N	32.17E	==>	26.52	1414176.13	3175371.17
2900.00	9.73	6.220	2874.48	311.93N	34.00E	==>	28.03	1414192.92	3175373.00
3000.00	9.73	6.220	2973.04	328.73N	35.84E	==>	29.54	1414209.72	3175374.83
3100.00	9.73	6.220	3071.60	345.52N	37.67E	==>	31.05	1414226.51	3175376.66
3200.00	9.73	6.220	3170.16	362.32N	39.50E	==>	32.56	1414243.30	3175378.50
3300.00	9.73	6.220	3268.73	379.11N	41.33E	==>	34.07	1414260.10	3175380.33
3400.00	9.73	6.220	3367.29	395.90N	43.16E	==>	35.58	1414276.89	3175382.16
3500.00	9.73	6.220	3465.85	412.70N	44.99E	==>	37.08	1414293.68	3175383.99
3600.00	9.73	6.220	3564.41	429.49N	46.82E	==>	38.59	1414310.48	3175385.82
3700.00	9.73	6.220	3662.98	446.29N	48.65E	==>	40.10	1414327.27	3175387.65

All data is in Feet unless otherwise stated
Coordinates are from Slot MD's are from Rig and TVD's are from Rig (Planned Datum #1 4769.0ft above Mean Sea Level)
Vertical Section is from 0.00N 0.00E on azimuth 281.350 degrees
Bottom hole distance is 5011.81 Feet on azimuth 281.35 degrees from Wellhead
Calculation method uses Minimum Curvature method
Prepared by Integrated Petroleum Technologies, Inc.
Date Printed: 30-Aug-2013



INTEGRATED PETROLEUM TECHNOLOGIES, INC
SYSDRILL
Well Design Combined Report
Wellbore: DVE #10 (PWB)

Interpolated Wellpath									
MD[ft]	Inc[deg]	Azi[deg]	TVD[ft]	North[ft]	East[ft]	Dogleg [deg/100ft]	Vertical Section[ft]	Northing	Easting
3800.00	9.73	6.220	3761.54	463.08N	50.48E	==>	41.61	1414344.06	3175389.48
3900.00	9.73	6.220	3860.10	479.87N	52.31E	==>	43.12	1414360.85	3175391.31
4000.00	9.73	6.220	3958.67	496.67N	54.14E	==>	44.63	1414377.65	3175393.14
4100.00	9.73	6.220	4057.23	513.46N	55.97E	==>	46.14	1414394.44	3175394.97
4200.00	9.73	6.220	4155.79	530.25N	57.80E	==>	47.65	1414411.23	3175396.80
4300.00	9.73	6.220	4254.35	547.05N	59.63E	==>	49.16	1414428.03	3175398.63
4400.00	9.73	6.220	4352.92	563.84N	61.47E	==>	50.67	1414444.82	3175400.46
4500.00	9.73	6.220	4451.48	580.64N	63.30E	==>	52.18	1414461.61	3175402.29
4600.00	9.73	6.220	4550.04	597.43N	65.13E	==>	53.68	1414478.41	3175404.12
4700.00	9.73	6.220	4648.60	614.22N	66.96E	==>	55.19	1414495.20	3175405.96
4800.00	9.73	6.220	4747.17	631.02N	68.79E	==>	56.70	1414511.99	3175407.79
4900.00	9.73	6.220	4845.73	647.81N	70.62E	==>	58.21	1414528.79	3175409.62
5000.00	9.73	6.220	4944.29	664.60N	72.45E	==>	59.72	1414545.58	3175411.45
5100.00	9.73	6.220	5042.86	681.40N	74.28E	==>	61.23	1414562.37	3175413.28
5200.00	9.73	6.220	5141.42	698.19N	76.11E	==>	62.74	1414579.17	3175415.11
5300.00	9.73	6.220	5239.98	714.99N	77.94E	==>	64.25	1414595.96	3175416.94
5400.00	9.73	6.220	5338.54	731.78N	79.77E	==>	65.76	1414612.75	3175418.77
5500.00	9.73	6.220	5437.11	748.57N	81.60E	==>	67.27	1414629.55	3175420.60
5600.00	9.73	6.220	5535.67	765.37N	83.43E	==>	68.77	1414646.34	3175422.43
5700.00	9.73	6.220	5634.23	782.16N	85.26E	==>	70.28	1414663.13	3175424.26
5800.00	9.73	6.220	5732.79	798.96N	87.10E	==>	71.79	1414679.92	3175426.09
5900.00	9.73	6.220	5831.36	815.75N	88.93E	==>	73.30	1414696.72	3175427.92
6000.00	9.73	6.220	5929.92	832.54N	90.76E	==>	74.81	1414713.51	3175429.75
6100.00	9.73	6.220	6028.48	849.34N	92.59E	==>	76.32	1414730.30	3175431.58
6200.00	9.73	6.220	6127.05	866.13N	94.42E	==>	77.83	1414747.10	3175433.41
6300.00	9.73	6.220	6225.61	882.92N	96.25E	==>	79.34	1414763.89	3175435.25
6400.00	9.73	6.220	6324.17	899.72N	98.08E	==>	80.85	1414780.68	3175437.08
6492.97	9.73	6.220	6415.80	915.33N	99.78E	==>	82.25	1414796.30	3175438.78
6500.00	9.68	2.900	6422.73	916.51N	99.88E	8.00	82.39	1414797.48	3175438.87
6600.00	12.15	321.610	6521.06	933.18N	93.75E	8.00	91.67	1414814.15	3175432.75
6700.00	18.13	300.730	6617.62	949.41N	73.81E	8.00	114.42	1414830.37	3175412.81
6800.00	25.22	290.590	6710.52	964.88N	40.44E	8.00	150.18	1414845.84	3175379.43
6900.00	32.72	284.770	6797.96	979.28N	5.72W	8.00	198.27	1414860.24	3175333.28
7000.00	40.39	280.950	6878.24	992.34N	63.76W	8.00	257.75	1414873.30	3175275.24
7100.00	48.16	278.170	6949.79	1003.81N	132.55W	8.00	327.45	1414884.77	3175206.45
7200.00	55.97	276.010	7011.22	1013.46N	210.76W	8.00	406.03	1414894.42	3175128.25
7300.00	63.82	274.210	7061.35	1021.09N	296.86W	8.00	491.95	1414902.06	3175042.15
7400.00	71.69	272.640	7099.18	1026.58N	389.18W	8.00	583.54	1414907.54	3174949.84
7500.00	79.57	271.200	7123.98	1029.80N	485.92W	8.00	679.02	1414910.76	3174853.10
7600.00	87.45	269.840	7135.28	1030.69N	585.19W	8.00	776.53	1414911.66	3174753.83
7632.32	90.00	269.410	7136.00	1030.48N	617.50W	8.00	808.17	1414911.44	3174721.52
7700.00	90.00	269.410	7136.00	1029.78N	685.17W	==>	874.38	1414910.74	3174653.85
7800.00	90.00	269.410	7136.00	1028.75N	785.17W	==>	972.22	1414909.71	3174553.86
7900.00	90.00	269.410	7136.00	1027.71N	885.16W	==>	1070.06	1414908.67	3174453.87
8000.00	90.00	269.410	7136.00	1026.68N	985.16W	==>	1167.89	1414907.64	3174353.88
8100.00	90.00	269.410	7136.00	1025.64N	1085.15W	==>	1265.73	1414906.60	3174253.89
8200.00	90.00	269.410	7136.00	1024.61N	1185.15W	==>	1363.57	1414905.57	3174153.90
8300.00	90.00	269.410	7136.00	1023.57N	1285.14W	==>	1461.40	1414904.53	3174053.91
8400.00	90.00	269.410	7136.00	1022.54N	1385.14W	==>	1559.24	1414903.50	3173953.92
8500.00	90.00	269.410	7136.00	1021.50N	1485.13W	==>	1657.08	1414902.47	3173853.92
8600.00	90.00	269.410	7136.00	1020.47N	1585.13W	==>	1754.91	1414901.43	3173753.93
8700.00	90.00	269.410	7136.00	1019.43N	1685.12W	==>	1852.75	1414900.40	3173653.94
8800.00	90.00	269.410	7136.00	1018.40N	1785.12W	==>	1950.59	1414899.36	3173553.95
8900.00	90.00	269.410	7136.00	1017.36N	1885.11W	==>	2048.42	1414898.33	3173453.96
9000.00	90.00	269.410	7136.00	1016.33N	1985.10W	==>	2146.26	1414897.29	3173353.97
9100.00	90.00	269.410	7136.00	1015.30N	2085.10W	==>	2244.10	1414896.26	3173253.98
9200.00	90.00	269.410	7136.00	1014.26N	2185.09W	==>	2341.93	1414895.22	3173153.99
9300.00	90.00	269.410	7136.00	1013.23N	2285.09W	==>	2439.77	1414894.19	3173054.00
9400.00	90.00	269.410	7136.00	1012.19N	2385.08W	==>	2537.61	1414893.15	3172954.01
9500.00	90.00	269.410	7136.00	1011.16N	2485.08W	==>	2635.44	1414892.12	3172854.02
9600.00	90.00	269.410	7136.00	1010.12N	2585.07W	==>	2733.28	1414891.08	3172754.03

All data is in Feet unless otherwise stated
Coordinates are from Slot MD's are from Rig and TVD's are from Rig (Planned Datum #1 4769.0ft above Mean Sea Level)
Vertical Section is from 0.00N 0.00E on azimuth 281.350 degrees
Bottom hole distance is 5011.81 Feet on azimuth 281.35 degrees from Wellhead
Calculation method uses Minimum Curvature method
Prepared by Integrated Petroleum Technologies, Inc.
Date Printed: 30-Aug-2013



INTEGRATED PETROLEUM TECHNOLOGIES, INC
SYSDRILL
Well Design Combined Report
Wellbore: DVE #10 (PWB)

Interpolated Wellpath									
MD[ft]	Inc[deg]	Azi[deg]	TVD[ft]	North[ft]	East[ft]	Dogleg [deg/100ft]	Vertical Section[ft]	Northing	Easting
9700.00	90.00	269.410	7136.00	1009.09N	2685.07W	==>	2831.12	1414890.05	3172654.03
9800.00	90.00	269.410	7136.00	1008.05N	2785.06W	==>	2928.95	1414889.01	3172554.04
9900.00	90.00	269.410	7136.00	1007.02N	2885.06W	==>	3026.79	1414887.98	3172454.05
10000.00	90.00	269.410	7136.00	1005.98N	2985.05W	==>	3124.63	1414886.94	3172354.06
10100.00	90.00	269.410	7136.00	1004.95N	3085.05W	==>	3222.46	1414885.91	3172254.07
10200.00	90.00	269.410	7136.00	1003.91N	3185.04W	==>	3320.30	1414884.88	3172154.08
10300.00	90.00	269.410	7136.00	1002.88N	3285.04W	==>	3418.14	1414883.84	3172054.09
10400.00	90.00	269.410	7136.00	1001.84N	3385.03W	==>	3515.97	1414882.81	3171954.10
10500.00	90.00	269.410	7136.00	1000.81N	3485.02W	==>	3613.81	1414881.77	3171854.11
10600.00	90.00	269.410	7136.00	999.77N	3585.02W	==>	3711.65	1414880.74	3171754.12
10700.00	90.00	269.410	7136.00	998.74N	3685.01W	==>	3809.48	1414879.70	3171654.13
10800.00	90.00	269.410	7136.00	997.70N	3785.01W	==>	3907.32	1414878.67	3171554.14
10900.00	90.00	269.410	7136.00	996.67N	3885.00W	==>	4005.16	1414877.63	3171454.14
11000.00	90.00	269.410	7136.00	995.64N	3985.00W	==>	4102.99	1414876.60	3171354.15
11100.00	90.00	269.410	7136.00	994.60N	4084.99W	==>	4200.83	1414875.56	3171254.16
11200.00	90.00	269.410	7136.00	993.57N	4184.99W	==>	4298.67	1414874.53	3171154.17
11300.00	90.00	269.410	7136.00	992.53N	4284.98W	==>	4396.51	1414873.49	3171054.18
11400.00	90.00	269.410	7136.00	991.50N	4384.98W	==>	4494.34	1414872.46	3170954.19
11500.00	90.00	269.410	7136.00	990.46N	4484.97W	==>	4592.18	1414871.42	3170854.20
11600.00	90.00	269.410	7136.00	989.43N	4584.97W	==>	4690.02	1414870.39	3170754.21
11700.00	90.00	269.410	7136.00	988.39N	4684.96W	==>	4787.85	1414869.35	3170654.22
11800.00	90.00	269.410	7136.00	987.36N	4784.95W	==>	4885.69	1414868.32	3170554.23
11900.00	90.00	269.410	7136.00	986.32N	4884.95W	==>	4983.53	1414867.29	3170454.24
11928.91	90.00	269.410	7136.00	986.02N	4913.86W	==>	5011.81	1414866.99	3170425.33

All data is in Feet unless otherwise stated
Coordinates are from Slot MD's are from Rig and TVD's are from Rig (Planned Datum #1 4769.0ft above Mean Sea Level)
Vertical Section is from 0.00N 0.00E on azimuth 281.350 degrees
Bottom hole distance is 5011.81 Feet on azimuth 281.35 degrees from Wellhead
Calculation method uses Minimum Curvature method
Prepared by Integrated Petroleum Technologies, Inc.
Date Printed: 30-Aug-2013



INTEGRATED PETROLEUM TECHNOLOGIES, INC
SYSDRILL
Well Design Combined Report
Wellbore: DVE #10 (PWB)

Hole Sections								
Diameter [in]	Start MD[ft]	Start TVD[ft]	Start North[ft]	Start East[ft]	End MD[ft]	End TVD[ft]	End North[ft]	End East[ft]
12 1/4	0.00	0.00	0.00N	0.00E	500.00	500.00	0.00N	0.00E
8 3/4	500.00	500.00	0.00N	0.00E	7632.00	7136.00	1030.49N	617.18W
6 1/8	7632.00	7136.00	1030.49N	617.18W	11928.91	7136.00	986.02N	4913.86W

Casings								
Name	Top MD[ft]	Top TVD[ft]	Top North[ft]	Top East[ft]	Shoe MD[ft]	Shoe TVD[ft]	Shoe North[ft]	Shoe East[ft]
9 5/8in Surface Casing	0.00	0.00	0.00N	0.00E	500.00	500.00	0.00N	0.00E
7.0in Intermediate Casing	0.00	0.00	0.00N	0.00E	7632.00	7136.00	1030.49N	617.18W
4 1/2in Production Liner	6500.00	6422.73	916.51N	99.88E	11928.91	7136.00	986.02N	4913.86W

Targets								
Name	North[ft]	East[ft]	TVD[ft]	Latitude	Longitude	Northing	Easting	Last Revised
DVE10 BH	986.02N	4913.86W	7136.00	40.47059557	-104.88743987	1414866.99	3170425.33	
DVE10 T2	1030.48N	617.50W	7136.00	40.47063510	-104.87199742	1414911.44	3174721.52	

Survey Tool Program						
Reference	Survey Name	MD[ft]	TVD[ft]	Survey Tool	Error Model	
61569	Planned	11928.91	7136.00	WdW Rate Gyro	Standard	

Notes

All data is in Feet unless otherwise stated
Coordinates are from Slot MD's are from Rig and TVD's are from Rig (Planned Datum #1 4769.0ft above Mean Sea Level)
Vertical Section is from 0.00N 0.00E on azimuth 281.350 degrees
Bottom hole distance is 5011.81 Feet on azimuth 281.35 degrees from Wellhead
Calculation method uses Minimum Curvature method
Prepared by Integrated Petroleum Technologies, Inc.
Date Printed: 30-Aug-2013



SYSDRILL
Closest Approach + Clearance Factor Summary Report
Wellbore: DVE #10 (PWB)

Ellipse separations are reported ONLY if BOTH wells have uncertainty data
Only Depth and Magnetic Reference Field error terms are correlated across tie points
Proximities beyond 2500.00ft with expansion rate of 0.00ft/1000ft are not reported
Scan limit is calculated on CENTRE to CENTRE distance

Summary data uses Closest Approach clearance calculation for all minima
Hole size/Casings ARE included
Hole size/Casings are NOT subtracted from Centre-Centre distance
Confidence limit of 95.00% / 2.80 SD.

Wellbore		
Name	Created	Last Revised
DVE #10 (PWB)	29-Aug-2013	29-Aug-2013

Well		
Name	Government ID	Last Revised
DVE #10		29-Aug-2013

Slot						
Name	Grid Northing	Grid Easting	Latitude	Longitude	North	East
Slot #10	1413881.0000	3175339.0000	40.46779462	-104.86980442	144.01N	0.00E

Installation				
Name	Easting	Northing	Coord System Name	North Alignment
Diamond Valley East	3175339.0000	1413737.0000	CO83-NF on NAD83 datum	Grid

Field				
Name	Easting	Northing	Coord System Name	North Alignment
Windsor Project	3162710.0707	1407271.6545	CO83-NF on NAD83 datum	Grid

Clearance Summary										
Offset WellName	Offset Wellbore	Offset Slot	Offset Structure	Separation [ft]	MD[ft]	Diverging From[ft]	Ellipse Separation [ft]	Ellipse MD[ft]	Clearance Factor	Clearance MD[ft]
DVE #11	DVE #11 (PWB)	Slot #11	Diamond Valley East	15.84	1269.27	7604.90	13.12	1302.69	3.37	11928.91
DVE #9	DVE #9 (PWB)	Slot #9	Diamond Valley East	15.88	1181.10	7677.17	13.27	1230.31	3.47	11928.91
DVE #12	DVE #12 (PWB)	Slot #12	Diamond Valley East	31.71	1271.87	1305.37	28.99	1305.37	6.06	11928.91
DVE #8	DVE #8 (PWB)	Slot #8	Diamond Valley East	31.97	1017.06	7677.17	29.63	1066.27	6.15	11928.91
DVE #13	DVE #13 (PWB)	Slot #13	Diamond Valley East	47.52	1274.48	11925.85	44.78	1308.06	7.33	11928.91
DVE #7	DVE #7 (PWB)	Slot #7	Diamond Valley East	47.96	820.21	7677.17	45.79	984.25	7.43	11928.91
DIAMOND VALLEY SW #8	DIAMOND VALLEY SW #8 REV	Slot #8	Diamond Valley SW	60.22	11928.91	11928.91	31.22	11928.91	2.08	11928.91
DVE #6	DVE #6 (PWB)	Slot #6	Diamond Valley East	63.97	820.21	7677.17	61.96	885.83	9.85	11928.91
DVE #5	DVE #5 (PWB)	Slot #5	Diamond Valley East	80.00	800.00	7677.17	78.06	803.81	13.25	11928.91
DVE #4	DVE #4 (PWB)	Slot #4	Diamond Valley East	96.00	800.00	800.00	94.06	800.00	14.86	11928.91
DVE #3	DVE #3 (PWB)	Slot #3	Diamond Valley East	112.00	800.00	7677.17	110.06	800.00	16.91	11928.91
DVE #2	DVE #2 (PWB)	Slot #2	Diamond Valley East	128.00	800.00	800.00	126.06	800.00	20.58	11928.91
DVE #1	DVE #1 (PWB)	Slot #1	Diamond Valley East	144.01	800.00	800.00	142.06	800.00	22.27	11928.91

All data is in Feet unless otherwise stated
Coordinates are from Slot MD's are from Rig and TVD's are from Rig (Planned Datum #1 4769.0ft above Mean Sea Level)
Vertical Section is from 0.00N 0.00E on azimuth 281.350 degrees
Prepared by Integrated Petroleum Technologies, Inc.
Date Printed: 30-Aug-2013



SYSDRILL
Closest Approach + Clearance Factor Summary Report
Wellbore: DVE #10 (PWB)

Clearance Summary										
Offset WellName	Offset Wellbore	Offset Slot	Offset Structure	Separation [ft]	MD[ft]	Diverging From[ft]	Ellipse Separation [ft]	Ellipse MD[ft]	Clearance Factor	Clearance MD[ft]
DIAMOND VALLEY SW #9	DIAMOND VALLEY SW #9 REV	Slot #9	Diamond Valley SW	272.10	11928.91	11928.91	235.50	11928.91	7.43	11928.91
DIAMOND VALLEY SW #7	DIAMOND VALLEY SW #7 REV	Slot #7	Diamond Valley SW	284.61	11928.91	11928.91	239.89	11928.91	6.36	11928.91
DIAMOND VALLEY SW #6	DIAMOND VALLEY SW #6 REV	Slot #6	Diamond Valley SW	564.63	11928.91	11928.91	505.35	11928.91	9.53	11928.91
DIAMOND VALLEY SW #5	DIAMOND VALLEY SW #5 REV	Slot #5	Diamond Valley SW	670.21	11928.91	11928.91	608.60	11928.91	10.88	11928.91
DIAMOND VALLEY SW #4	DIAMOND VALLEY SW #4 REV	Slot #4	Diamond Valley SW	860.38	11928.91	11928.91	799.93	11928.91	14.23	11928.91
DIAMOND VALLEY SW #3	DIAMOND VALLEY SW #3 REV	Slot #3	Diamond Valley SW	1180.01	11928.91	11928.91	1119.16	11928.91	19.39	11928.91
DIAMOND VALLEY SW #2	DIAMOND VALLEY SW #2 REV	Slot #2	Diamond Valley SW	1324.40	11928.91	11928.91	1263.39	11928.91	21.71	11928.91
Altergott #1	Altergott #1 (AWB)	Altergott #1	DVE Offset	1350.93	9180.61	9180.61	1324.03	9186.35	50.04	9268.37
DIAMOND VALLEY SW #1	DIAMOND VALLEY SW #1 REV	Slot #1	Diamond Valley SW	1501.08	11928.91	11928.91	1440.21	11928.91	24.66	11928.91
Kodak #1	Kodak #1	Slot #1	Kodak	1935.42	11928.91	11928.91	1876.77	11928.91	33.00	11928.91
Kodak #2	Kodak #2	Slot #2	Kodak	2071.80	11928.91	11928.91	2013.46	11928.91	35.51	11928.91
Kodak #3	Kodak #3	Slot #3	Kodak	2246.22	11928.91	11928.91	2188.28	11928.91	38.77	11928.91