00562940

RELINE INC.

CEMENT BOND LOG

OL458
05-071

Company	Stroud Oil Properties		
Well	Hill Ranch 29-15		
Field	Hill Ranch		
County	Las Animas	State	CO
Location	SW SE	Other Serv.	
	SEC. 29 TWP. 34S RGE. 67W		
Permanent Datum	Ground Level	Elevation	8130
Log Measured From	G.L.	Elevation	K.B. D.F. 8130 G.L. 8130
Drilling Measured From	G.L.		

Company S.O.P.
Well Hill Ranch 29-15
Field Hill Ranch
County Las Animas
State CO

Date	July 16 1997
Run Number	One
Depth Driller	2486
Depth Logger	1500
Bottom Logged Interval	1498
Top Log Interval	
Open Hole Size	8 1/2
Type Fluid	Water
Density / Viscosity	
Max. Recorded Temp.	
Estimated Cement Top	
Time Well Ready	Portable Mast
Time Logger on Bottom	
Equipment Number	4712
Location	306
Recorded By	Funk
Witnessed By	Mr. McNew

Run Number	Borehole Record Bit	From	To	Size	Tubing Record Weight	From	To

Casing Record	Size	Wt/Ft	Top	Bottom
Surface String				
Prot. String				
Production String				
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule

Comments

Database File: cb2915.db
Dataset Pathname: pass1.2
Presentation Format: cbl01.prs
Dataset Creation Date Thu Jul 17 18:34:15 1997
Charted by: Depth in Feet scaled 1:240

Gamma Ray Calibration Report		
Serial Number:	3125	
Tool Model:	Pengo	
Performed:	Wed Jul 03 08:10:18 1996	
Calibrator Value:	200	GAPI
Background Reading:	150.356	cps
Calibrator Reading:	530.289	cps
Sensitivity:	0.5	GAPI/cps

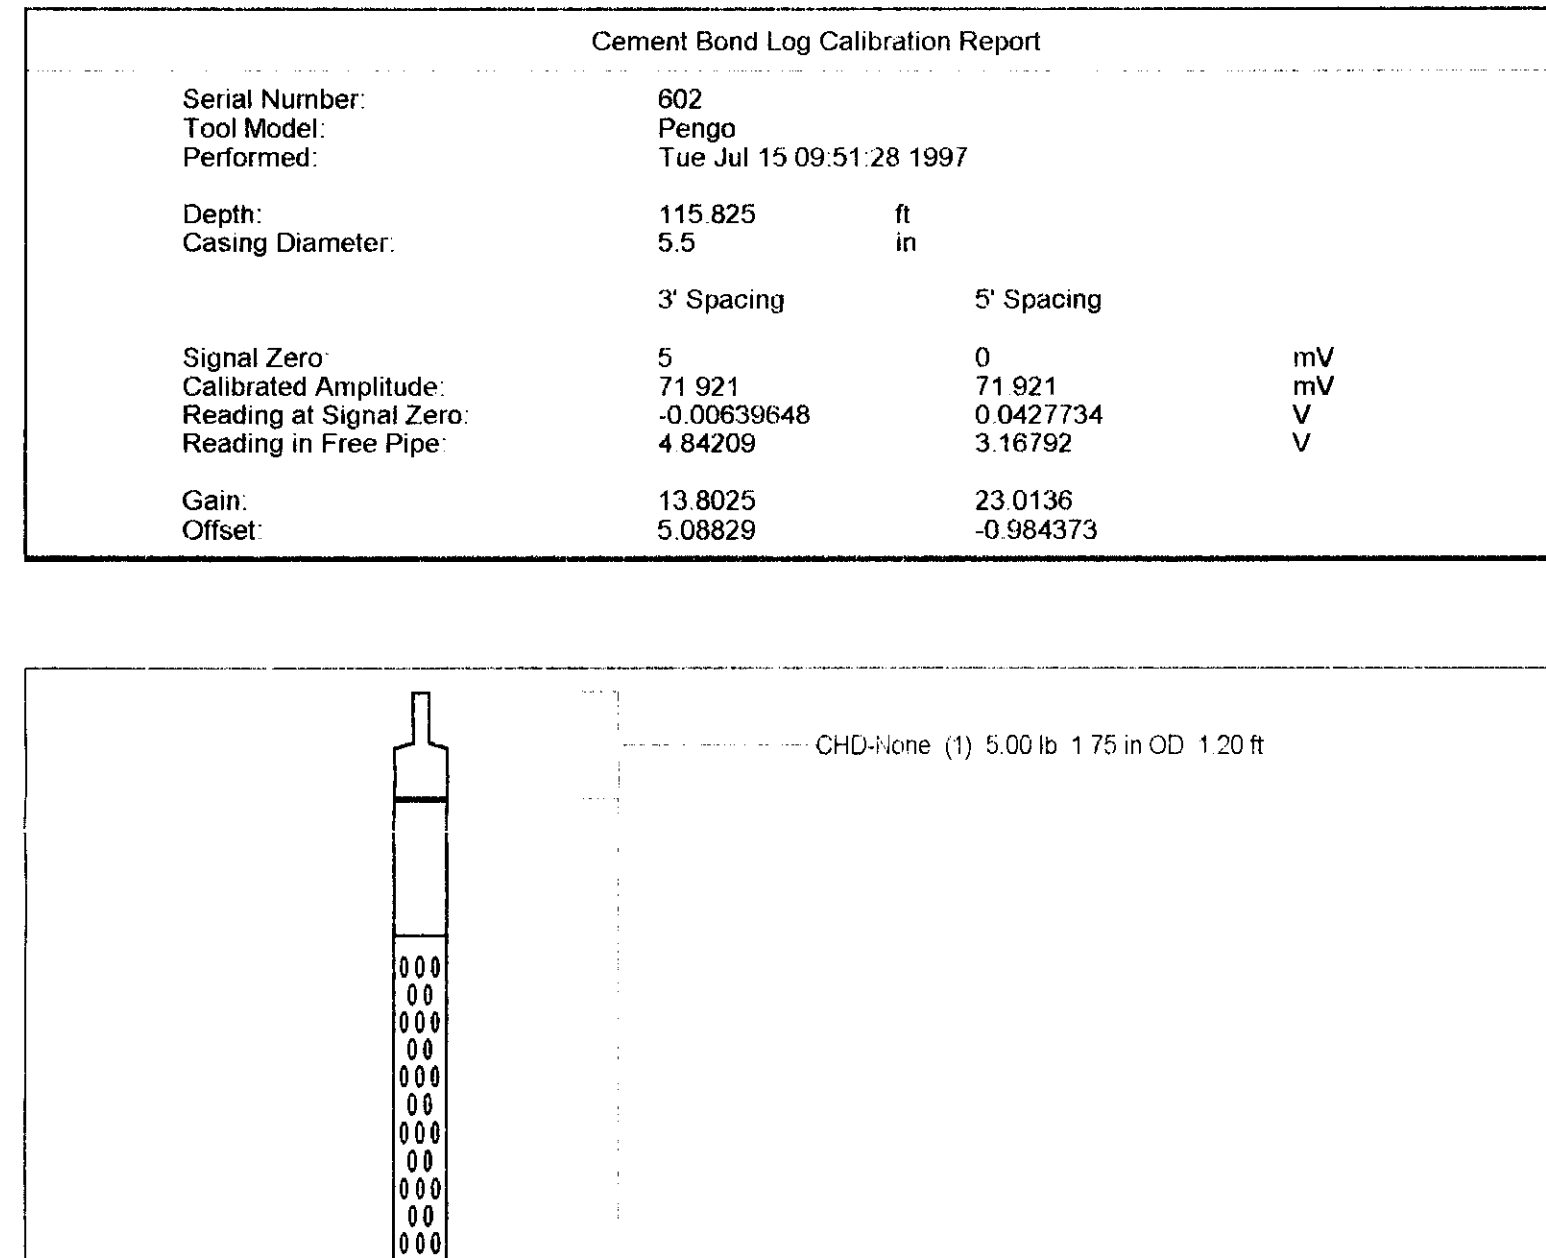Cement Bond Log Calibration Report			
Serial Number:	602		
Tool Model:	Pengo		
Performed:	Tue Jul 15 09:51:28 1997		
Depth:	115.825	ft	
Casing Diameter:	5.5	in	
	3' Spacing	5' Spacing	
Signal Zero:	5	0	mV
Calibrated Amplitude:	71.921	71.921	mV
Reading at Signal Zero:	-0.00639648	0.0427734	V
Reading in Free Pipe:	4.84209	3.16792	V
Gain:	13.8025	23.0136	
Offset:	5.08829	-0.984373