

NOBLE ENERGY INC.
 BERIG STATE K36-29
 NENW 36-4N-66W
 415' FNL & 1810' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/13/2014

API: 05-123-25632
 COGCC #


GL Elev: 4811'
 KB Elev: 4824'

Spud Date: 3/15/2008

Surface Casing :
 8 5/8" 24# @ 479'
 Cement: 251 sx
 TOC: Surface

TOC @ 1695'

Production Casing :
 4 1/2" 11.6# @ 7486'
 Cement: 900 sx
 TD: 3/18/2008

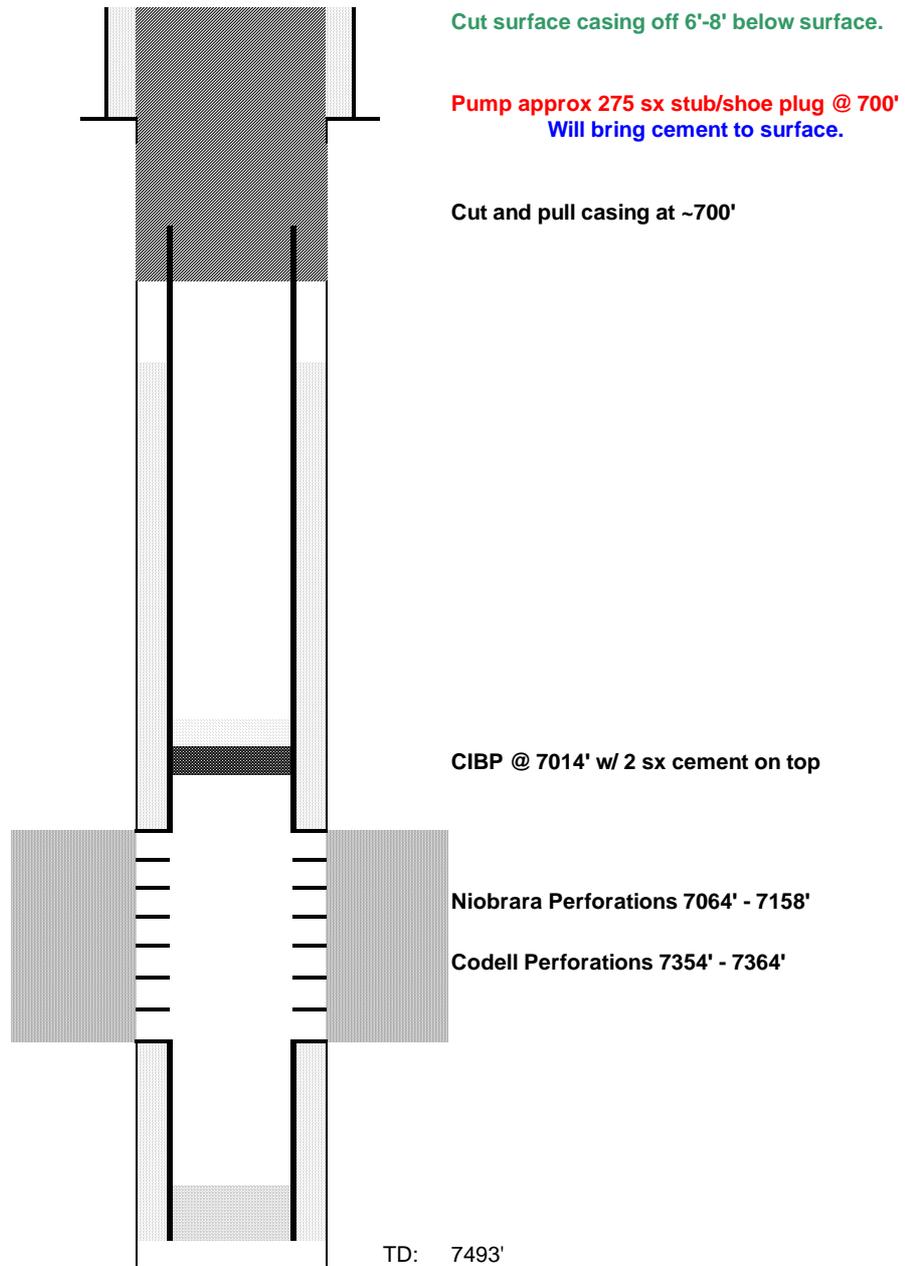

Cut surface casing off 6'-8' below surface.

Pump approx 275 sx stub/shoe plug @ 700'
 Will bring cement to surface.

Cut and pull casing at ~700'

CIBP @ 7014' w/ 2 sx cement on top

Niobrara Perforations 7064' - 7158'

Codell Perforations 7354' - 7364'

TD: 7493'