

NOBLE ENERGY INC.
PEPLER FEDERAL 01
NESE 22-4N-66W
1980' FSL & 660' FEL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
1/14/2014

API: 05-123-12499
 COGCC #

GL Elev: 4732'
 KB Elev: 4744'


Spud Date: 8/12/1985

Surface Casing :
 8 5/8" 24# @ 370'
 Cement: 210 sx
 TOC: Surface

Existing cement: 2700' - 3000'

TOC @ 6510'

Production Casing :
 4 1/2" 11.6# @ 7361'
 Cement: 240 sx
 TD: 8/18/1985

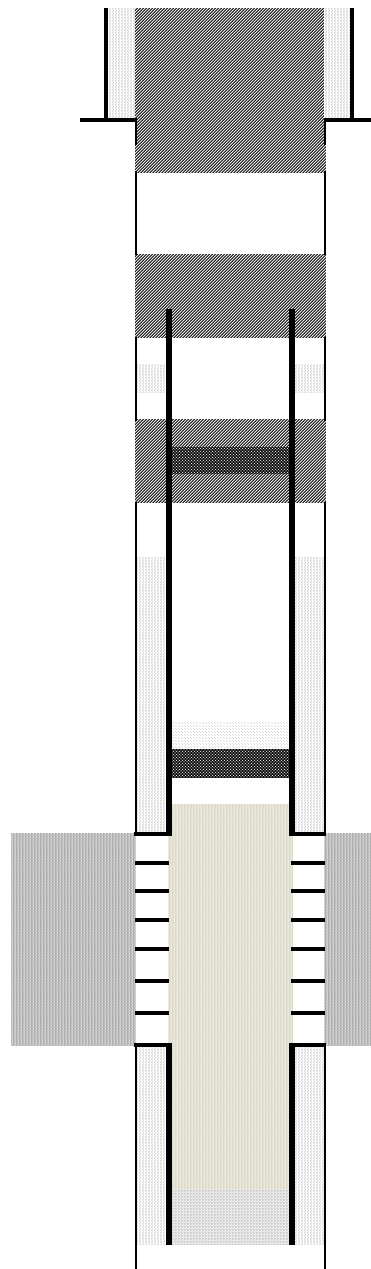

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 470'
 Will bring cement to surface.

Cut and pull casing @ +/- 2500'
 Pump 100 sx stub plug

CICR @ 4420', 60 sx through, 10 sx on top
 Squeeze holes at 4370' and 4520'

CIBP @ 6880' w/ 2 sx cement on top

Niobrara Perforations 6931' - 7131'

Codell Perforations 7227' - 7255'

Sand Plug ~6900' - 7328'

TD: 7361'