

NOBLE ENERGY INC.
 SUN SOIL PM B 31-02
 SENW 7-6N-65W
 520' FNL & 2055' FEL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/27/2014

API: 05-123-14051
 COGCC # 68670


GL Elev: 4745'
 KB Elev: 4755'

Spud Date: 2/16/1989

Surface Casing :
 8 5/8" 24# @ 309'
 Cement: 195 Sx
 TOC: Surface

TOC @ 6040'
CBL (2/24/1989)

Production Casing :
 4 1/2" 15.1# @ 7147'
 Cement: 240 sx
 TD: 2/21/1989

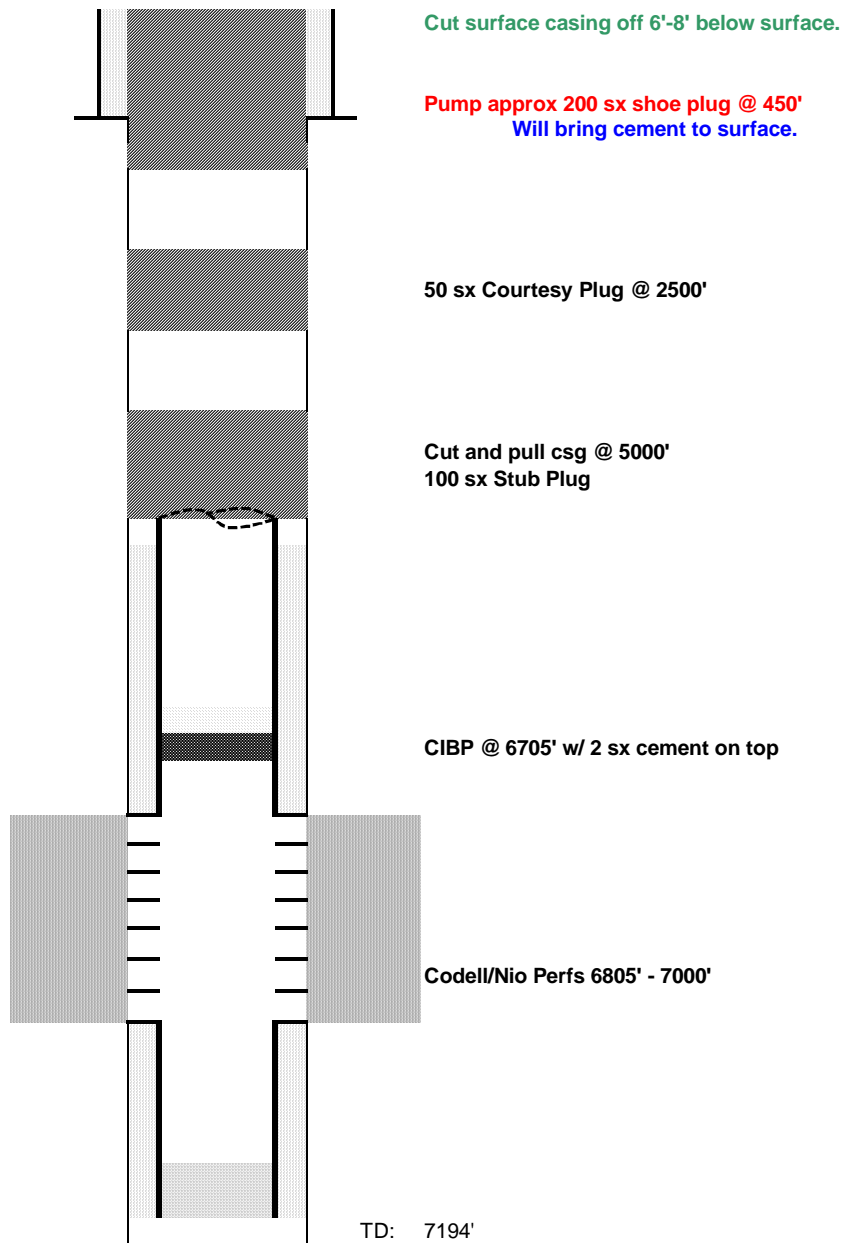

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 450'
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Cut and pull csg @ 5000'
 100 sx Stub Plug

CIBP @ 6705' w/ 2 sx cement on top

Codell/Nio Perfs 6805' - 7000'

TD: 7194'