


#1 Glenn-Huey
SE SE NW
28-2N-57W
Morgan County, Colorado

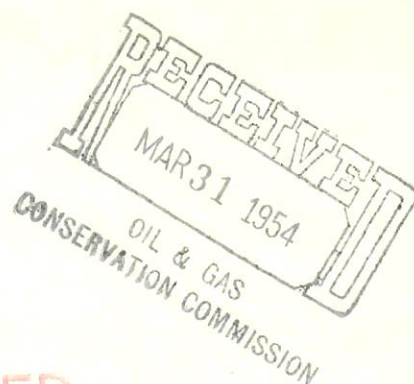

5750' "J" Test

Spudded: 2-16-54
Completed: 2-24-54

SCANNED

Surface Casing: Ran 3 joints of 10 3/4" OD 32.75#, 96.54' at 108.54' with 75 sacks of cement.

WELL RECORD

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>
0	100	Sand
100	310	Shale
310	910	Shale and bentonite
910	1761	Shale and bentonite
1761	2355	Shale and bentonite
2355	2925	Shale and bentonite
2925	3115	Shale and bentonite
3115	3562	Shale and bentonite
3562	3871	Shale and bentonite
3871	4175	Shale and bentonite
4175	4300	Shale and bentonite
4300	4782	Shale and bentonite lime
4782	5002	Shale and bentonite
5002	5066	Shale and lime
5066	5218	Shale and lime
5218	5393	Shale, lime, bentonite
5393	5508	Shale and sand
5508	5460	Shale and sand
5460	5473	Coring "D" Sand
5460	5480	Reaming rat hole
5472	5480	Coring
5480	5527	Sand and shale
5527	5541	Coring "J" Sand
5587	5541	Reaming rat hole
5541	5549	Coring
5549	5577	Sand and shale

Core #1 - rec. 5' sandstone, 14' shaley sand, no show

Core #2 - rec. 14' sandstone, no show