

**NOBLE ENERGY INC.**  
 SOCO 29-02  
 NWNE 29-5N-65W  
 900' FNL & 1898' FEL  
 Weld County, Colorado  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 1/31/2014

API: 05-123-16151  
 COGCC #

GL Elev: 4643'  
 KB Elev: 4656'


**Spud Date:**

**Surface Casing :**  
 8 5/8" 23# @ 527'  
 Cement: 360 sx  
 TOC: Surface

**Cement stage: 4000' - 4738'**  
**Via DV tool @ 4738'**

**TOC @ 6510'**

**Production Casing :**  
 4 1/2" 11.6# @ 7198'  
 Cement: 250 sx Sussex/125 sx CDL/NIO  
 TD: 9/27/1992

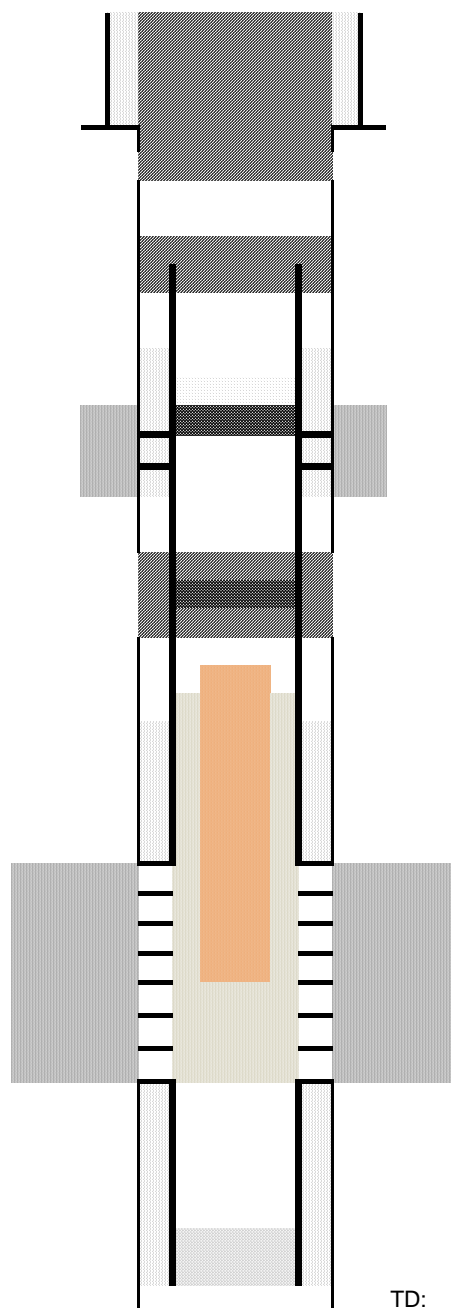

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 630'  
 Will bring cement to surface.

Cut and pull casing @ 2500'  
 Pump 100 sx stub plug

CIBP @ 4334' w/ 2 sx cement on top

Sussex Perforations 4384' - 4404'

Perforate @ 6325' & 6125'  
 CICR @ 6175'  
 Pump 85 sx through, 10 sx on top

Top of fish @ 6338'  
 Free point ~ 6500'

Niobrara Perforations 6716' - 6931'

Codell Perforations 7031' - 7041'

TD: 7197'