




Exploration and Production

Well P&A Procedure

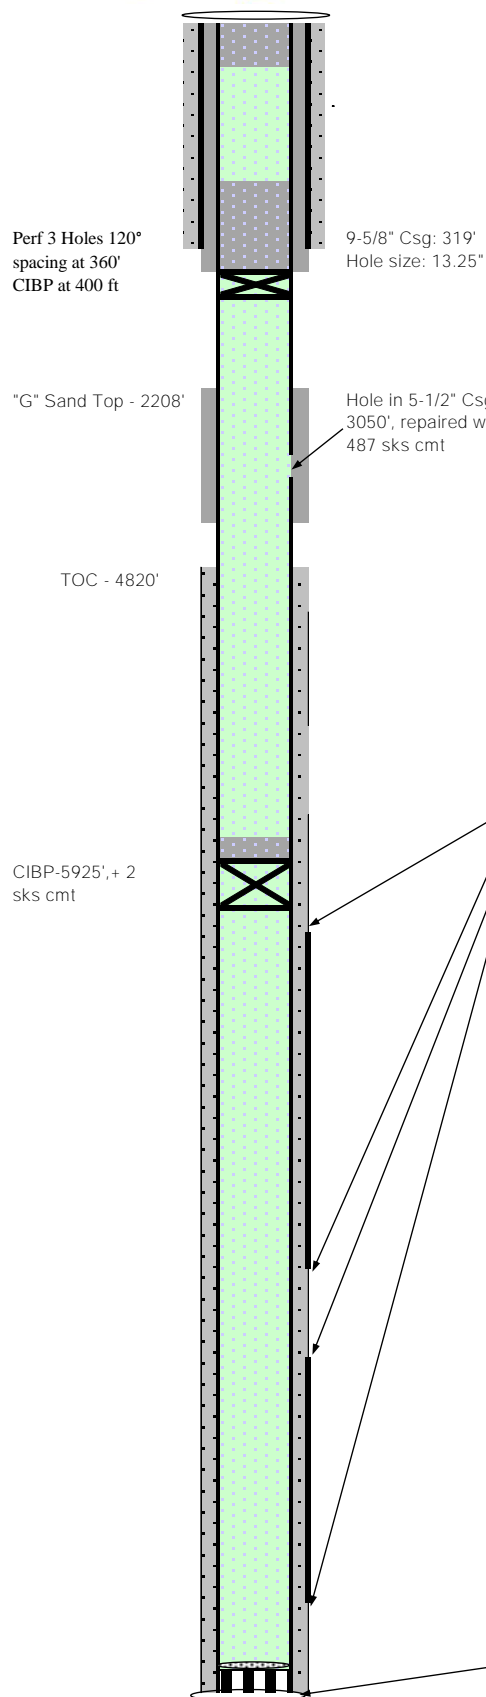

Well Name **RMV 8-16**
 Location **16-T6S-94W**
 Field **Rulison**
 County **Garfield, CO**
 API **05-045-06903**
 KB **5734'**
 Footages **600 FNL 1850 FWL**

Spud 10/19/1994

Conductor	40'	
Casing	319'	9-5/8" 36#
Cement	150 sx	Class G
Casing	8050'	5-1/2" 17# N-80
Cement	875 sx	50-50 pozz Base G

Tubing **N/A**

Formation Tops

"G" Sand	2208'
Mesaverde	4680'
Cameo	7470'

TOC - Bond Log 4820'

Completed Intervals

	<u>Depth</u>	<u># Holes</u>
<u>MV</u>	5985' - 6880'	44
<u>Cameo</u>	7360' - 7935'	22

Cement Squeezes

<u>Depth</u>	<u># Holes</u>	<u>Sx</u>
3050'	2	487
6068' - 6118'	10	150

P&A Calculations

5-1/2" OD csg in 7-7/8" hole, 0.0309 bbls/ft, 0.1733 ft³/ft
 5-1/2" OD csg in 9-5/8" 36# csg, 0.0479 bbls/ft, 0.2691 ft³/ft
 5-1/2" OD 17# csg capacity, 0.0232 bbls/ft, 0.1305 ft³/ft
 15 sx, 2 bbls, 5-1/2" csg in 7-7/8" hole, 40 ft, 30% excess
 28 sx, 4.8 bbls, 5-1/2" 17# csg in 9-5/8" 36# csg, 100 ft
 14 sx, 2.3 bbl, 5-1/2" 17# csg, 100-ft
 7 sx, 1.2 bbls, 5-1/2" 17# csg, 50-ft surface plug
 14 sx, 2 bbl, 5-1/2" csg in 9-5/8" 36# csg, 50-ft
78 sx Total Cement, 15.5#, 0.96 ft³/n
13 Total Bbls Cement

TD **8050', 5-1/2" Csg, Hole Size, 7-7/8"**