

Keota 1
40.573276 / -104.062541
05-123-14360

Keota 1 Procedure

1. Survey and locate plugged wellbore. Set a stake and record as-drilled GPS coordinates.
2. Excavate around wellbore to expose the top of the surface casing.
3. Cut existing cap off wellbore. Weld a slip collar to 8-5/8" casing and necessary length of casing to reach ground level. Weld another 8-5/8" slip collar.
4. MIRU workover rig.
5. Install wellhead and BOP. Test BOP.
6. PU and RIH with 6-1/4" tricone bit, 10 3-1/2" drill collars, and 2-7/8", 6.5#, L80, EUE workstring.
7. Drill out 1st surface cement plug and circulate hole clean.
8. Continue drilling or RIH to top of 2nd surface casing plug. Record depth of plug.
9. Pressure test surface casing to 250 psi. If surface casing fails pressure test, contact engineer and hunt holes.
10. After pressure test of surface casing, drill out surface casing plug. If pressure is encountered below surface casing plug, circulate hole with mud or kill fluid until well is dead or blown down.
11. POOH and LD 6-1/4" tricone bit.
12. PU and RIH with mule shoe and 2-7/8" L80 tubing down to 6650' and tag existing D Sand plug.
 - **IF D SAND PLUG IS MISSING:** RIH to 6835', RU cement crew, pressure test lines to 4,500 psi, and spot plug from 6835'-6735' with 15.8 ppg (1.15 cuft/sk) Class G neat cement (60 sks) to cover the D Sand formation.
13. POOH and spot plug from 6126'-5826' with 15.8 ppg (1.15 cuft/sk) Class G neat cement (100 sks) to cover the Niobrara formation.
 - **IF CIRCULATION IS NOT MAINTAINED WHILE PUMPING PLUG:**
 - i. POOH to surface casing. Wait 4 hours and tag TOC. Record tag depth. If tag is deeper than 5826', contact engineer.
 - **FROM THIS POINT MOVING FORWARD:** Must wait a sufficient time on all subsequent plugs to confirm static conditions. If at any time after placing this plug there is evidence of pressure or of fluid migration, contact engineer before continuing operations.
14. POOH and spot plug from 1512'-1362' with 15.8 ppg (1.15 cuft/sk) Class G neat cement (60 sks) to cover the Pierre formation.
15. POOH to surface casing. Wait 4 hours and tag TOC. Record tag depth. If tag is deeper than 1412', contact engineer.
16. POOH and spot plug from 500' to surface with 15.8 ppg (1.15 cuft/sk) Class G neat cement (160 sks).
 - **IF CEMENT DOES NOT RETURN TO SURFACE:**
 - i. POOH. Wait 4 hours and tag TOC. Record tag depth. If tag is deeper than 172', contact engineer.
 - ii. Pump 15.8 ppg (1.15 cuft/sk) Class G neat cement at tag depth to surface.
17. RDMO. Top off cement after rig has moved, if necessary.
18. After surface plug has set, cut casing to 5' below ground level and weld on a plate to seal the well.
19. Inscribe the well's legal location, well name and number, and API number on the plate as shown:

1980' FSL, 1980' FWL, NESW Sec 14, T7N, R60W
Keota 1
05-123-14360

20. Photograph welded name plate and conduct bubble test before proceeding.
21. After Bubble Test is successfully performed, backfill hole and reclaim surface to original conditions.

22. Cover up the well and remediate the disturbed area.


Keota 1 Cement Plug Table

CEMENT PLUG TABLE									
Plug Number	Plug Status	Formation	Plug Bottom Depth	Plug Top Depth	Cement Class	Yield (ft^3/sk)	Number of Sacks	Must Be Tagged?	Maximum Tag Depth
1	Existing	D&J Sand	6695'	6650'	Unknown	Unknown	25	Yes	6695'
2	New	Niobrara	6126'	5826'	G	1.15	100	Possibly	5826'
3	New	Pierre	1512'	1362'	G	1.15	60	Yes	1412'
4	New	Fresh Water	430'	Surface	G	1.15	160	Possibly	172'
TOTAL NEW SKS OF CEMENT REQUIRED:							320		

Current Wellbore Schematic

Well Name: Keota 1
 Location: 1980' FSL, 1980' FWL, NESW Sec 14, T7N, R60W
 County: Weld
 API #: 05-123-14360
 Co-ordinates: 40.573276 / -104.062541
 Elevations: GROUND: 4880'
 KB: 4892'
 Depths (KB): PBTD: --
 TD: 6950'

Date Prepared: 6/26/2025
 Last Updated: 6/26/2025
 Spud Date: 8/4/1989
 Completion Date: 8/9/1989
 Last Workover Date: 8/9/1989
 Prepared by: Jake Van Bramer
 Updated by: --

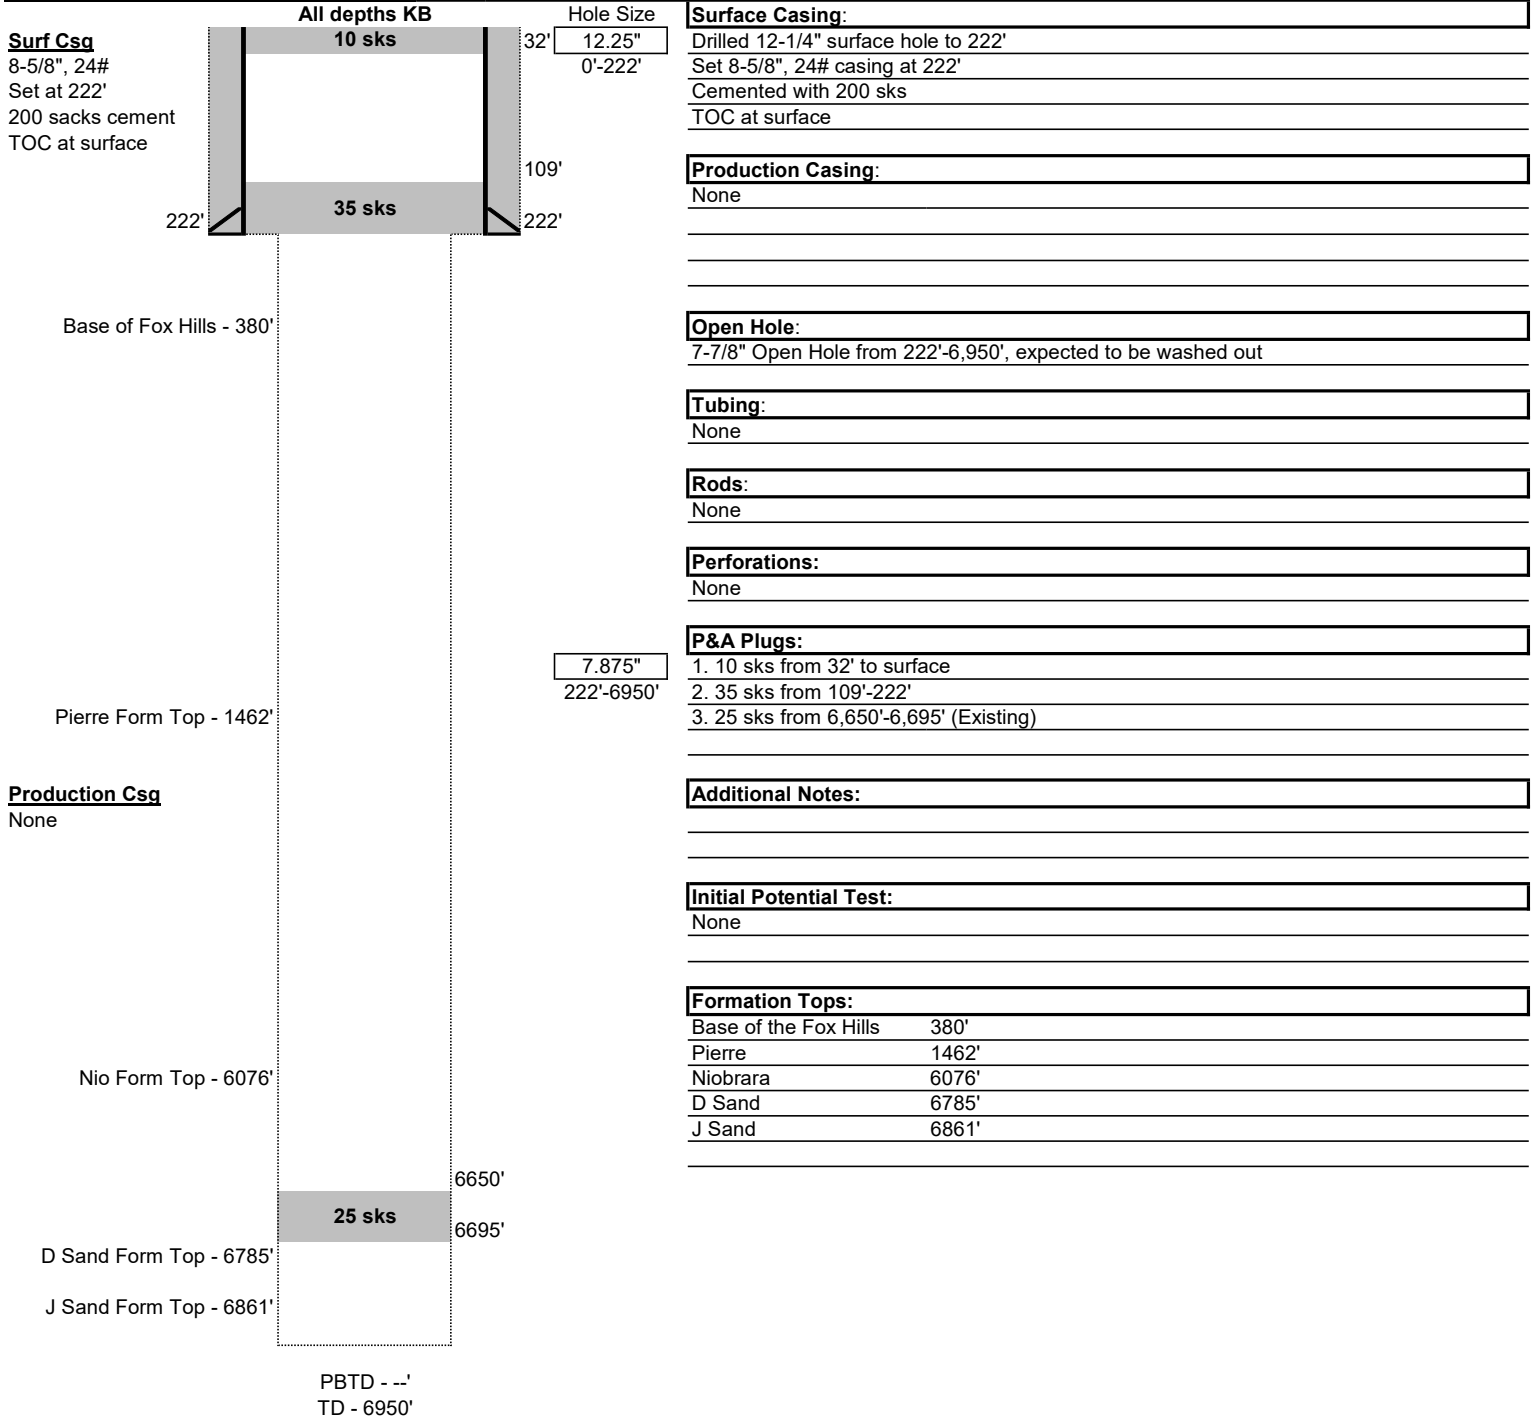

Proposed Wellbore Schematic

Well Name: Keota 1
 Location: 1980' FSL, 1980' FWL, NESW Sec 14, T7N, R60W
 County Weld
 API #: 05-123-14360
 Co-ordinates: 40.573276 / -104.062541
 Elevations: GROUND: 4880'
 KB: 4892'
 Depths (KB): PBTD: --
 TD: 6950'

Date Prepared: 6/26/2025
 Last Updated: 6/26/2025
 Spud Date: 8/4/1989
 Completion Start Date: 8/9/1989
 Last Workover Date: 8/9/1989
 Prepared by: Jake Van Bramer
 Updated by: --

