

NOBLE ENERGY INC.
ANDERSON E24-12
NWSW 24-6N-65W
1980' FSL & 660' FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/19/2014

API: 05-123-16841
 COGCC #

GL Elev: 4696'
 KB Elev: 4708'

Spud Date: 3/17/1993


Surface Casing :
 8 5/8" @ 349'
 Cement: 300 sx
 TOC: Surface

Annular fill cement 1728' - 3381'
Verify with CBL

Stage cement 3410' - 4110'

TOC @ 6070'

Production Casing :
 2 7/8" 6.5# @ 7125'
 Cement: 330 sx prod/270 sx stage
 TD: 3/22/1993

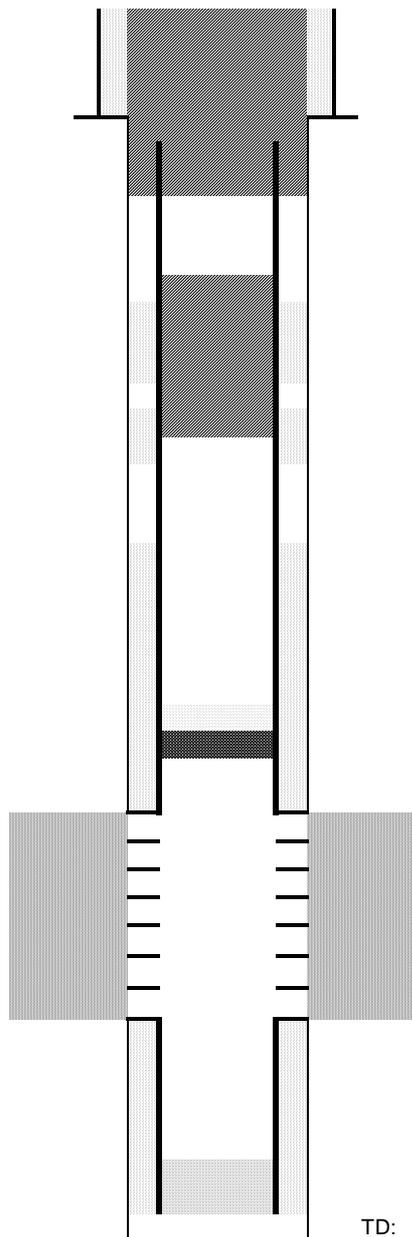

Cut surface casing off 6'-8' below surface.

Pump approx 275 sx stub/shoe plug @ 600'
Will bring cement to surface.

Cut and pull casing at 600'

Pump 60 sx balance plug at 3600'

CIBP @ 6917' w/ 2 sx cement on top

Codell Perforations 6967' - 6983'

TD: 7128'