

NOBLE ENERGY INC.
 LILLI UNIT 14-03
 SESW 3-8N-58W
 660' FSL & 1980' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/28/2014

API: 05-123-14009
 COGCC #


GL Elev: 4672'
 KB Elev: 4682'

Spud Date: 7/27/1988

Surface Casing :
 8 5/8" 24# @ 224'
 Cement: 125 sx
 TOC: Surface

TOC @ 5358'

Production Casing :
 4 1/2" 10.5# @ 6388'
 Cement: 220 sx
 TD: 7/31/1988

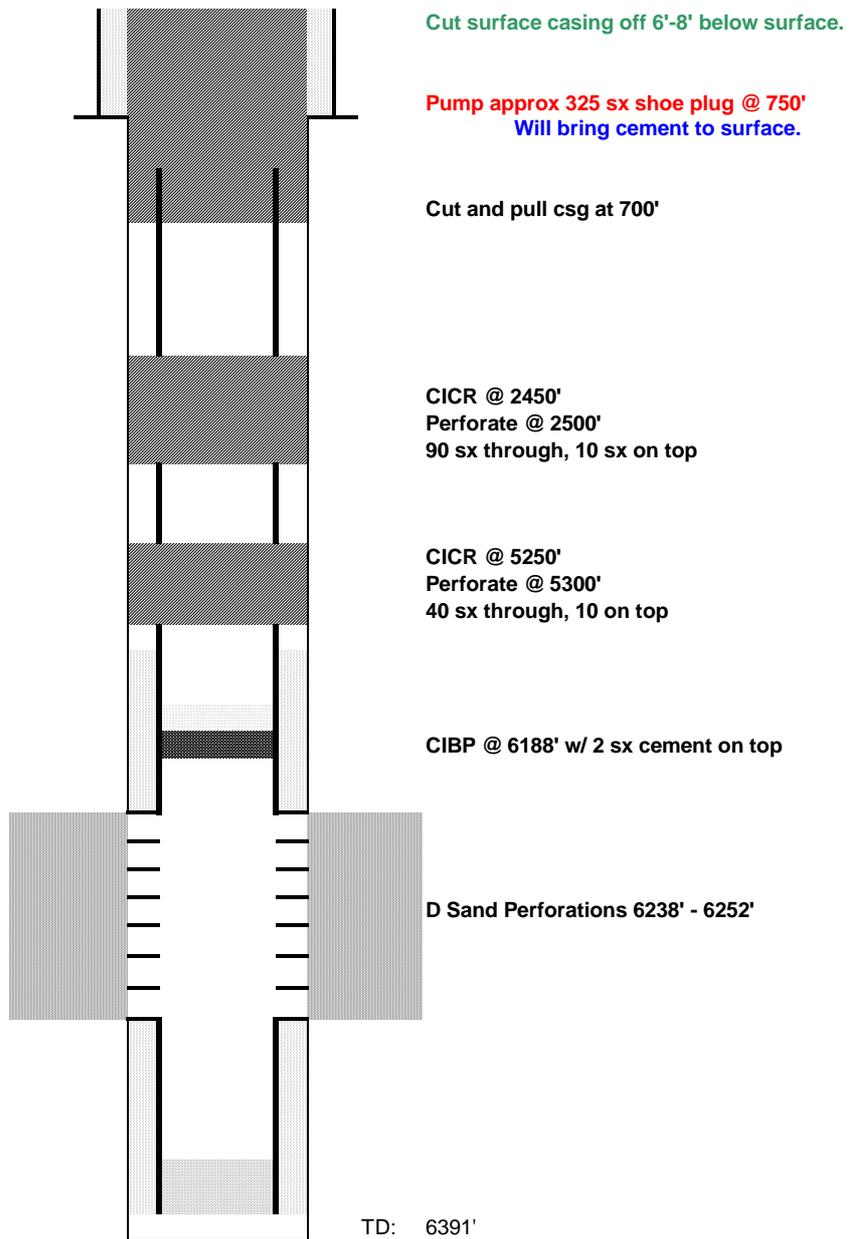

Cut surface casing off 6'-8' below surface.

Pump approx 325 sx shoe plug @ 750'
 Will bring cement to surface.

Cut and pull csg at 700'

CICR @ 2450'
 Perforate @ 2500'
 90 sx through, 10 sx on top

CICR @ 5250'
 Perforate @ 5300'
 40 sx through, 10 on top

CIBP @ 6188' w/ 2 sx cement on top

D Sand Perforations 6238' - 6252'

TD: 6391'