

NOBLE ENERGY INC.
 DINNER 13-33
 SWSW 13-6N-65W
 854' FSL & 692' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/10/2014

API: 05-123-22370
 COGCC #

GL Elev: 4701'
 KB Elev: 4711'

Spud Date: 1/12/2005


Surface Casing :
 8 5/8" 24# @ 395'
 Cement: 180 sx
 TOC: Surface

Stage Cement from 3088' to 3240'

Spacer Cement from 3240' to 6188'

TOC @ 6188'

Production Casing :
 4 1/2" 11.6# @ 7182'
 Cement: 160 sx + 410 sx
 TD: 1/19/2005

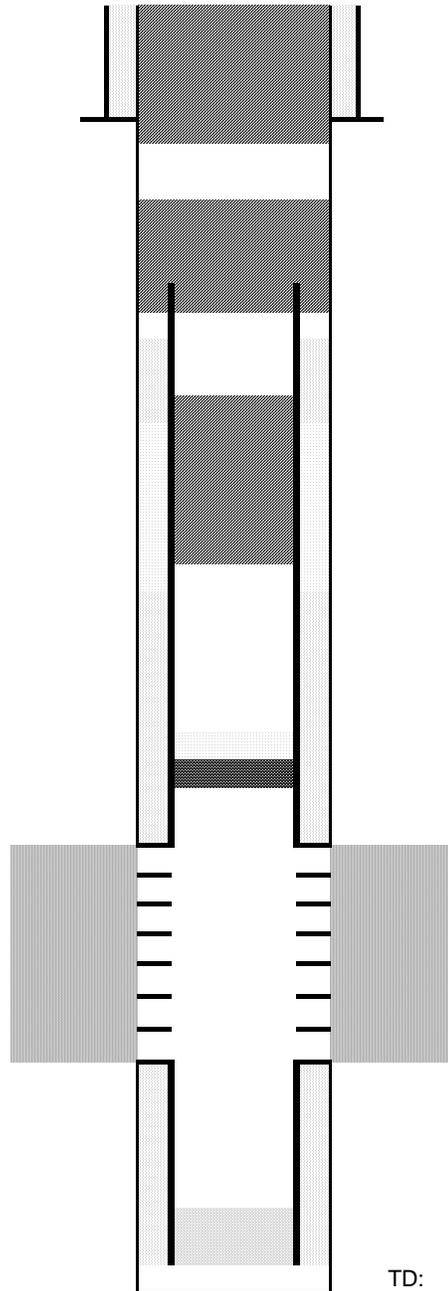

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 510'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

100 sx Balance Plug @ 4600'

CIBP @ 6614' w/ 2 sx cement on top

Niobrara Perforations 6664' - 6904'

Codell Perforations 6986' - 7000'

TD: 7186'