

NOBLE ENERGY INC.
 DINNER 13-32
 NWSW 13-6N-65W
 1989' FSL & 659' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/3/2014

API: 05-123-21942
 COGCC #

GL Elev: 4700'
 KB Elev: 4710'

Spud Date: 6/9/2004


Surface Casing :
 8 5/8" 24# @ 396'
 Cement: 270 sx
 TOC: Surface

Stage Cement from 3080' to 3780'

Spacer Cement from 6190' to 3780'

TOC @ 6190'

Production Casing :
 4 1/2" 11.6# @ 7128'
 Cement: 266 sx lead + 218 sx spacer
 + 140 sx tail
 TD: 6/15/2004

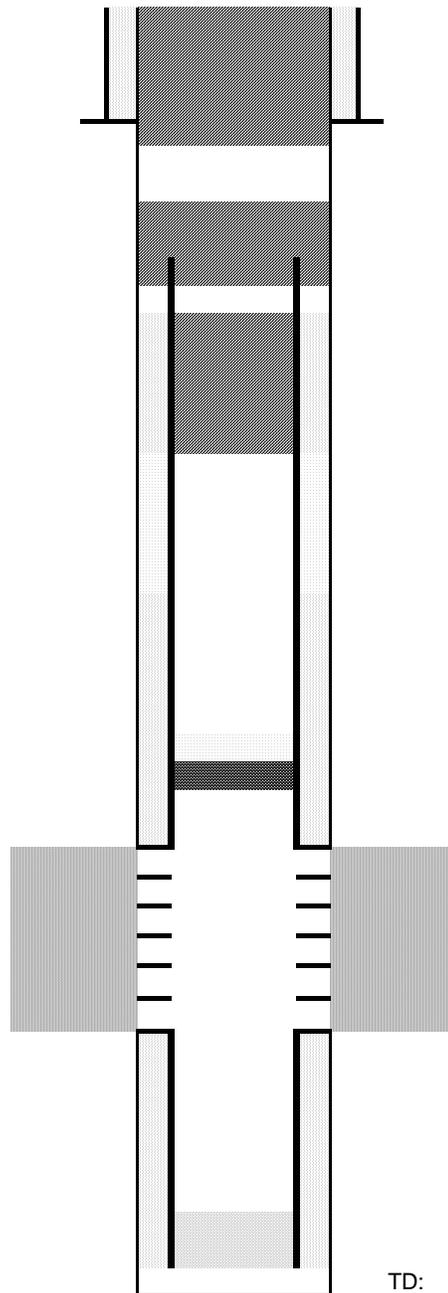

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 500'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

75 sx Balance Plug @ 3800'

CIBP @ 6650' w/ 2 sx cement on top

Niobrara Perforations 6709' - 6865'

Codell Perforations 7023' - 7038'

TD: 7140'