

**NOBLE ENERGY INC.**  
**BICKLING E22-07**  
**SWNE 22-6N-65W**  
**2205' FNL & 1981' FEL**  
**Weld County, Colorado**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**3/24/2014**

API: 05-123-18787  
 COGCC #

GL Elev: 4735'  
 KB Elev: 4745'


**Spud Date:** 1/14/1995

**Surface Casing :**  
 8 5/8" 24# @ 387'  
 Cement: 270 sx  
 TOC: Surface

**Stage Cement from 2894' to 4679'**

**TOC @ 5990'**

**Production Casing :**  
 2 7/8" 6.5# @ 7230'  
 Cement: 500 sx + 270 sx  
 TD: 1/18/1995

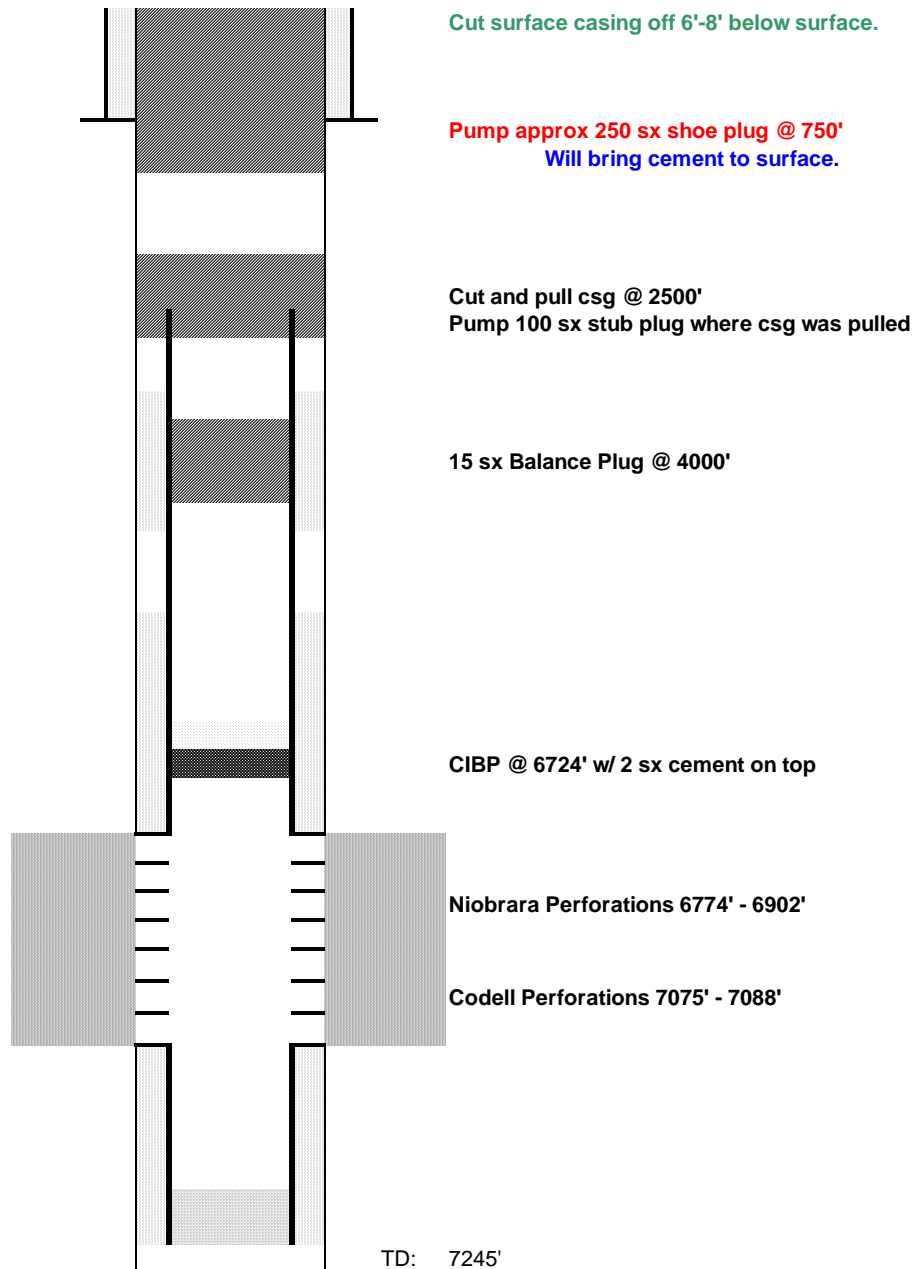

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 750'  
 Will bring cement to surface.

Cut and pull csg @ 2500'  
 Pump 100 sx stub plug where csg was pulled

15 sx Balance Plug @ 4000'

CIBP @ 6724' w/ 2 sx cement on top

Niobrara Perforations 6774' - 6902'

Codell Perforations 7075' - 7088'

TD: 7245'