

NOBLE ENERGY INC.
BURKE 24-03
NESE 24-4N-65W
2003' FSL & 658' FEL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
3/26/2014

API: 05-123-14522
 COGCC #

GL Elev: 4830'
 KB Elev: 4839'

Spud Date:

Surface Casing :

8 5/8" 24# @ 439'
 Cement: 280 sx
 TOC: Surface


Remedial Casing Cement from 705' to Surface

Remedial Casing Cement from 3150' to 4132'

TOC @ 4132'

Production Casing :

4 1/2" 15.1# @ 7198'
 Cement: 1020 sx
 TD: 1/13/1990

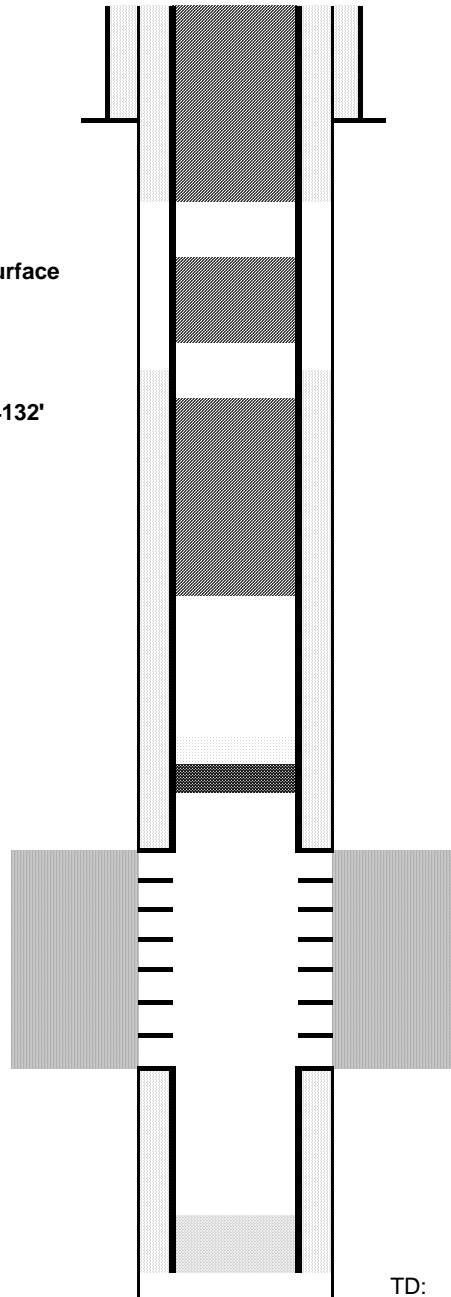

Cut surface casing off 6'-8' below surface.

Pump approx 55 sx shoe plug @ 700'
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

125 sx Balance Plug @ 4900'

CIBP @ 6789' w/ 2 sx cement on top

Niobrara Perforations 6839' - 7015'

Codell Perforations 7124' - 7138'

TD: 7225'