


RECEIVED

NOV 15 04

COGCC

Petrostates Federal #10-27
1600' FSL & 2450' FEL NW SE Sec 27-T9N-R78W, 6th P.M.
Jackson County, Colorado
API # 05-057-06325

8322' KB
8316' GL

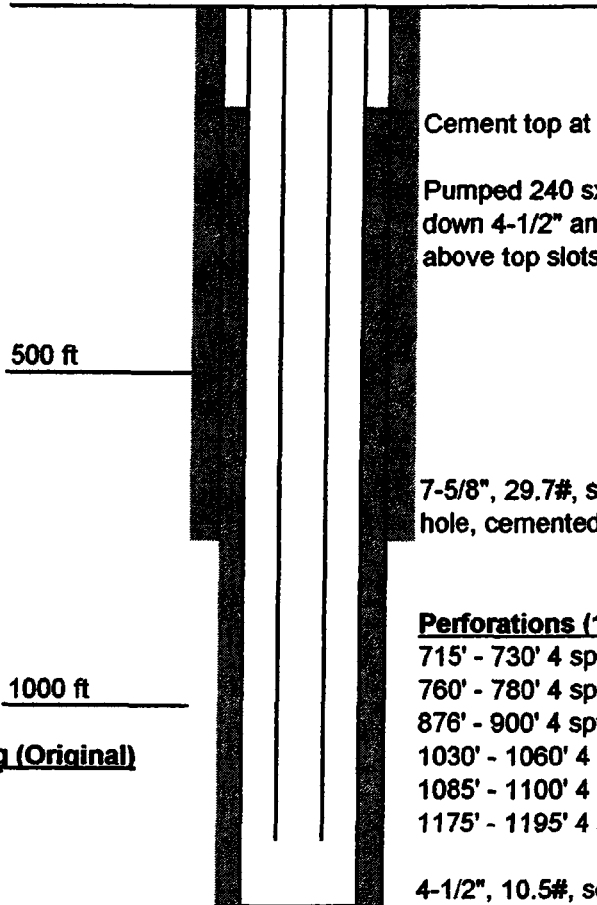

Cement top at ~360' KB

Pumped 240 sx Class G w/ 2% CaCl
down 4-1/2" and up annulus, displace 1 bbl
above top slots (10/04)

7-5/8", 29.7#, set at 709' KB in a 9-5/8"
hole, cemented to surface with 310 sx.

Perforations (10/04)

715' - 730' 4 spf
760' - 780' 4 spf
876' - 900' 4 spf
1030' - 1060' 4 spf
1085' - 1100' 4 spf
1175' - 1195' 4 spf

4-1/2", 10.5#, set at 1293' KB, in a
6-3/4" hole. No cement pumped when set.

PBTD - 1298' KB
TD - 1300' KB

Slotted Casing (Original)

993' - 1073'
1152' - 1192'
1231' - 1271'

Updated November 10, 2004 trz