

NOBLE ENERGY INC.
 LATHAM 02-43
 SWSE 2-4N-65W
 661' FSL & 1980' FEL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/8/2014

API: 05-123-15775
 COGCC #

GL Elev: 4674'
 KB Elev: 4684'


Spud Date: 7/14/1992

Surface Casing :
 8 5/8" 24# @ 425'
 Cement: 120 sx Lite + 150 sx Reg
 TOC: Surface

Stage Cement from 3973' to 5150'

TOC @ 6252'

Production Casing :
 4 1/2" 12.6# @ 7166'
 Cement: 140 sx Class G
 TD: 1/0/1900

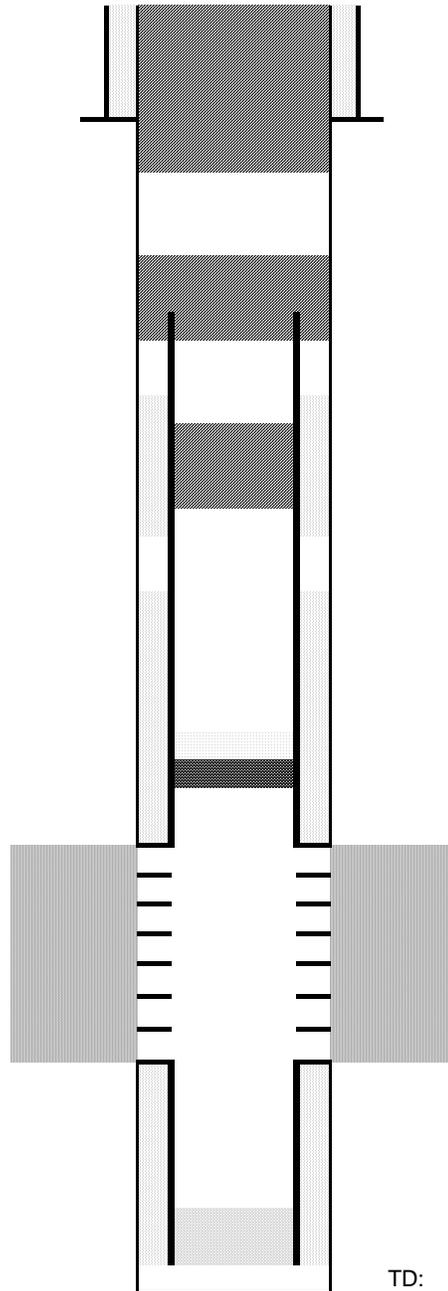

Cut surface casing off 6'-8' below surface.

Pump approx 180 sx shoe plug @ 550'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

30 sx Balance Plug @ 4600'

CIBP @ 6670' w/ 2 sx cement on top

Niobrara Perforations 6720' - 6905'

Codell Perforations 7002' - 7016'

TD: 7158'