

NOBLE ENERGY INC.
SHABLE USX PC AB11-63-1HNL
SWSW 11-7N-64W
698' FSL & 250' FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/24/2014

API: 05-123-36701
 COGCC #


GL Elev: 4818'
 KB Elev: 4834'

Spud Date: 5/20/2013

Surface Casing :
 9 5/8" 36# @ 792'
 Cement: 360 sx
 TOC: Surface

Intermediate Casing :
 7" 26# @ 6912'
 Cement: 490 sx
 TOC: 1282'

Production Casing :
 4 1/2" 11.6# @ 16389'
 Cement: None
 TD: 6/7/2013

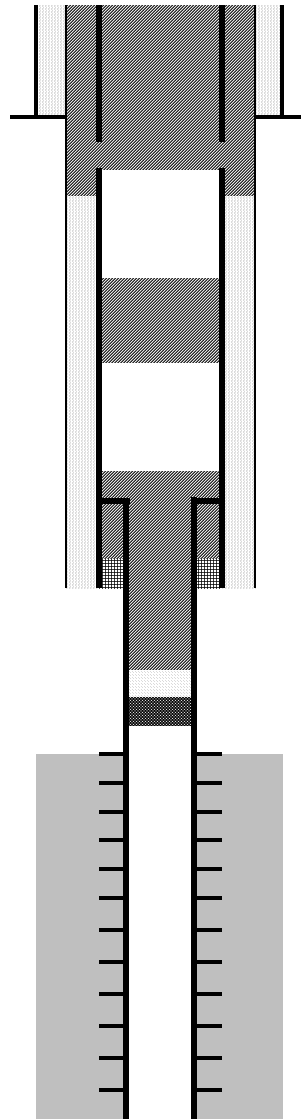

Cut surface casing off 6'-8' below surface.

Pump approx 325 sx shoe plug @ 900'
 Will bring cement to surface.

Perforate casing @ 900'

50 sx Courtesy Plug @ 2500'

Release TBR @ 7143'
 Pump 100 sx stub plug on top of CIBP @ 7250'

CIBP @ 7250'

Niobrara Frac Ports 7279' - 16378'

TD: 16399'