

**NOBLE ENERGY INC.**  
**PAPPENHEIM 02-32**  
**SENE 32-7N-65W**  
**1980' FNL & 660' FEL**  
**Weld County, Colorado**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**4/28/2014**

API: 05-123-11851  
 COGCC #


GL Elev: 4819'  
 KB Elev: 4829'

Spud Date: 6/3/1984

**Surface Casing :**  
 8 5/8" 24# @ 346'  
 Cement: 260 sx  
 TOC: Surface

TOC @ 6478'

**Production Casing :**  
 4 1/2" ?# @ 7290'  
 Cement: 190 sx  
 TD: 6/29/1984

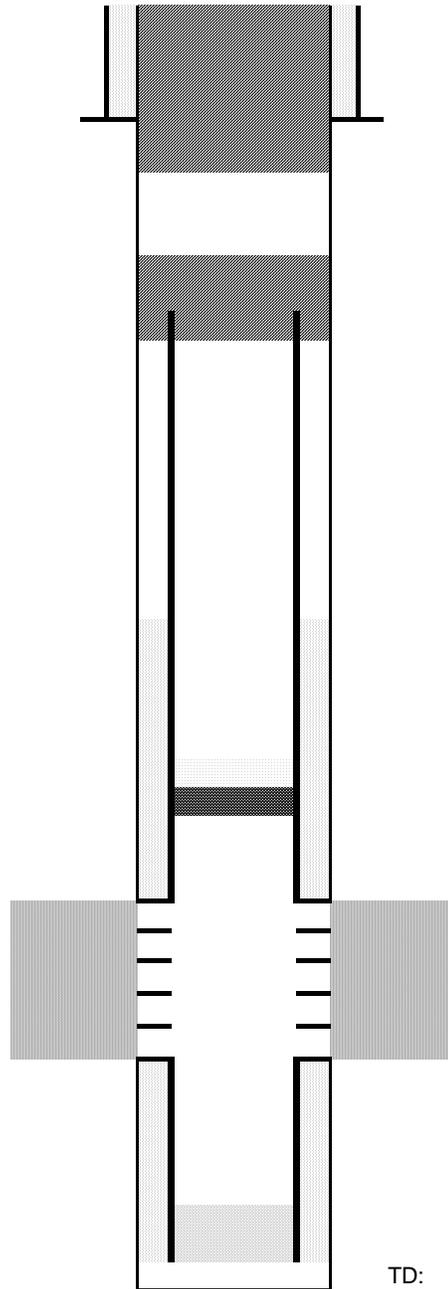

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 670'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 7148' w/ 2 sx cement on top

Codell Perforations 7198' - 7208'

TD: 7300'