



# NABORS

**COMPLETION  
& PRODUCTION  
SERVICES CO.**

## DUAL INDUCTION LOG

Company	MULL DRILLING COMPANY, INC.		
Well	DICKEY "A" #1-14		
Field			
County	CHEYENNE	State	COLORADO
Location:	AP1 #: 05-017-07776-0000 1927' FNL & 1119' FEL		Other Services CDL/CNL/PE MEL/SON
Permanent Datum	SEC 14 TWP 16S RGE 45W	GROUND LEVEL	Elevation 4368
Log Measured From		KELLY BUSHING 11' A.G.L.	K.B. 4379 D.F. 4377 G.L. 4368
Drilling Measured From		KELLY BUSHING	
Date	1/5/14		
Run Number	ONE		
Depth Driller	5560		
Depth Logger	5562		
Bottom Logged Interval	5560		
Top Log Interval	00		
Casing Driller	8 5/8" @ 647		
Casing Logger	640		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5000 PPM	
Density / Viscosity	9.1/54		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.70 @ 50F		
Rmt @ Meas. Temp	.52 @ 50F		
Rmc @ Meas. Temp	.84 @ 50F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.26 @ 130F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	130F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	PHIL ASKEY		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

### Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395  
DIRECTIONS:  
CHEYENNE WELLS, CO. - 9 SOUTH TO RD G - 6 WEST - 3 SOUTH - 1 MILE EAST INTO

Database File:

22117pe.db

Dataset Pathname:

pass3.3

Presentation Format:

\_dil2


Dataset Creation:


Sun Jan 05 14:36:26 2014 by Calc Open-Cased 090629

Charted by:

Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50	
-100	SP (mV)	100	0	RILD (Ohm-m)	50	
-----			1000			CILD (mmho/m)
			50	RILD X10 (Ohm-m)	500	
			50	RLL3 X10 (Ohm-m)	500	

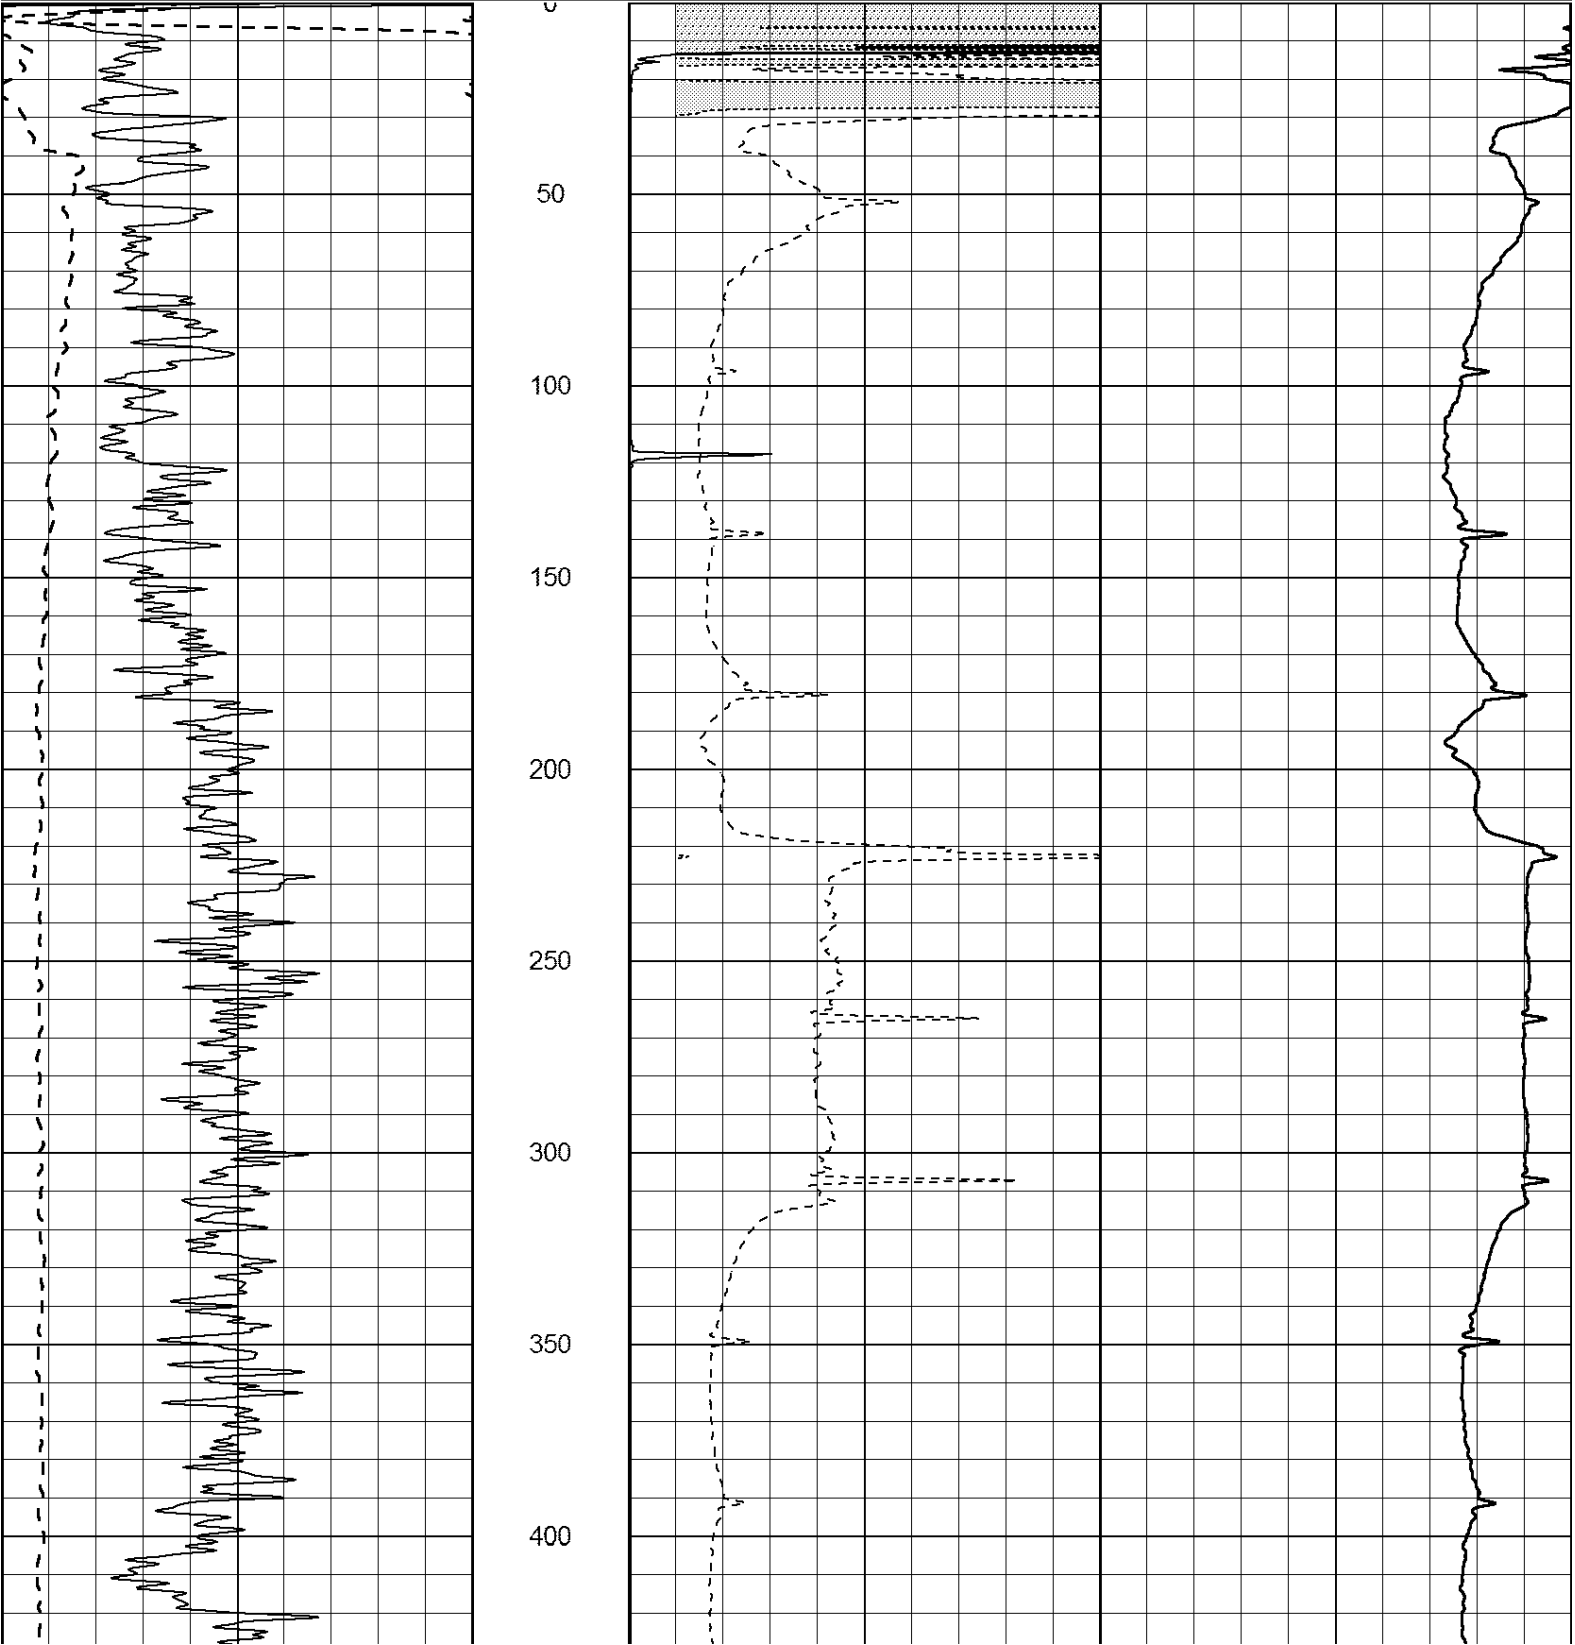

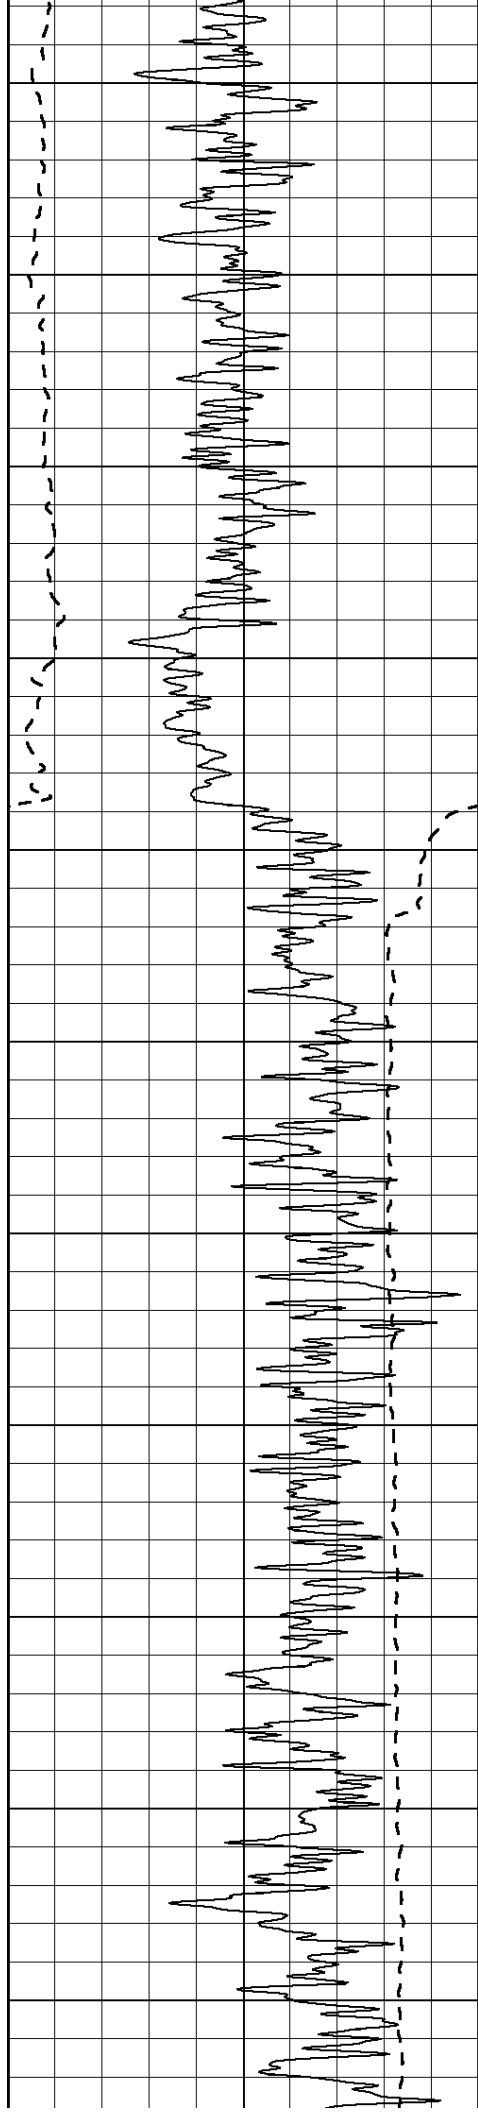

450

500

550

600

650

700


750


800

850

900

950

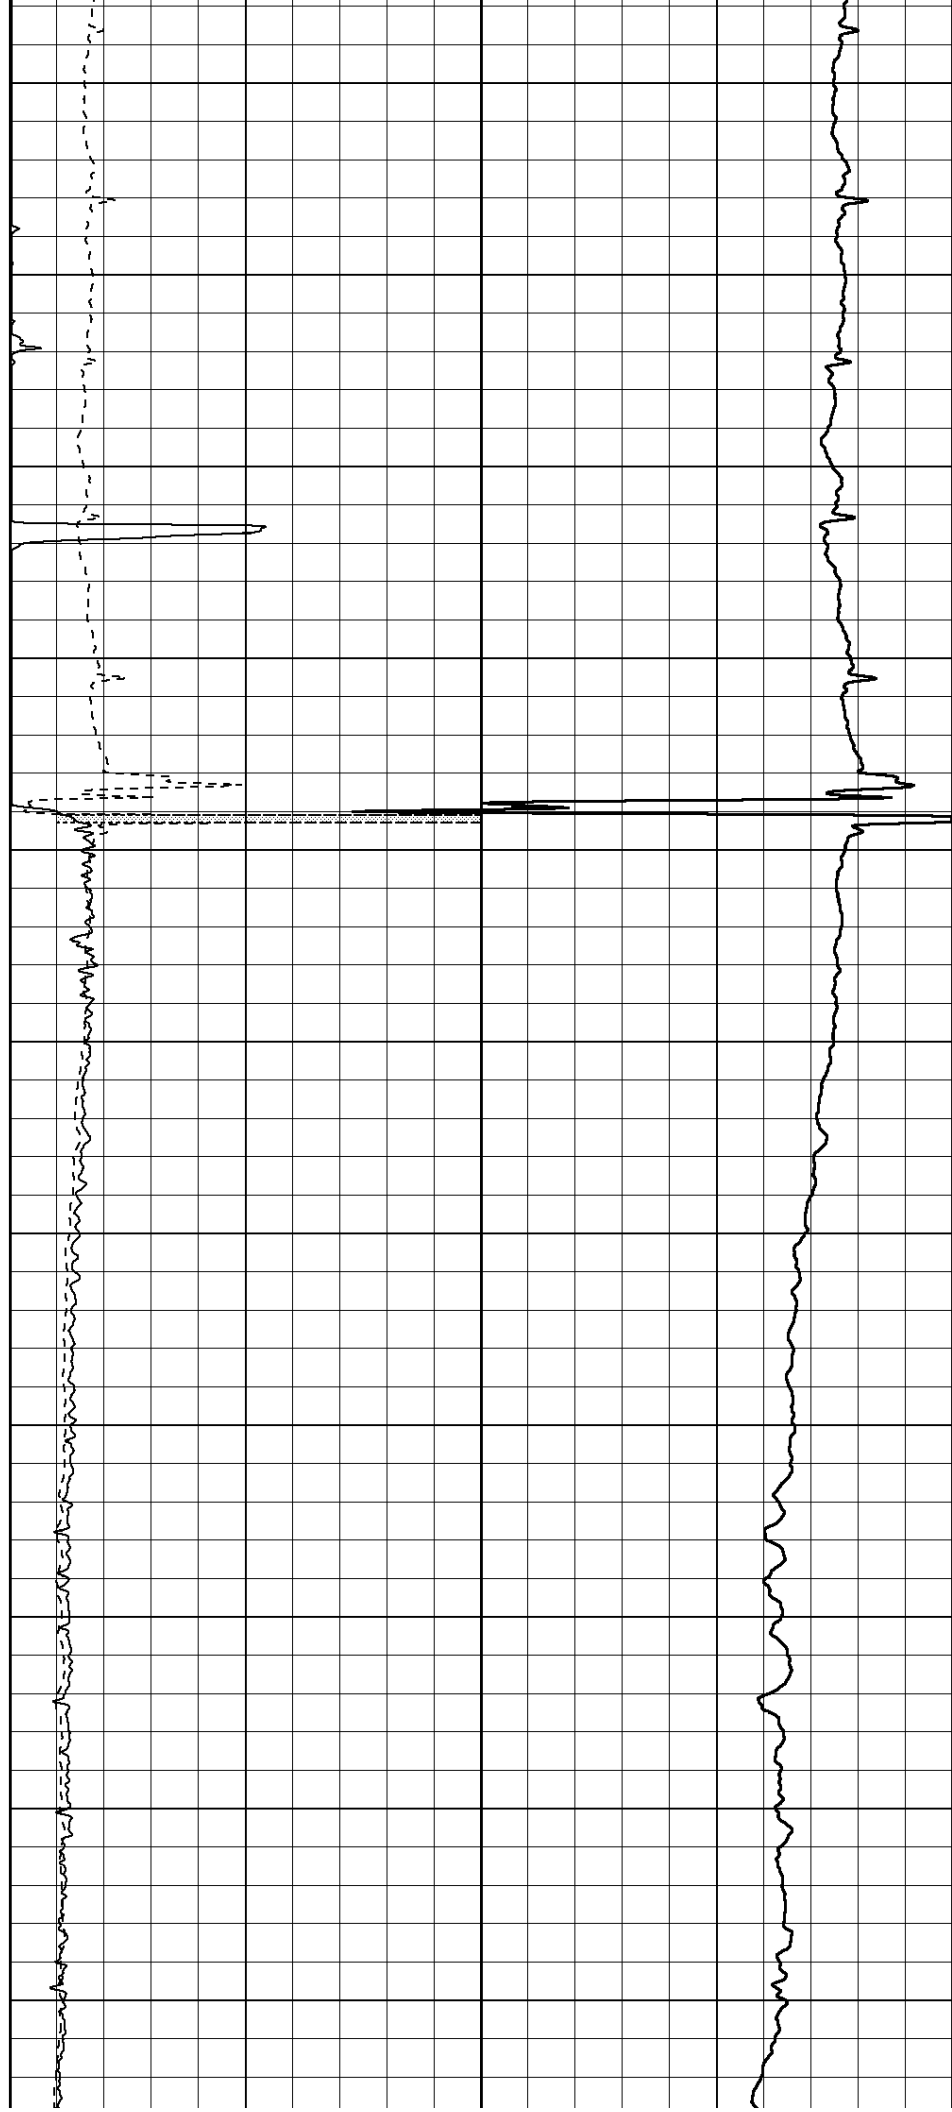

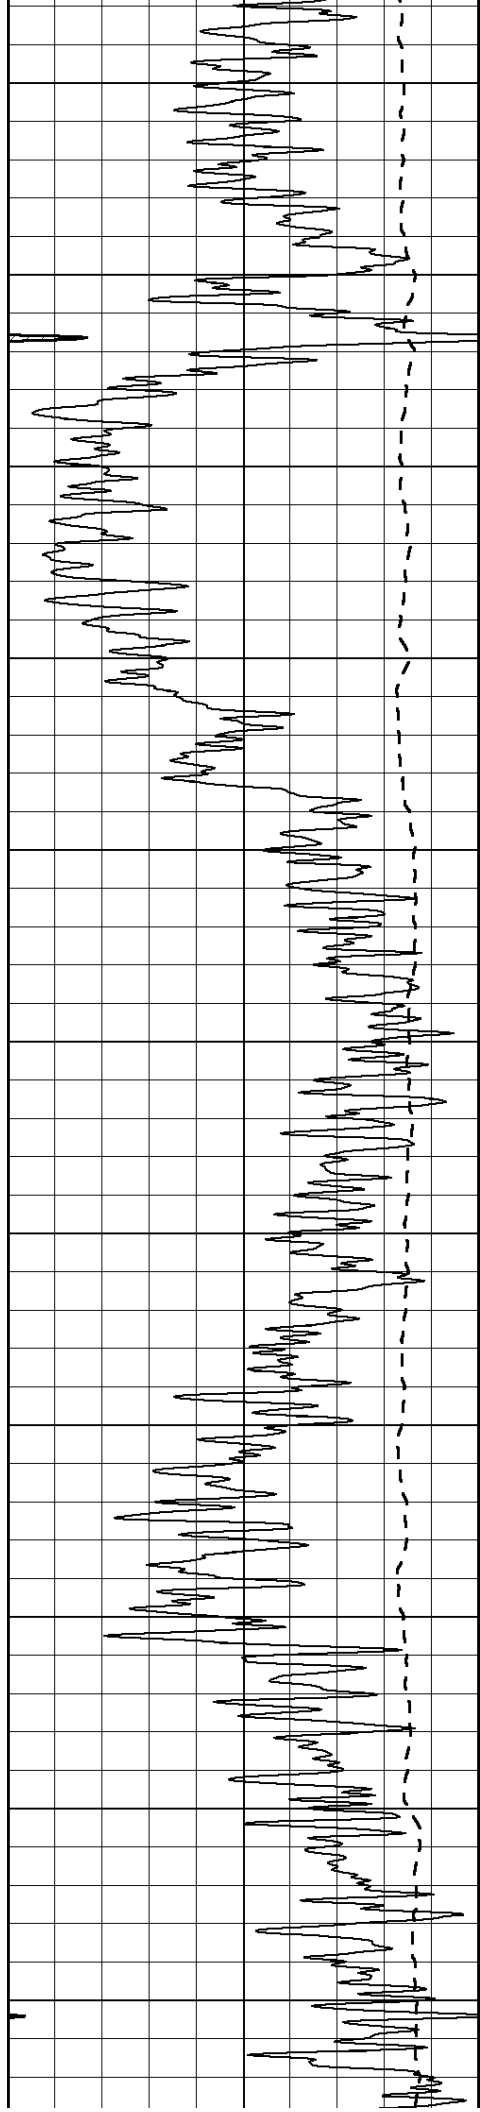

1000

1050

1100

1150

1200

1250


1300


1350

1400



1450


1500

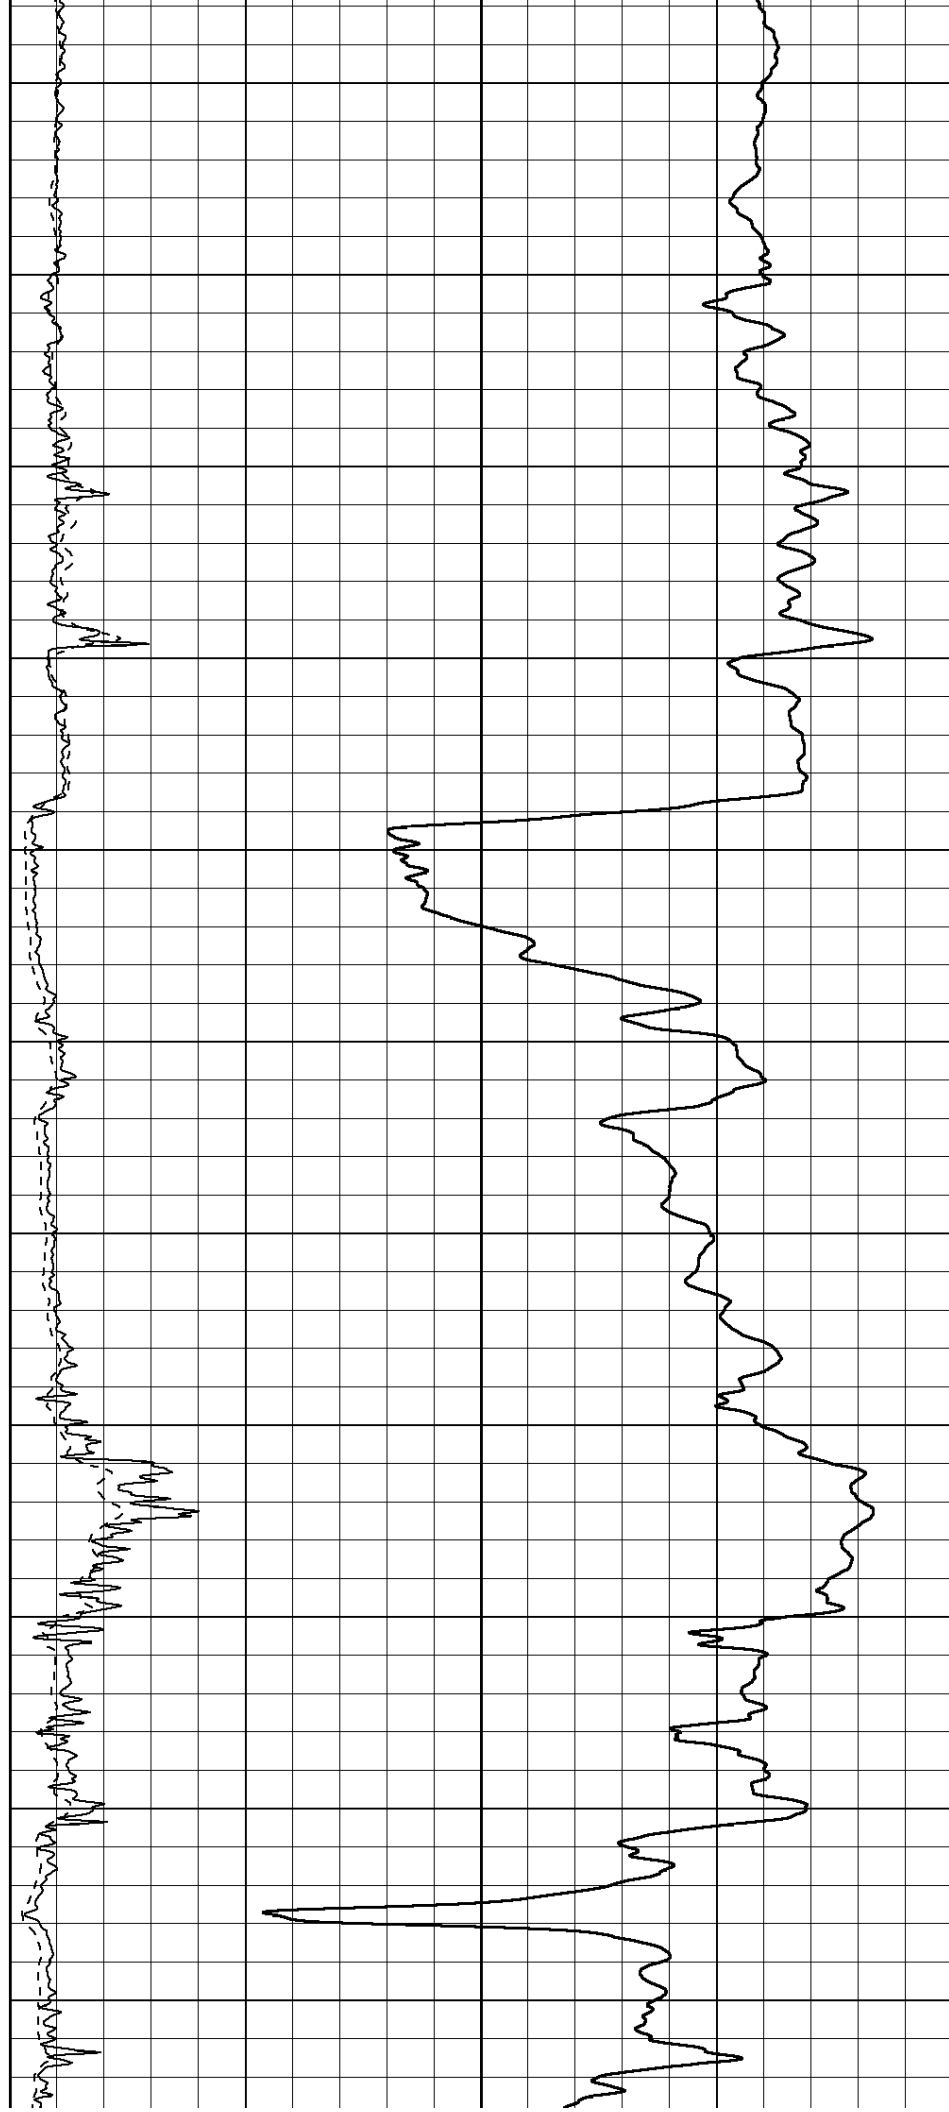

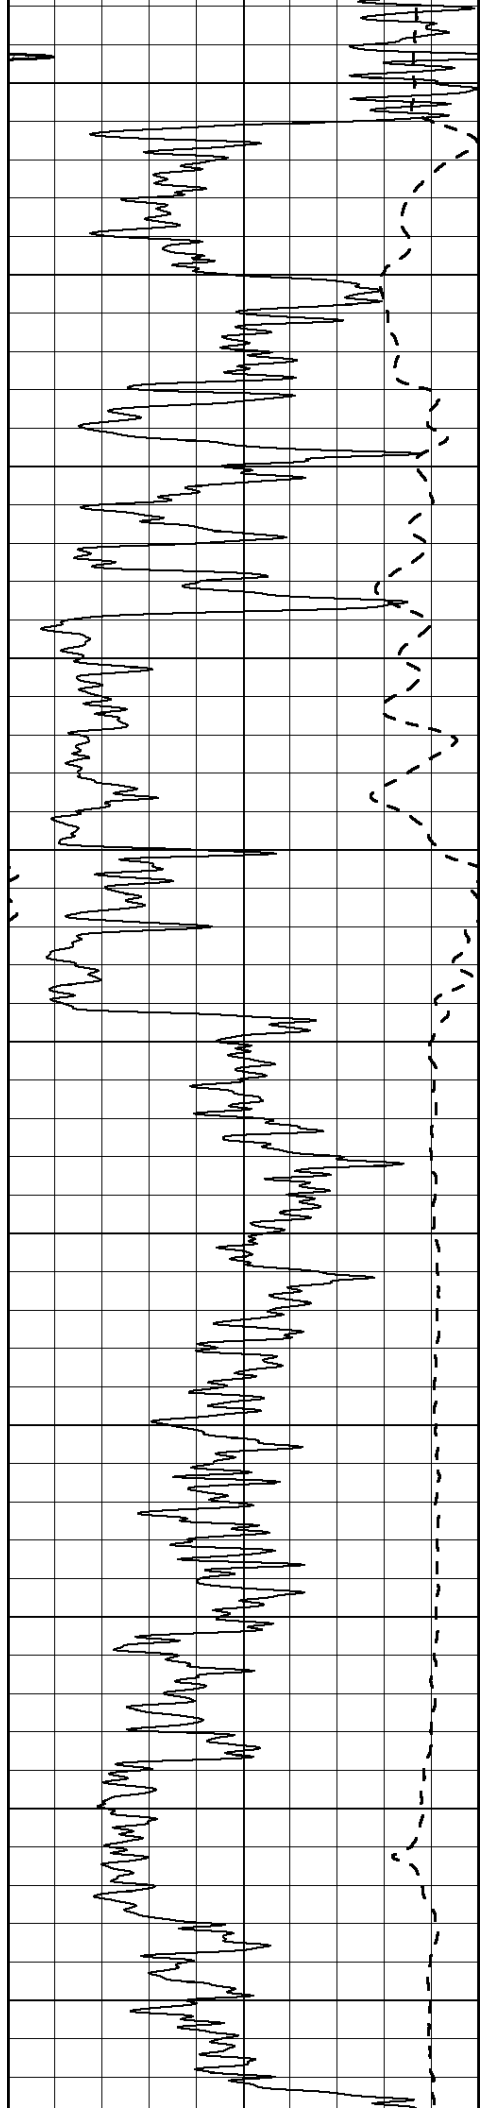

1550  
1600  
1650  
1700  
1750  
1800  
1850  
1900  
1950  
2000  
2050

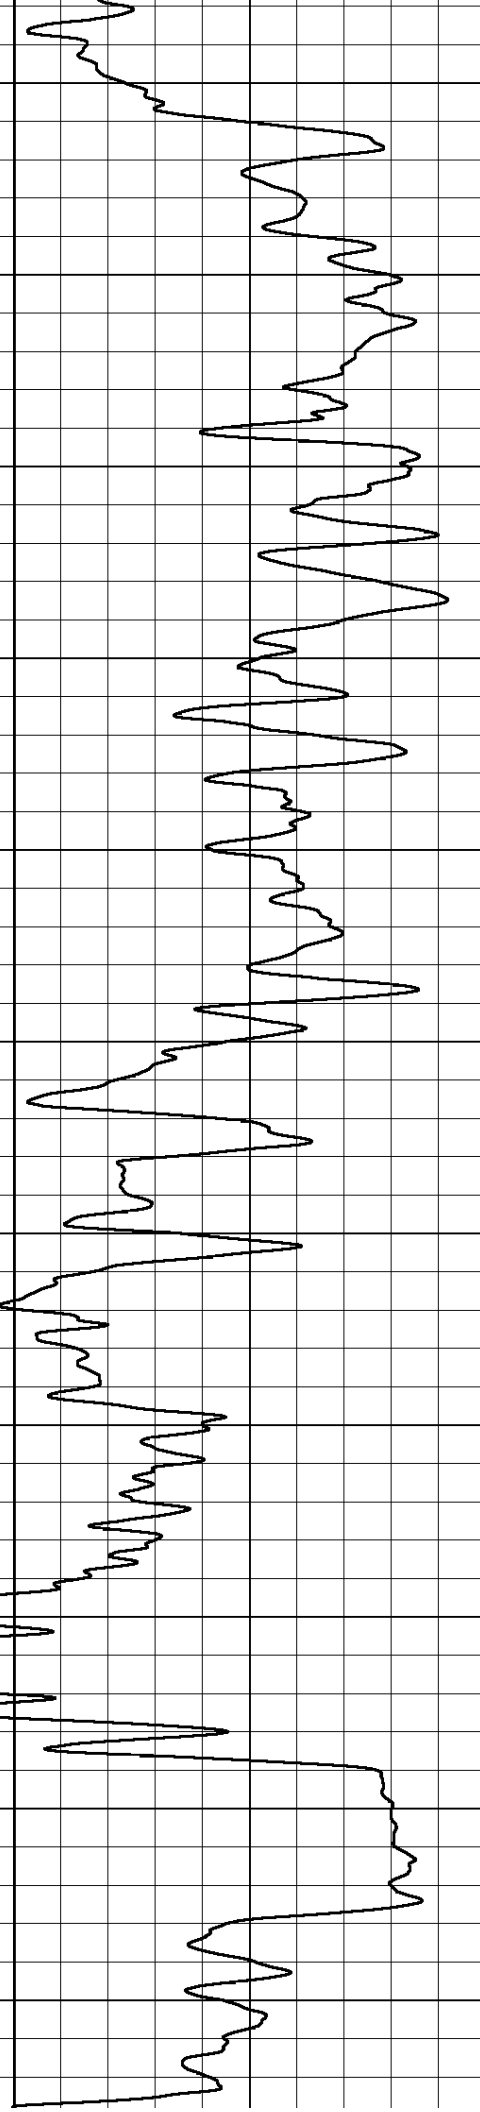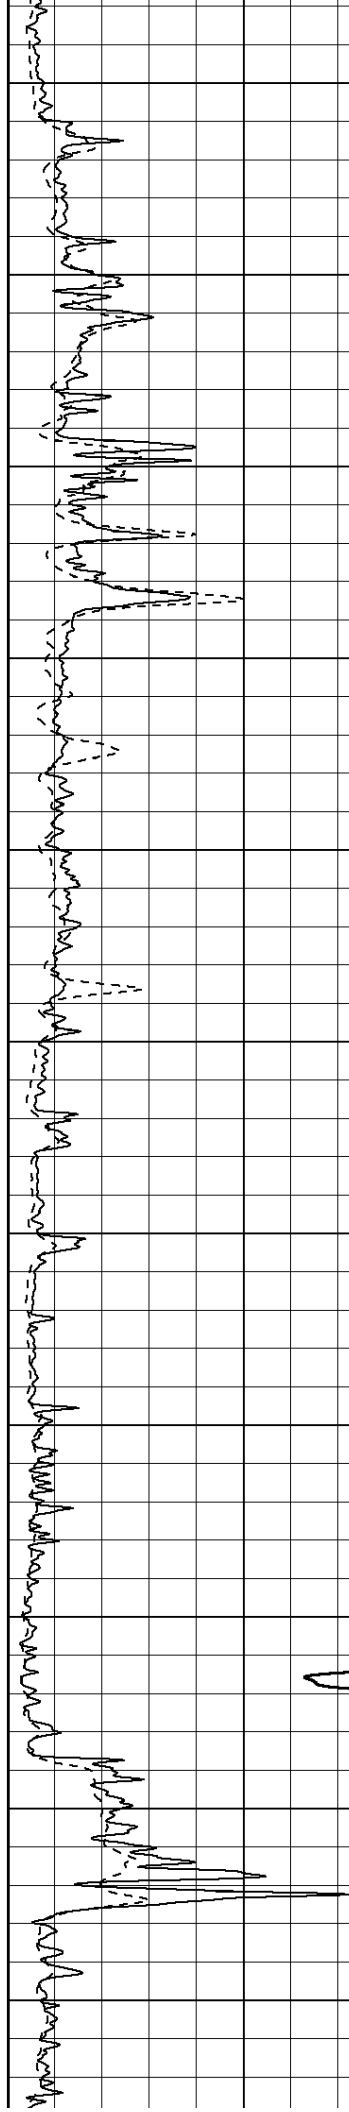

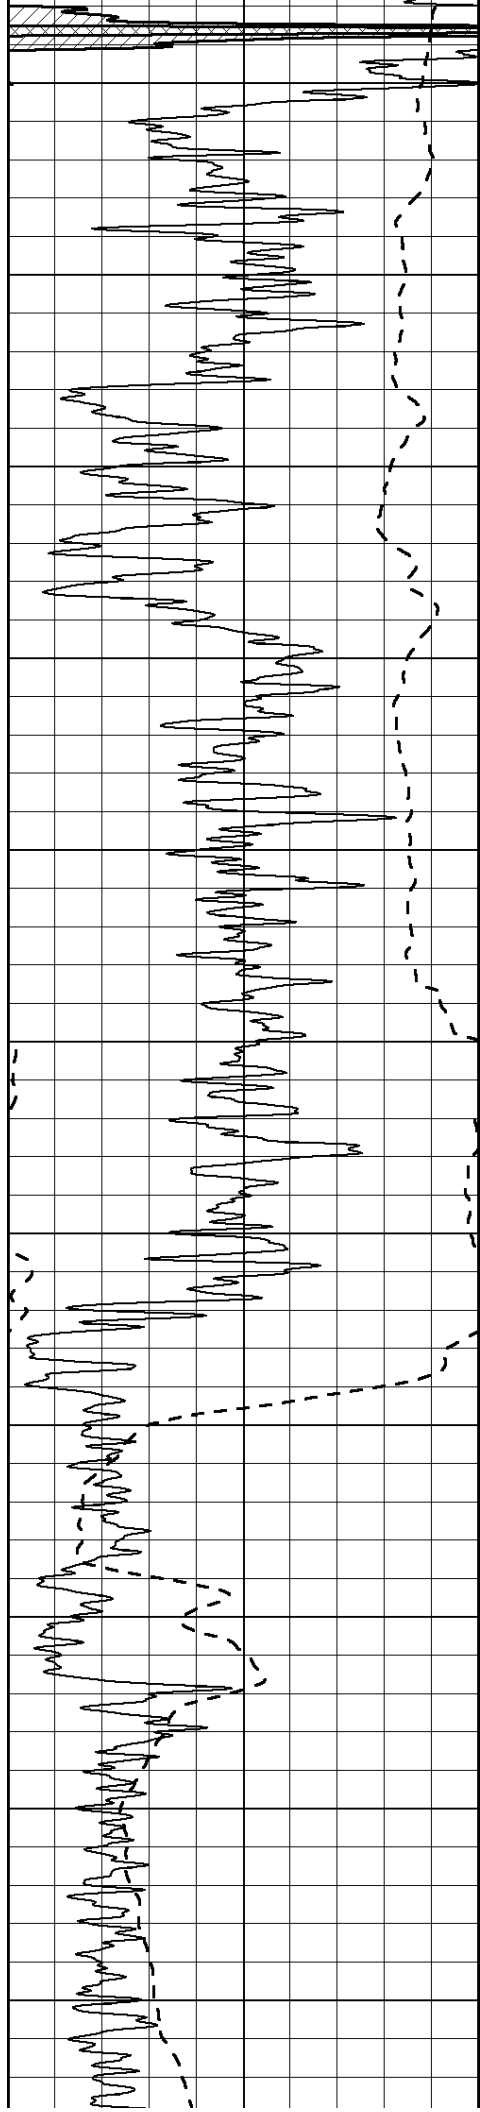

2100

2150

2200

2250

2300

2350



2400


2450

2500

2550

2600

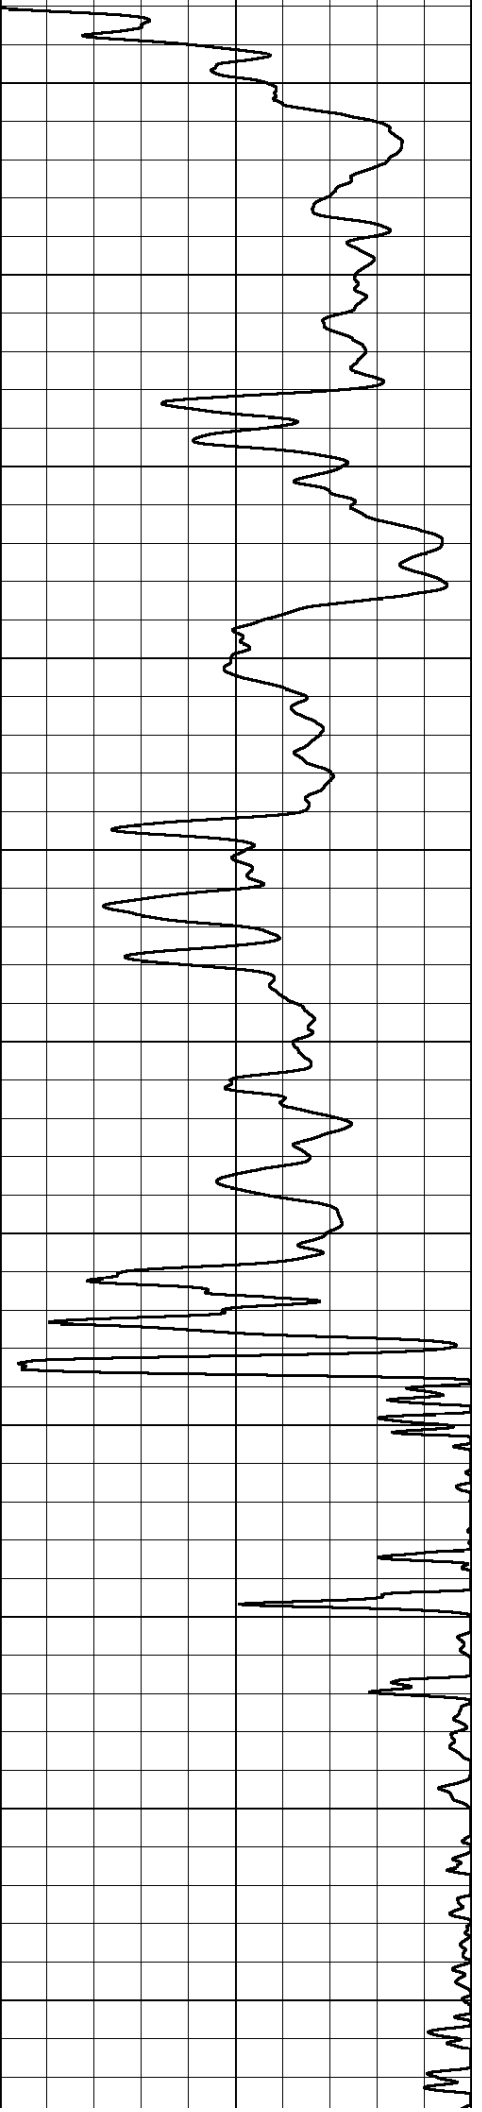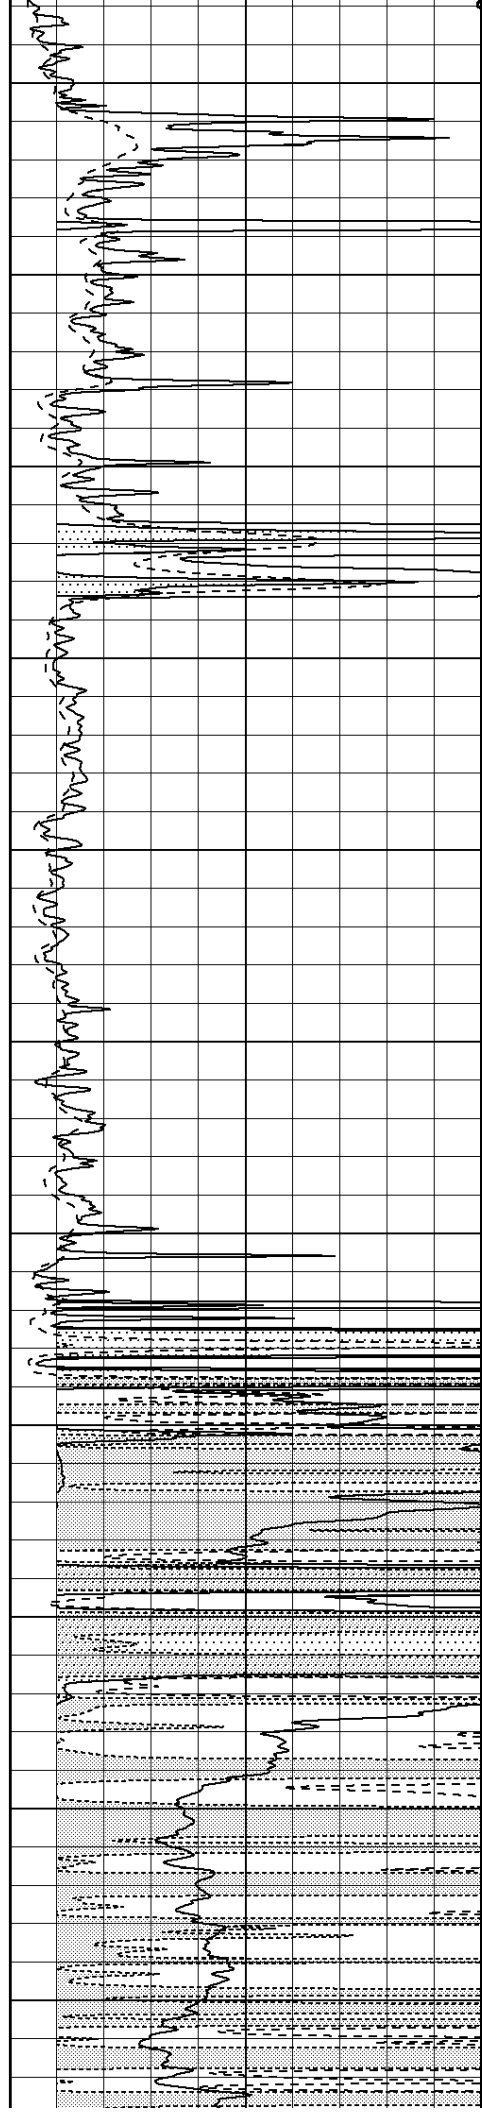

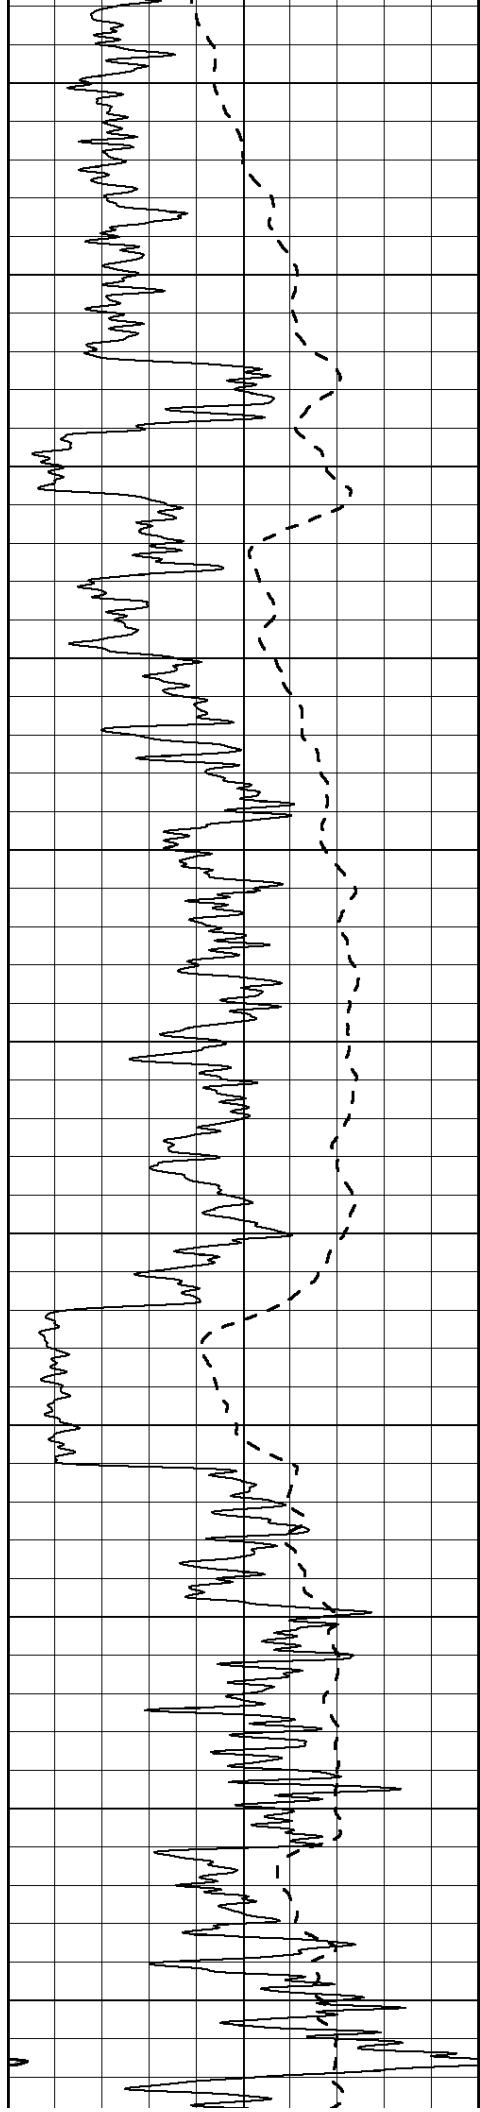

2650

2700

2750

2800

2850

2900



2950


3000

3050

3100

3150

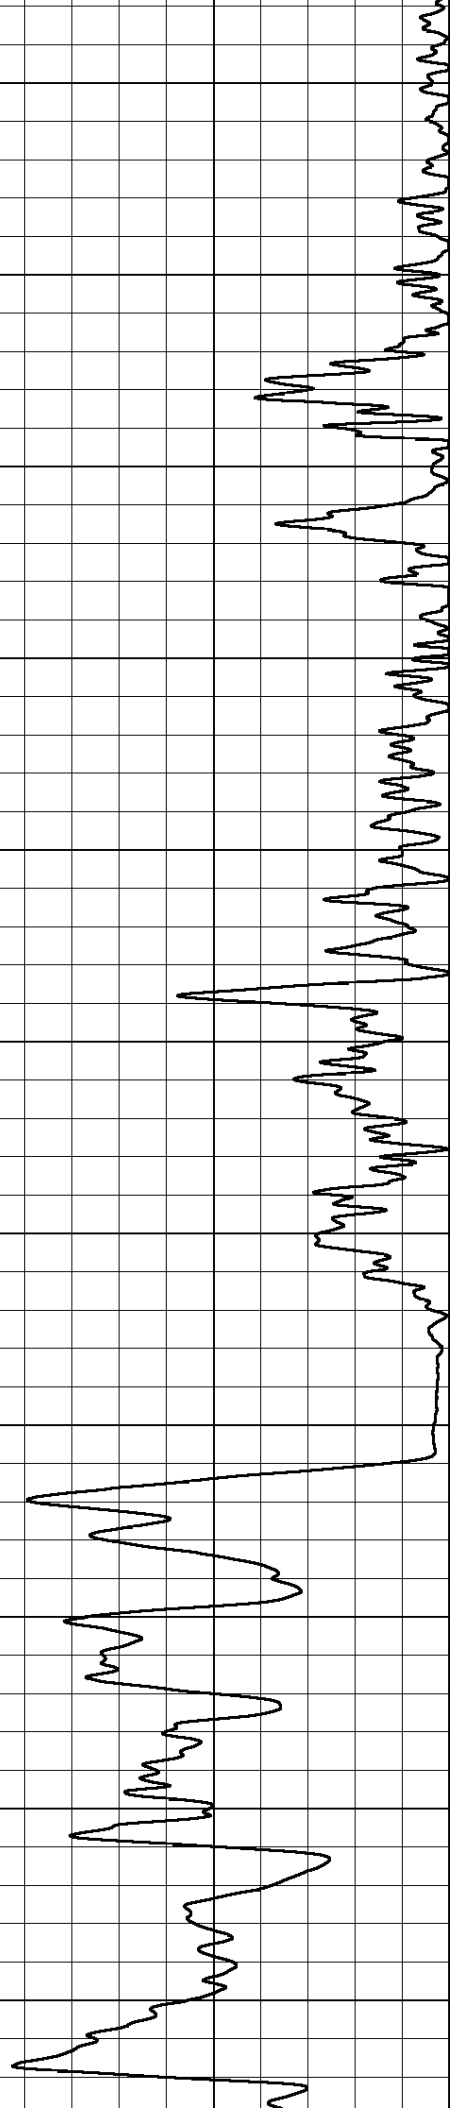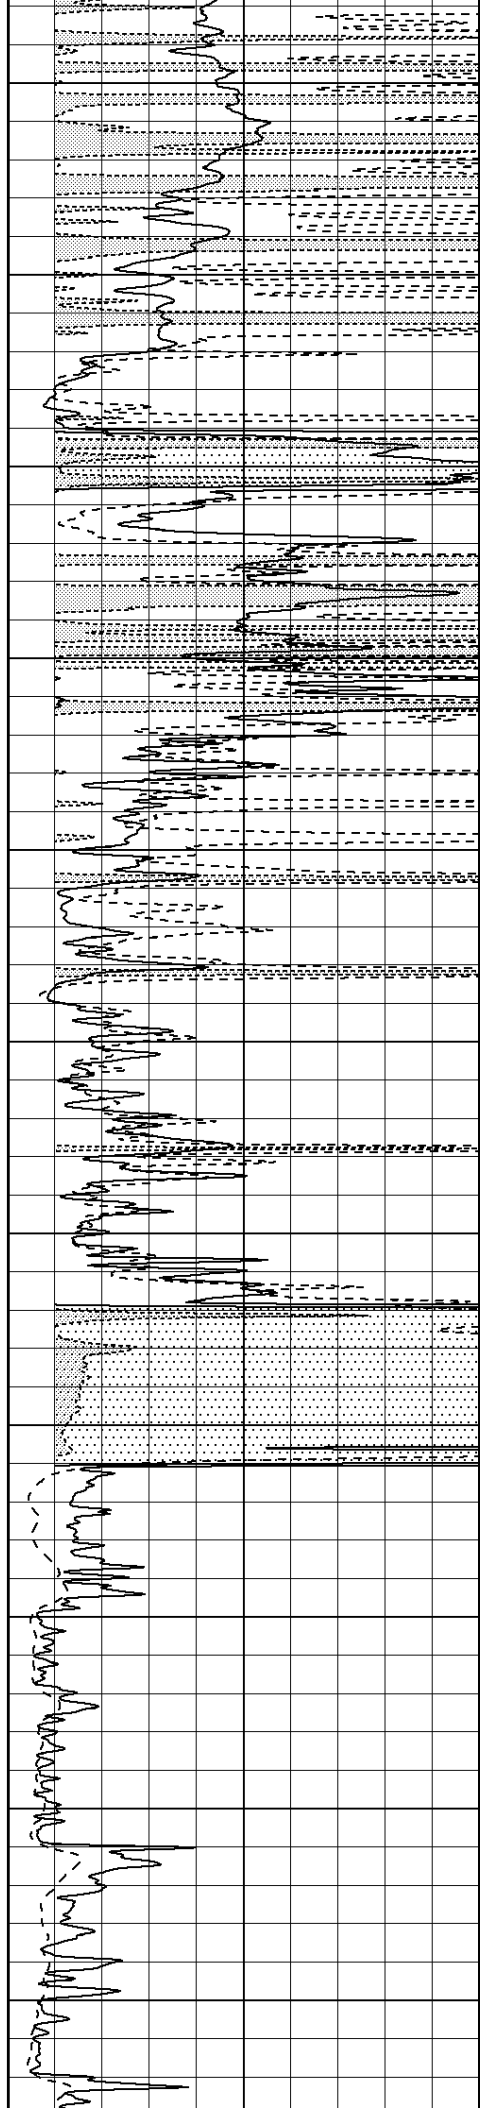

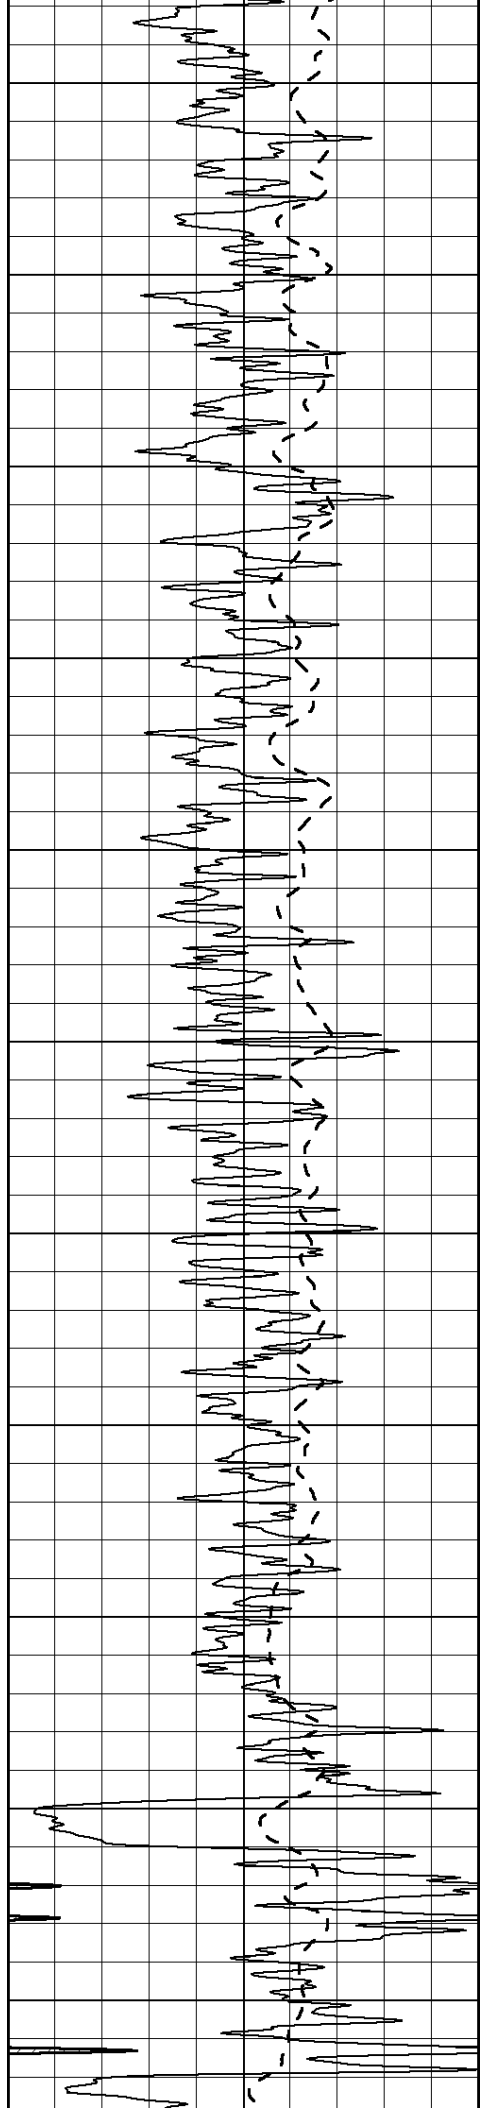

3200

3250

3300

3350

3400

3450



3500

3550


3600

3650

3700

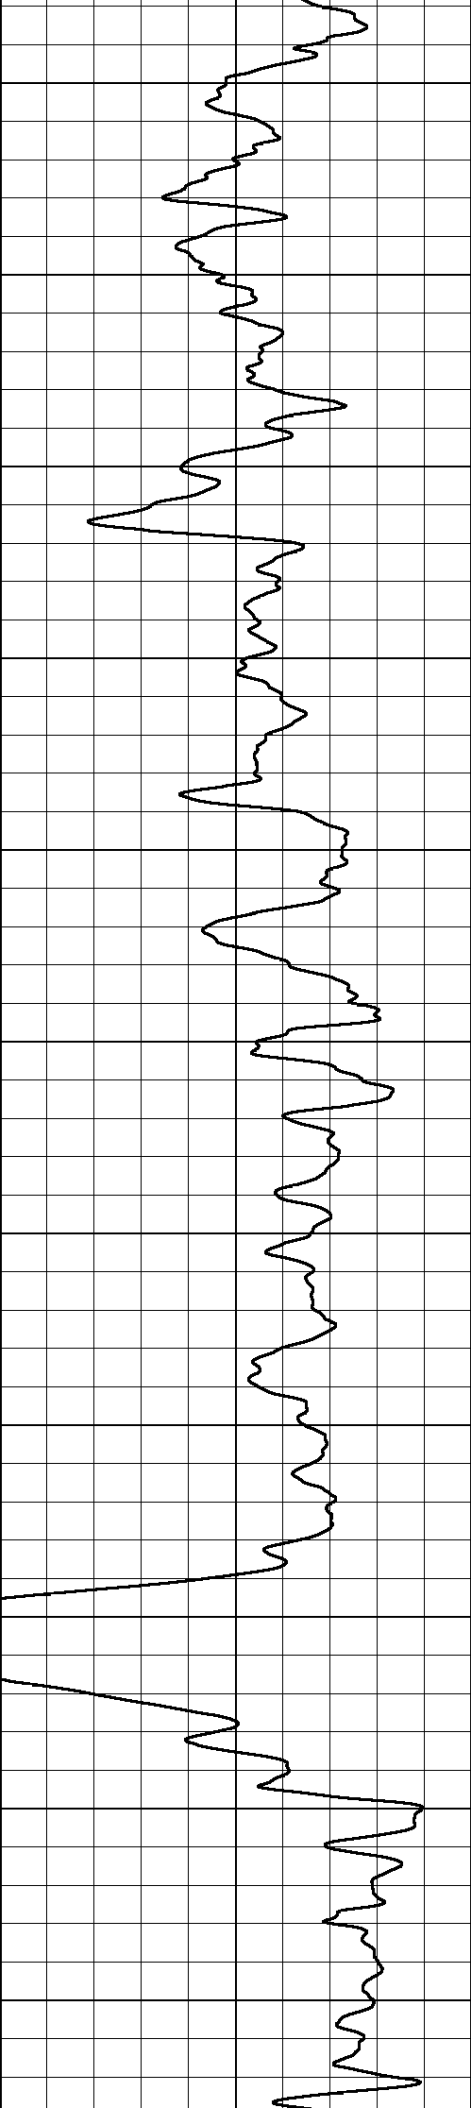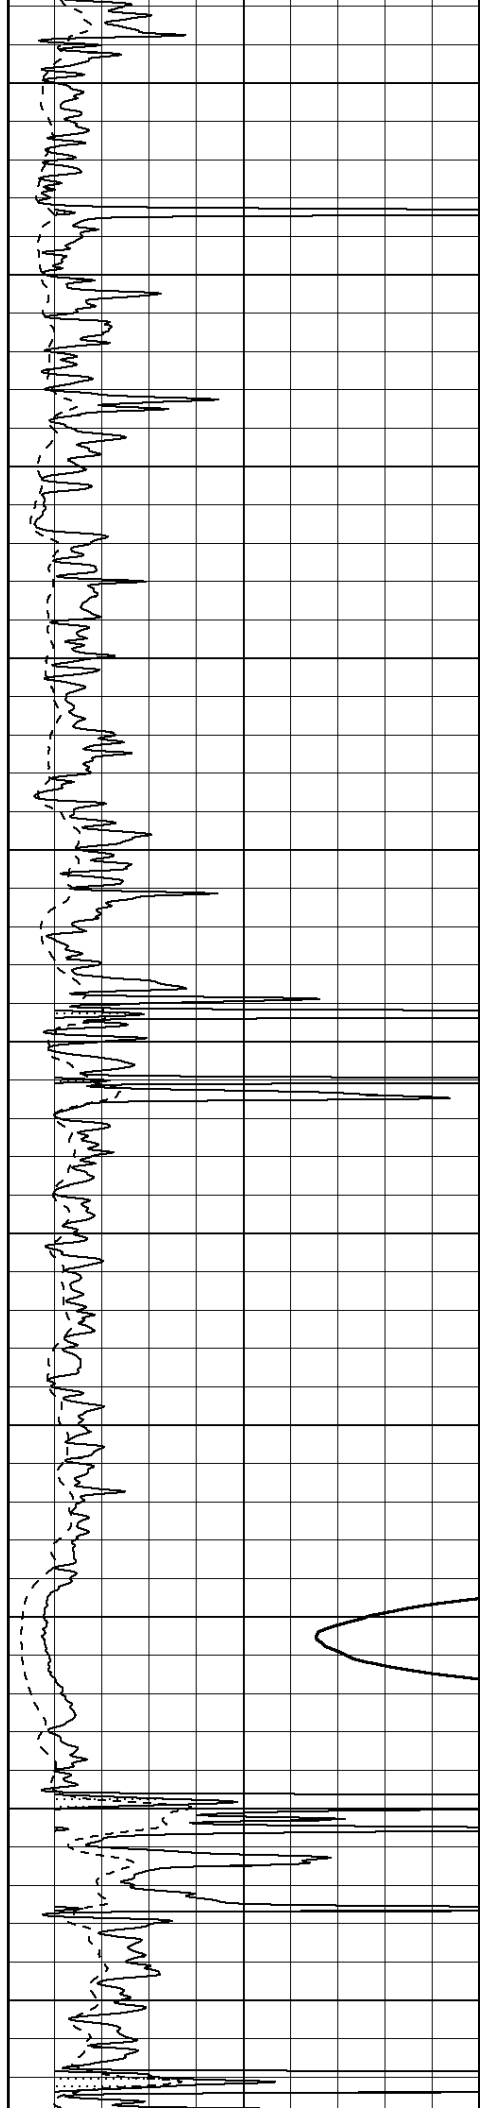



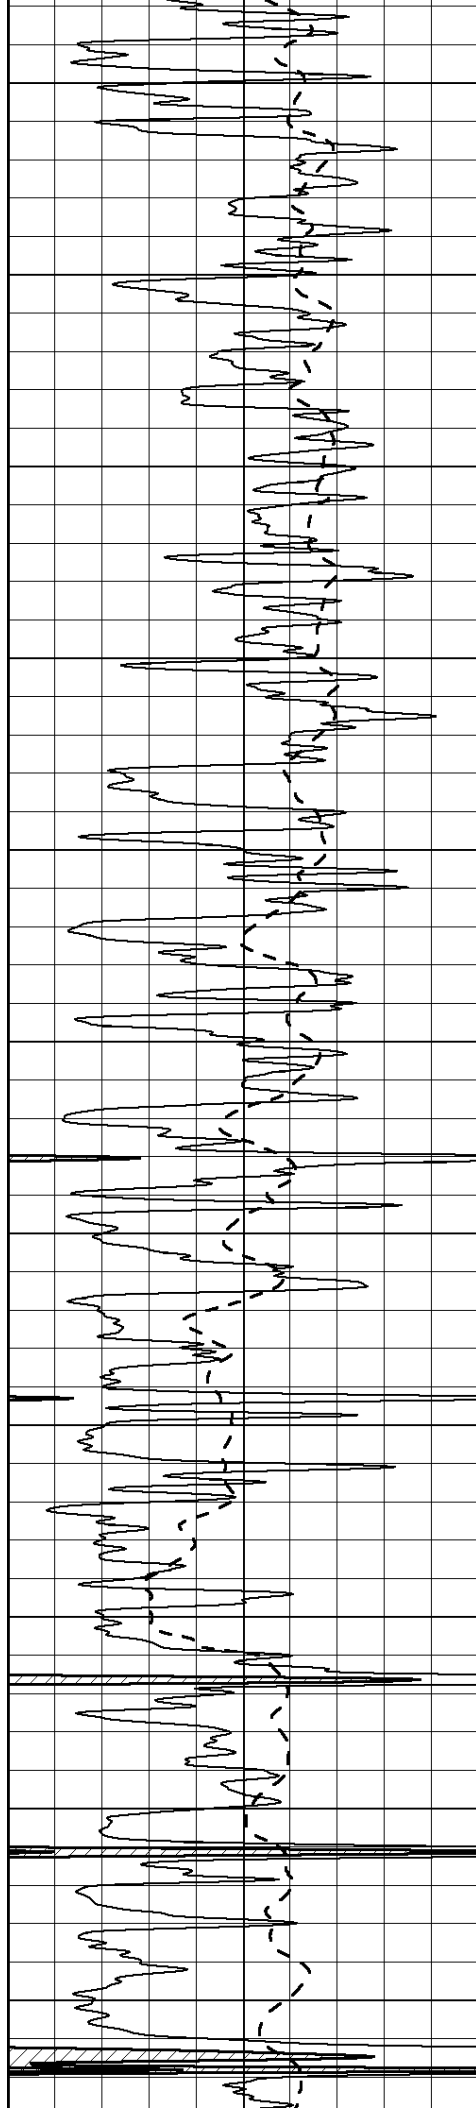

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

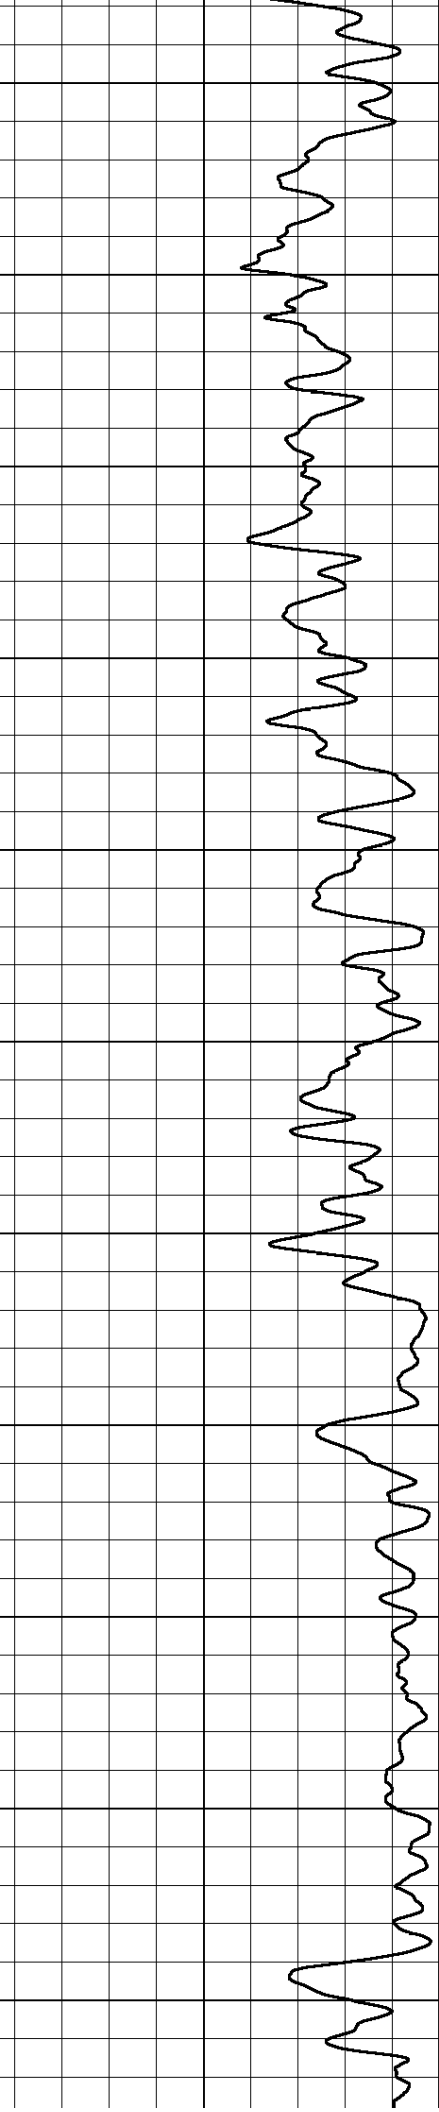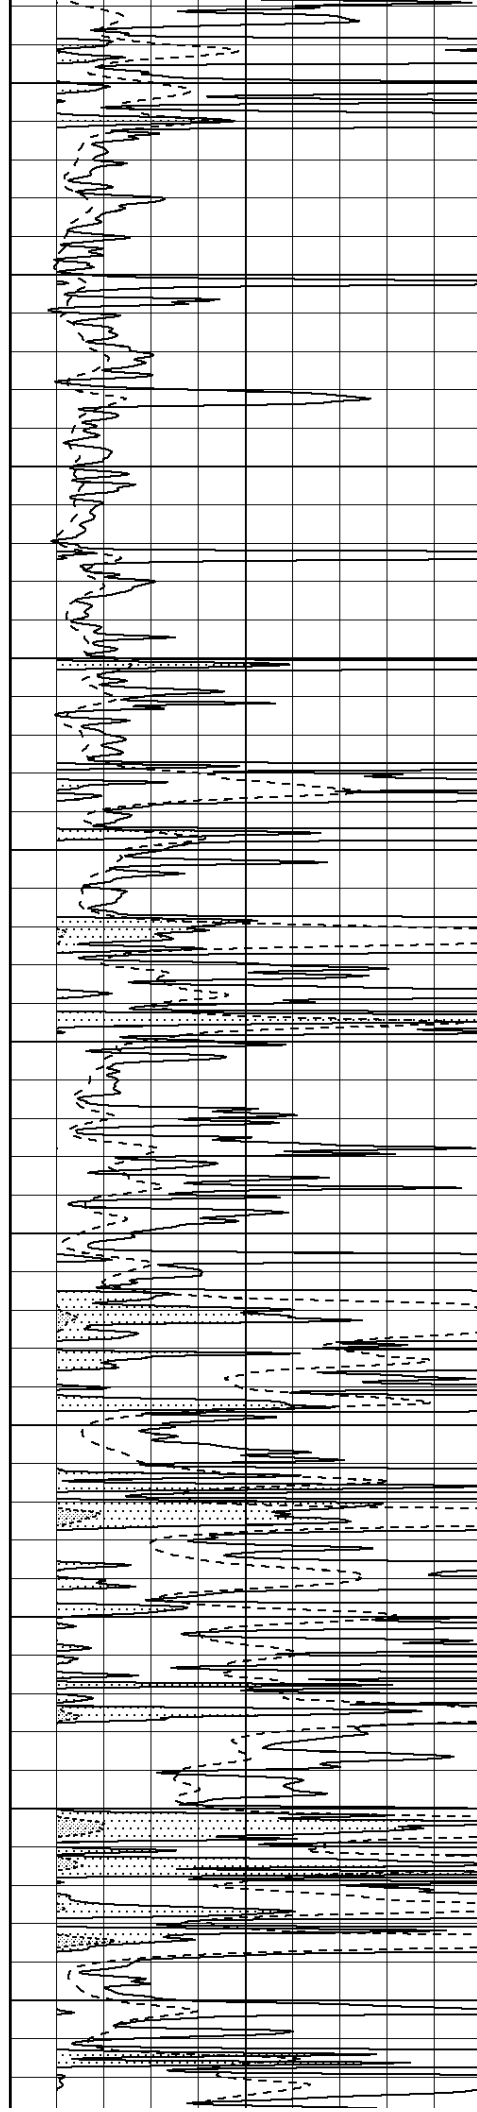

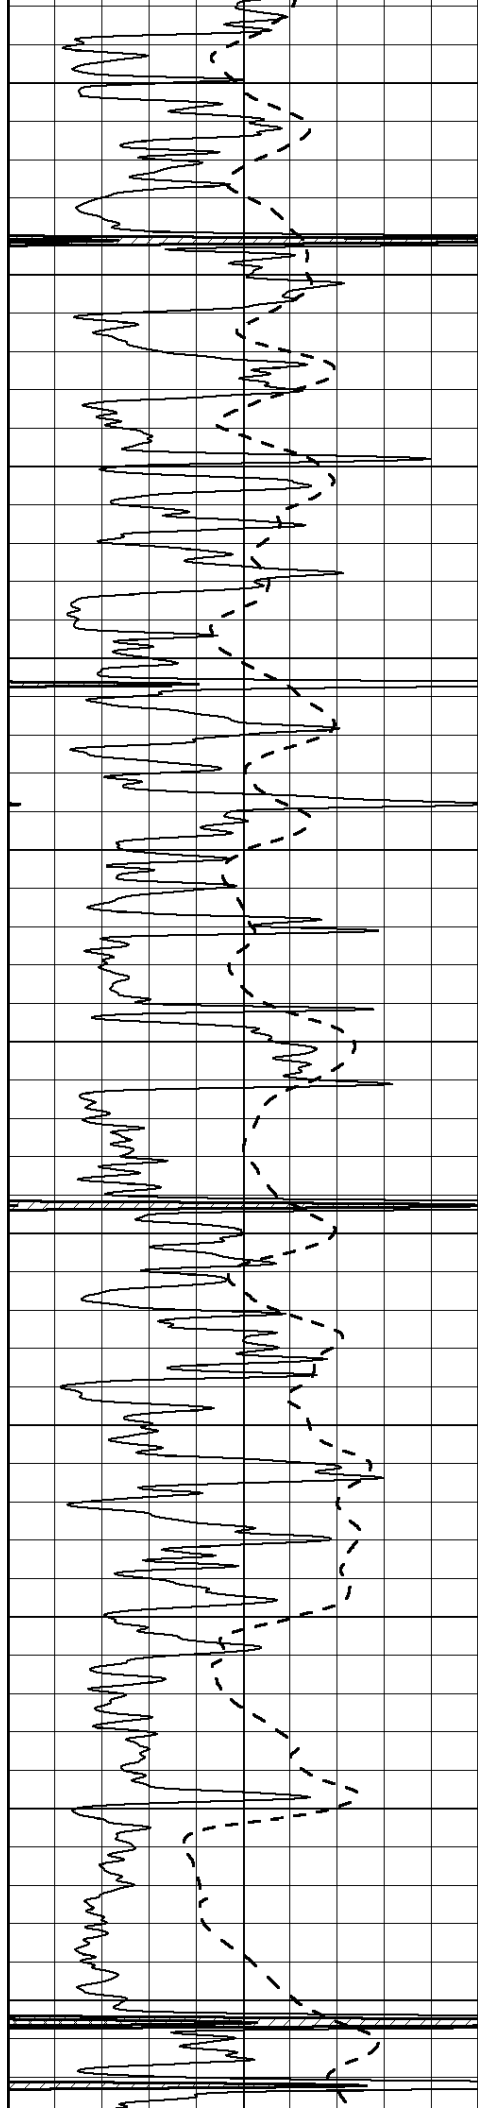

4300

4350

4400

4450

4500

4550



4600


4650

4700

4750

4800

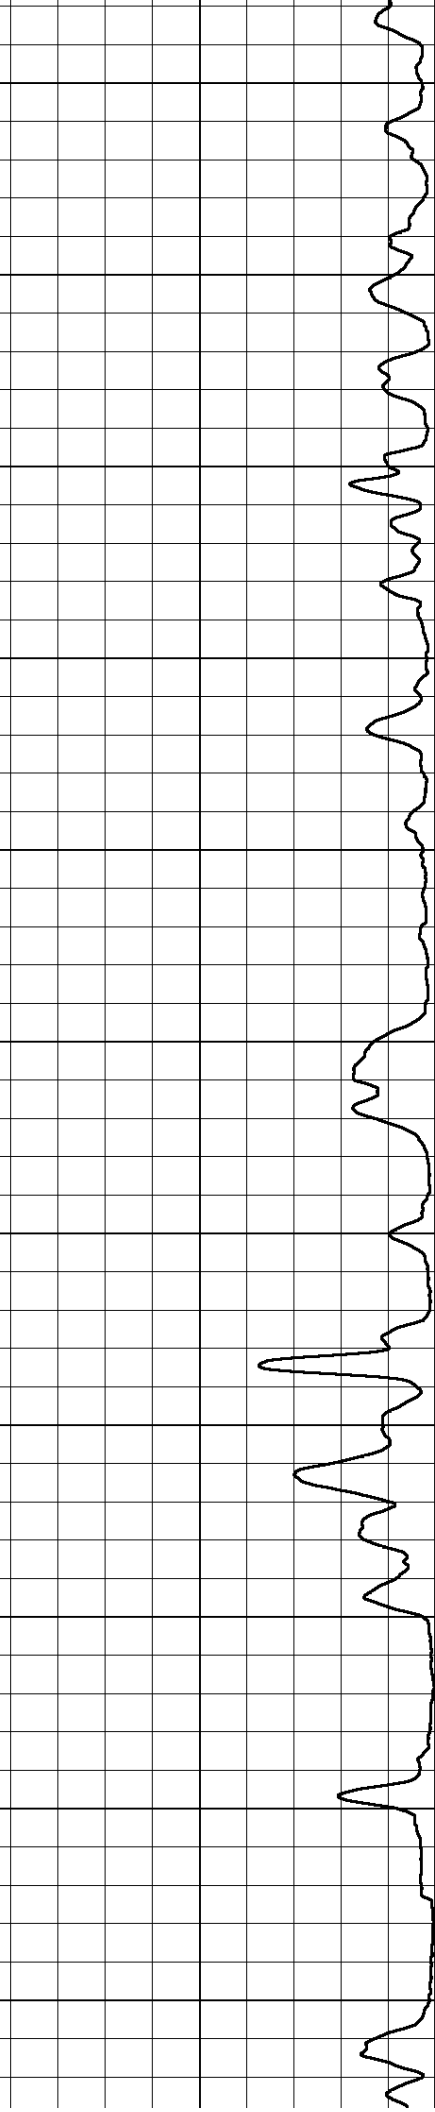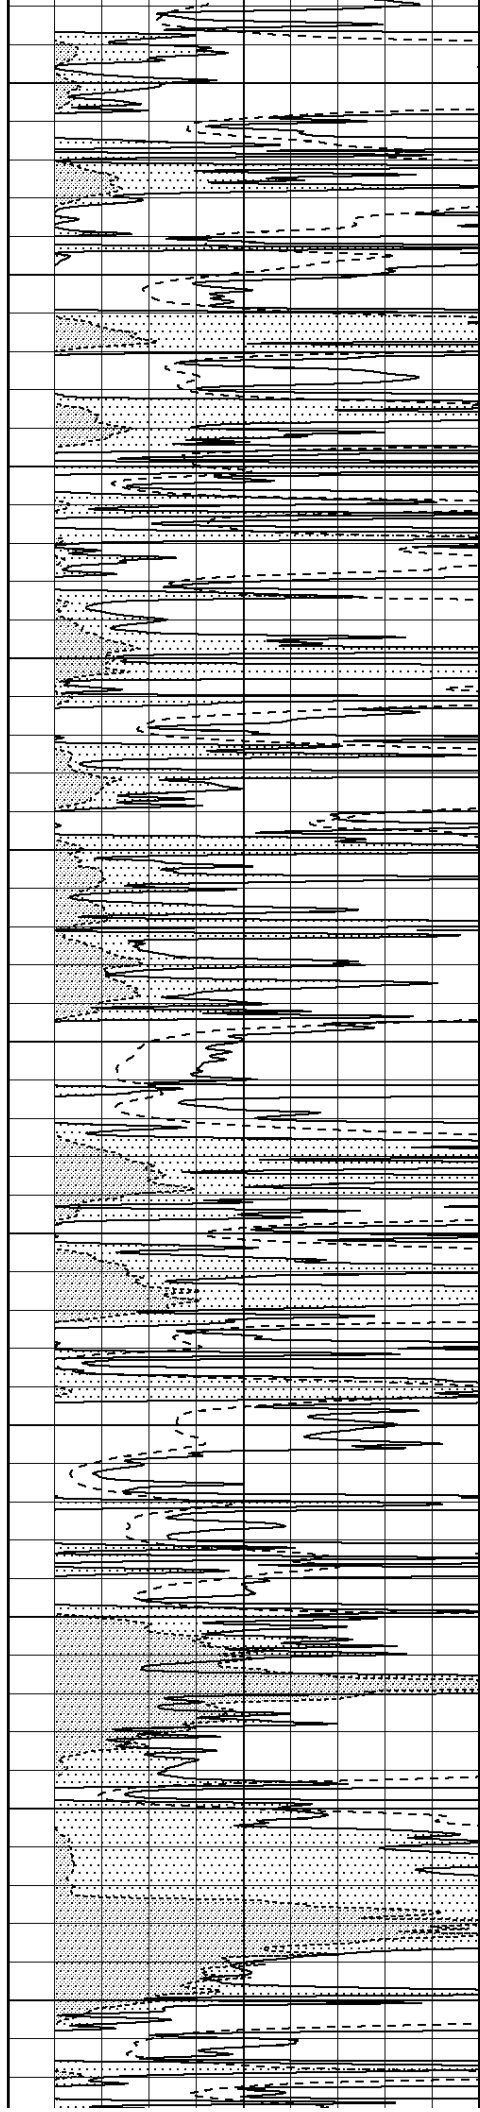

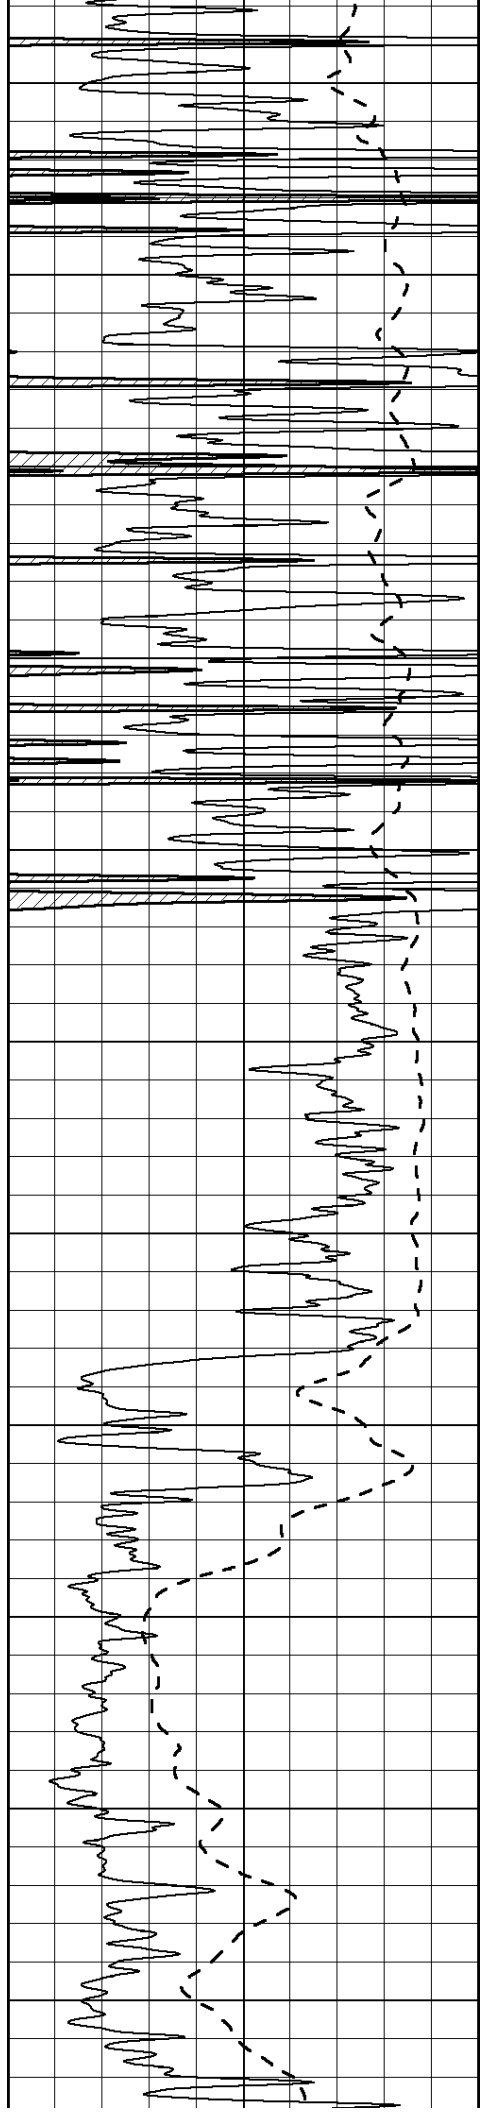

4850

4900

4950

5000

5050

5100



5150


5200

5250

5300

5350

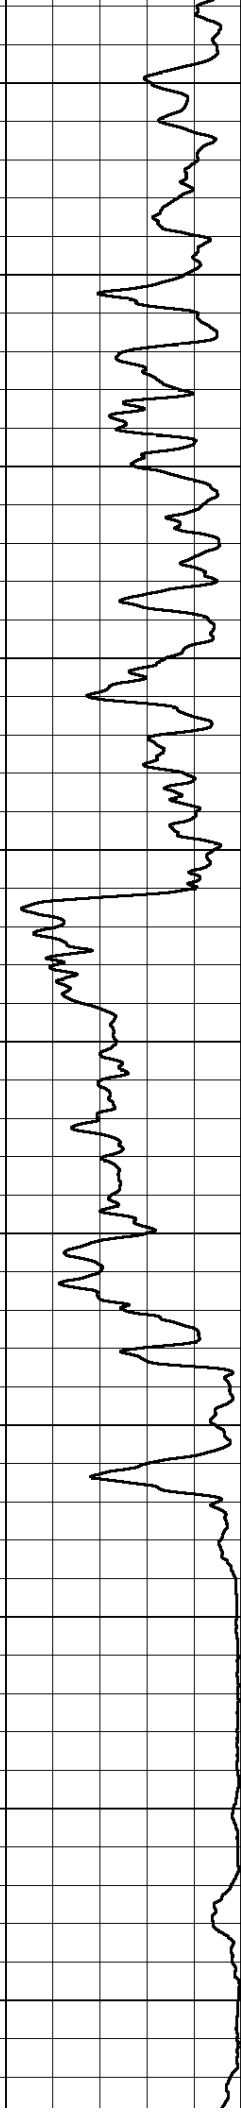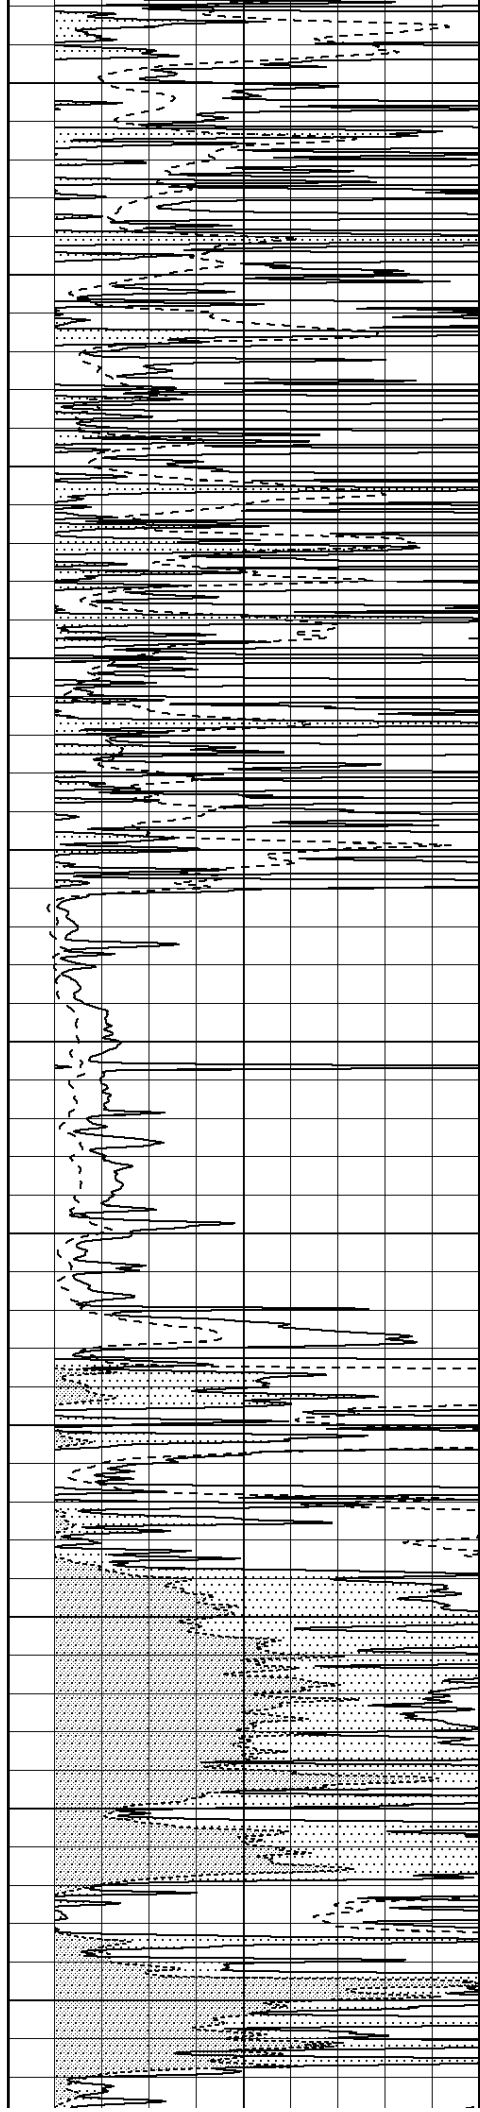


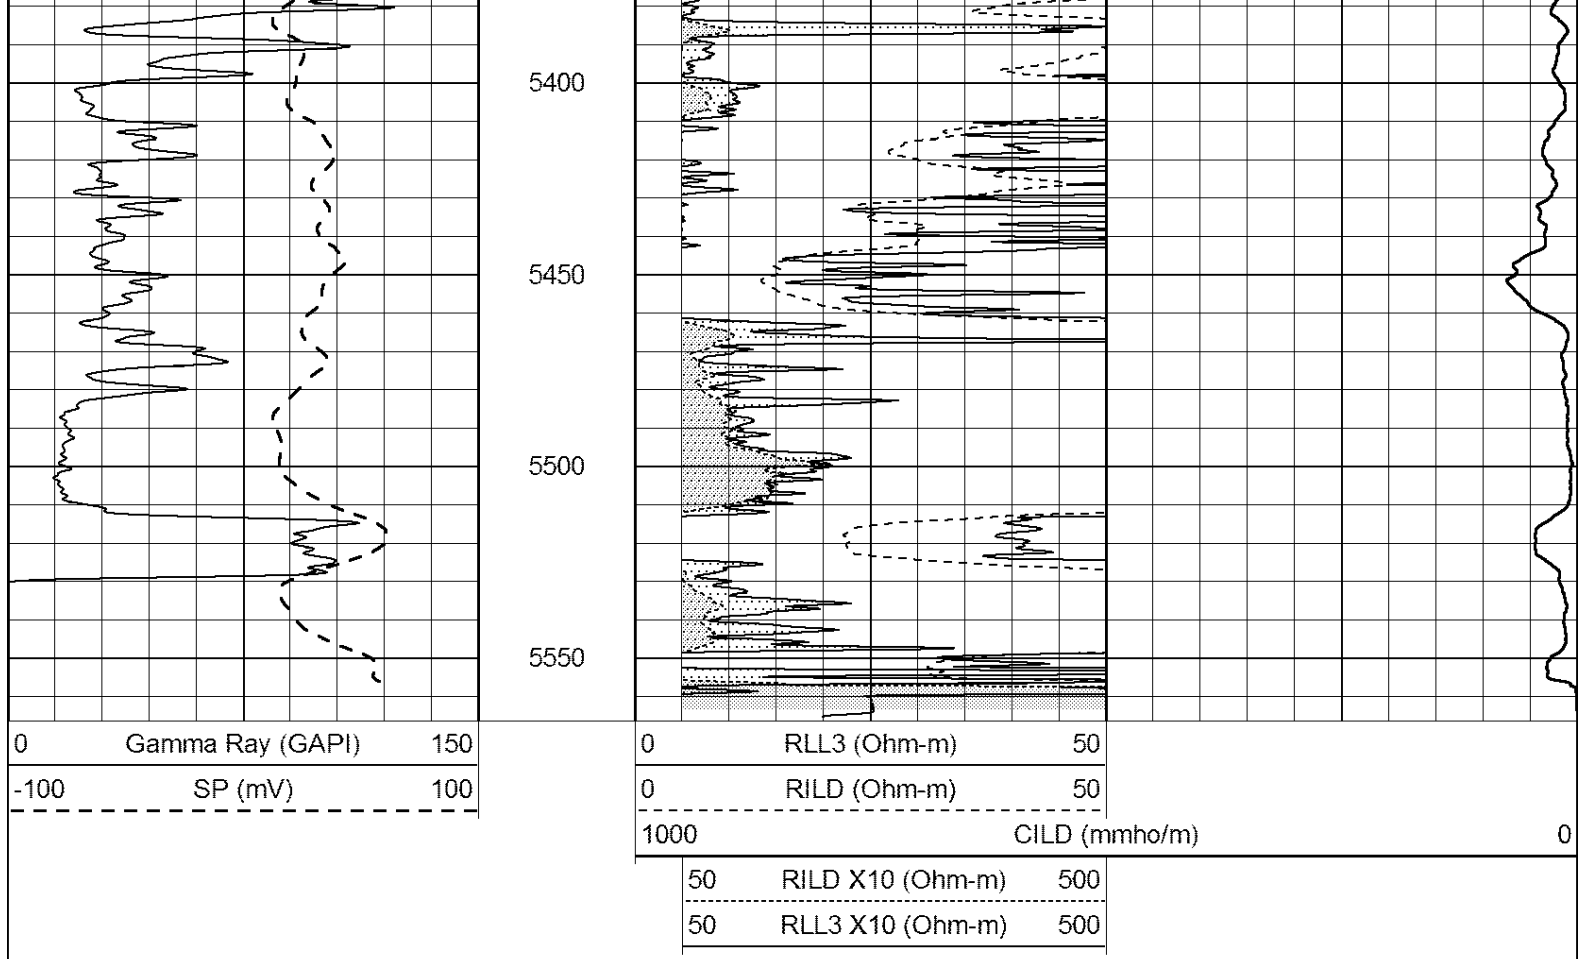


# ANHYDRITE

Database File: 22117pe.db  
 Dataset Pathname: pass3.2  
 Presentation Format: \_dil  
 Dataset Creation: Sun Jan 05 14:07:55 2014 by Calc Open-Cased 090629  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

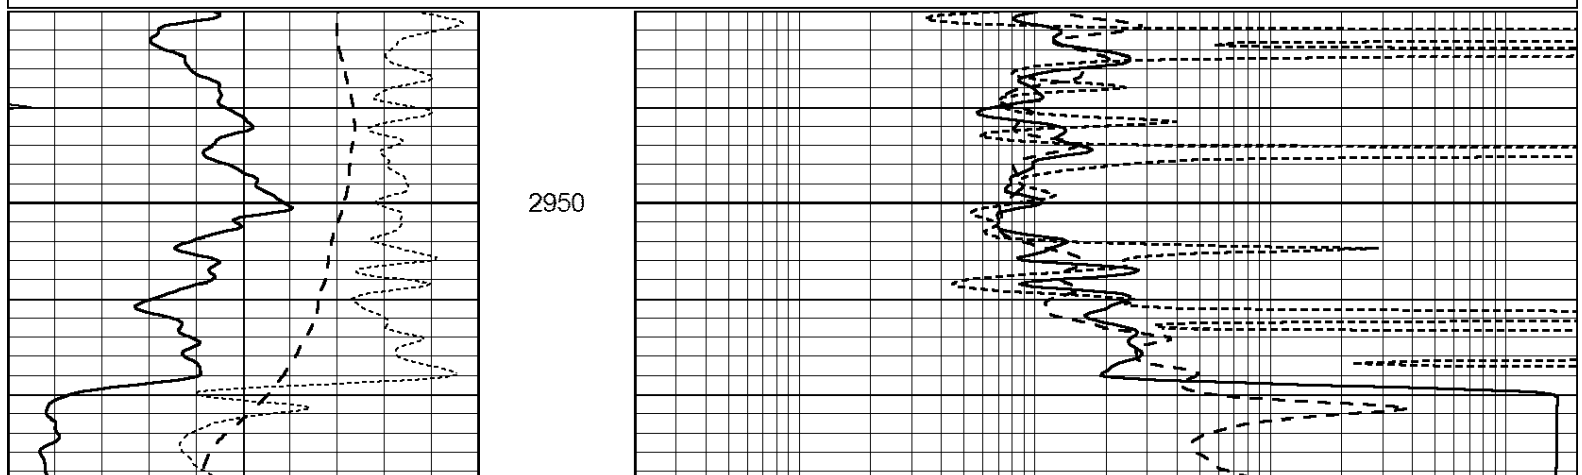

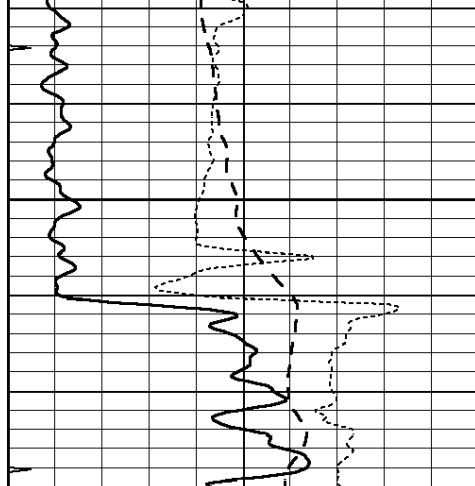

3000

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

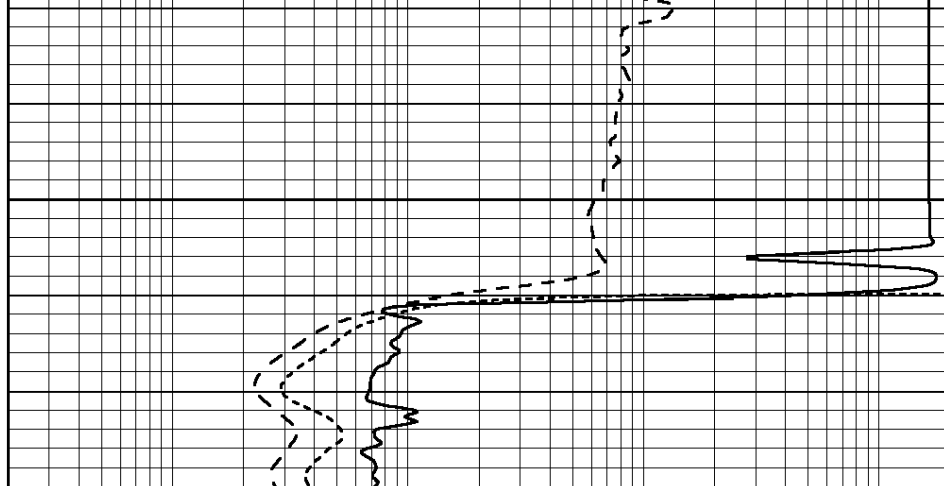

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




# MAIN SECTION

Database File: 22117pe.db  
 Dataset Pathname: pass3.1.1  
 Presentation Format: \_dil  
 Dataset Creation: Sun Jan 05 14:00:45 2014  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

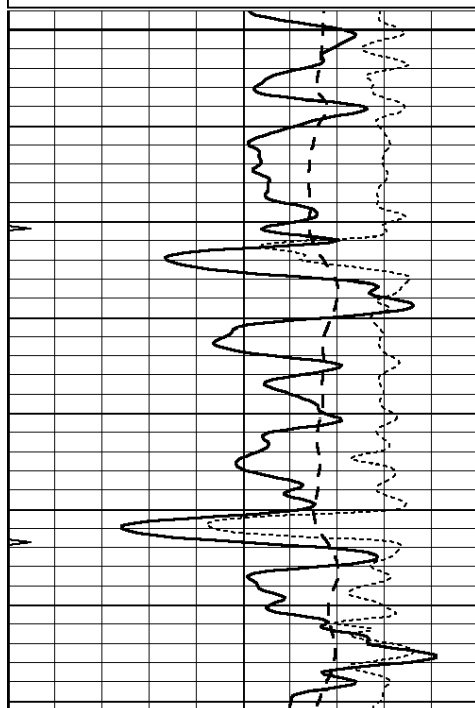

3850

3900

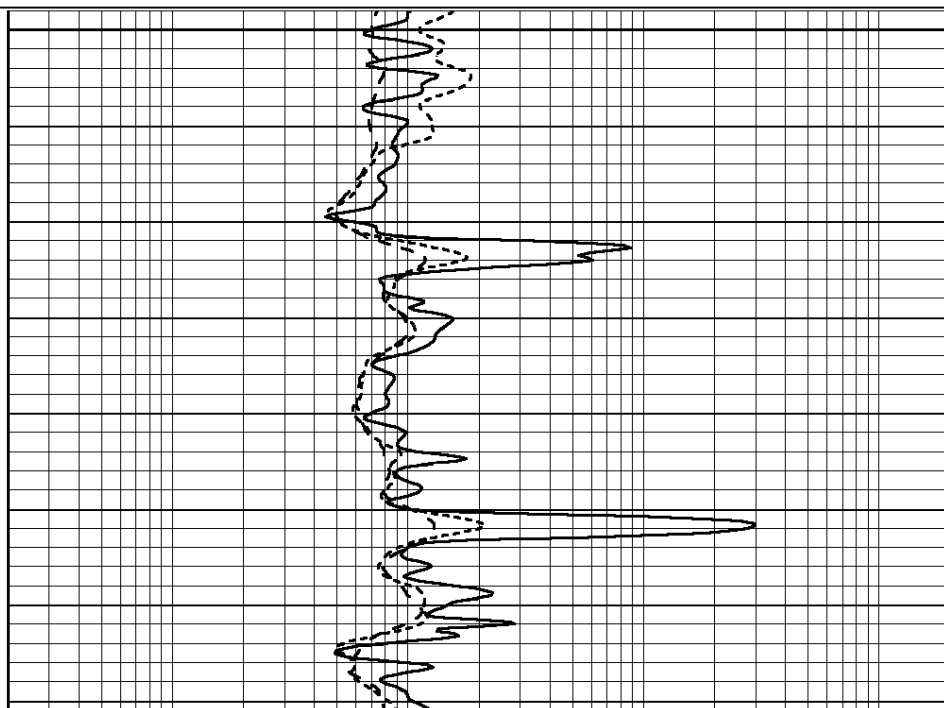

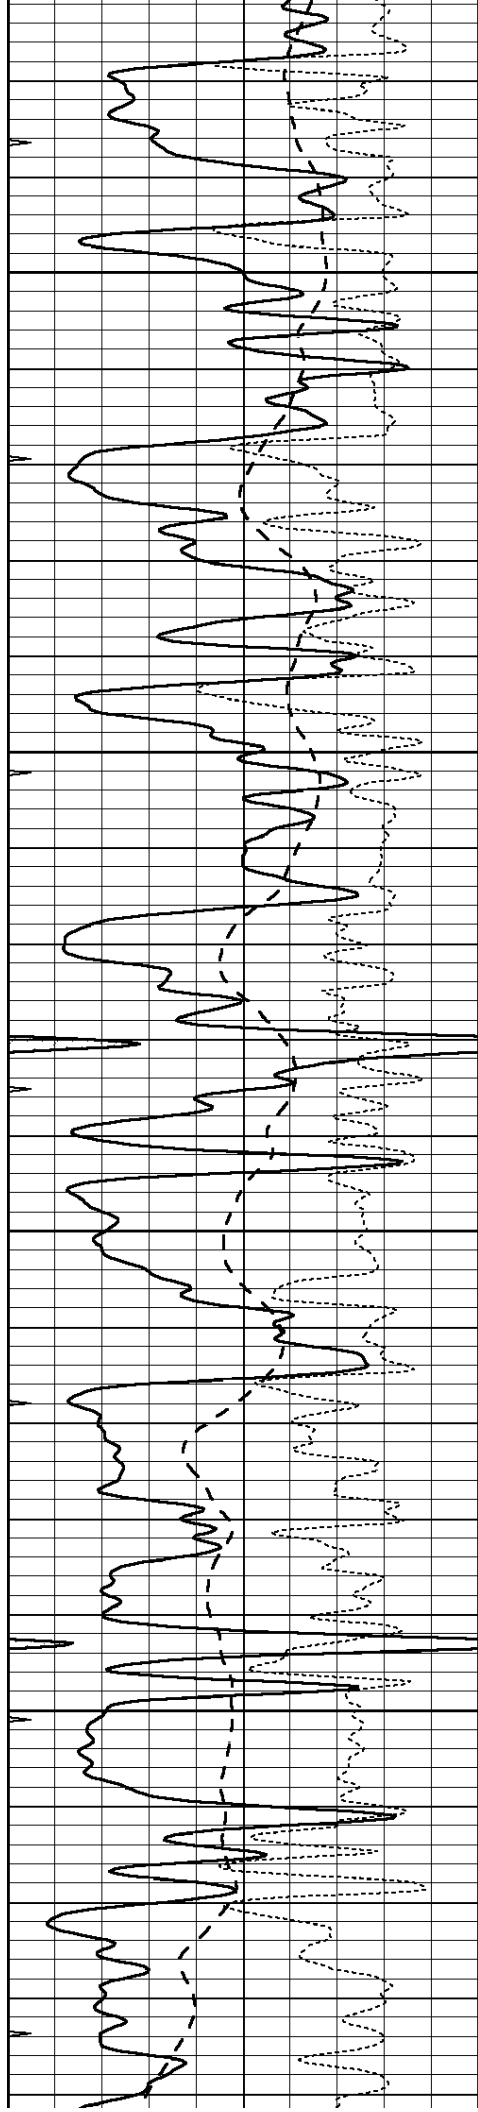



3950

4000

4050

4100

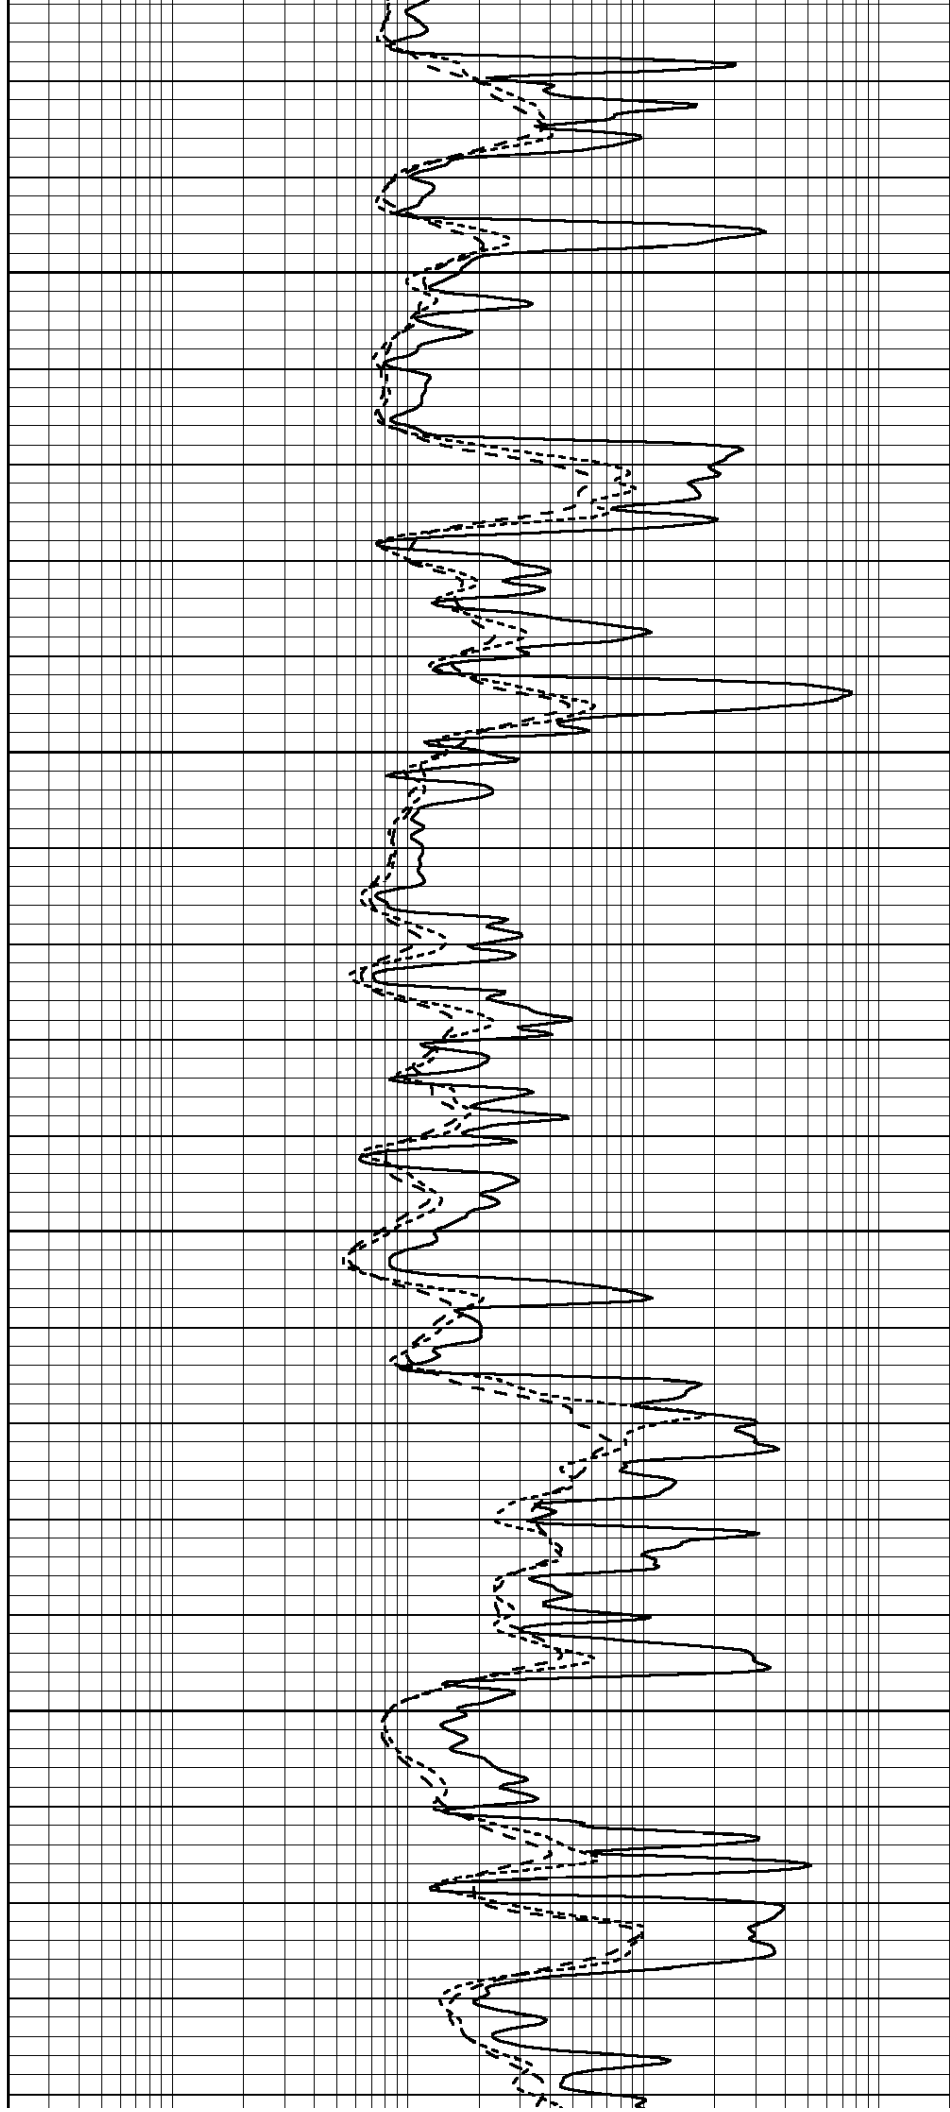

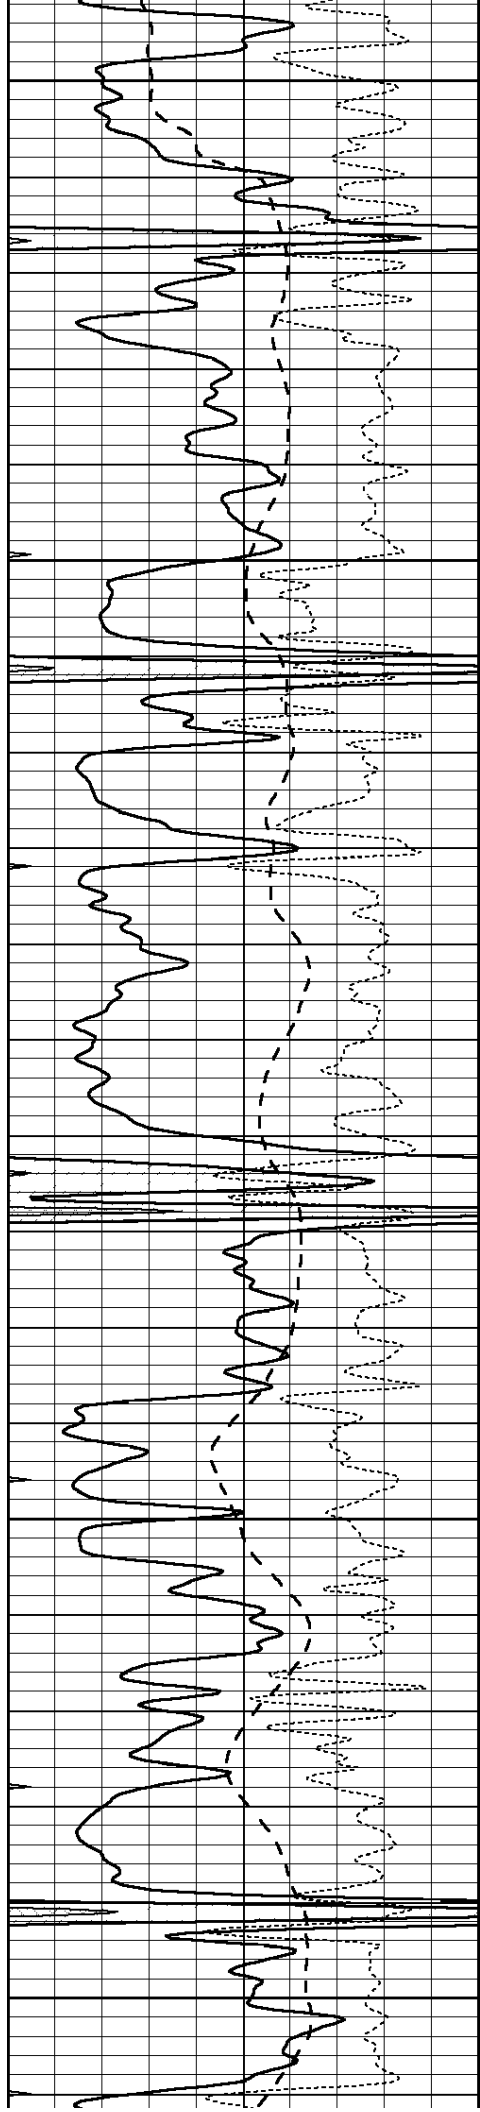


4150


4200

4250

4300

4350

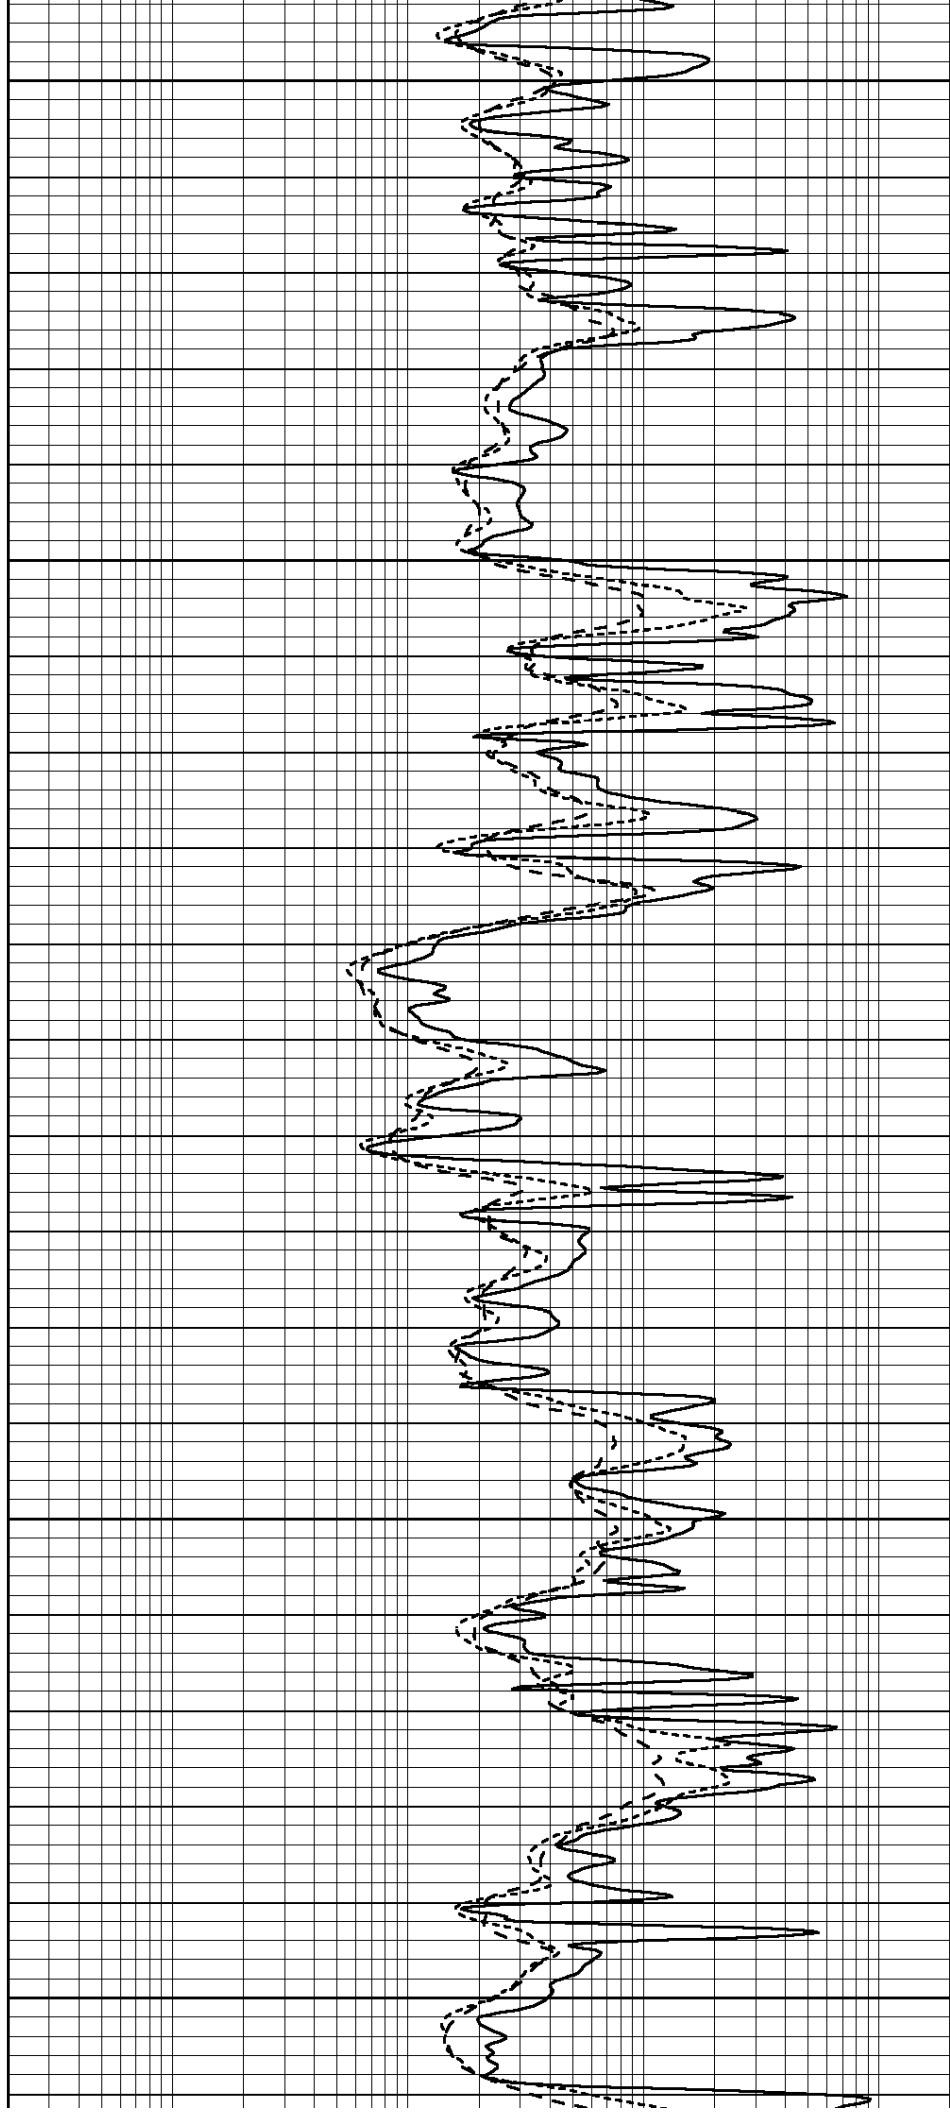

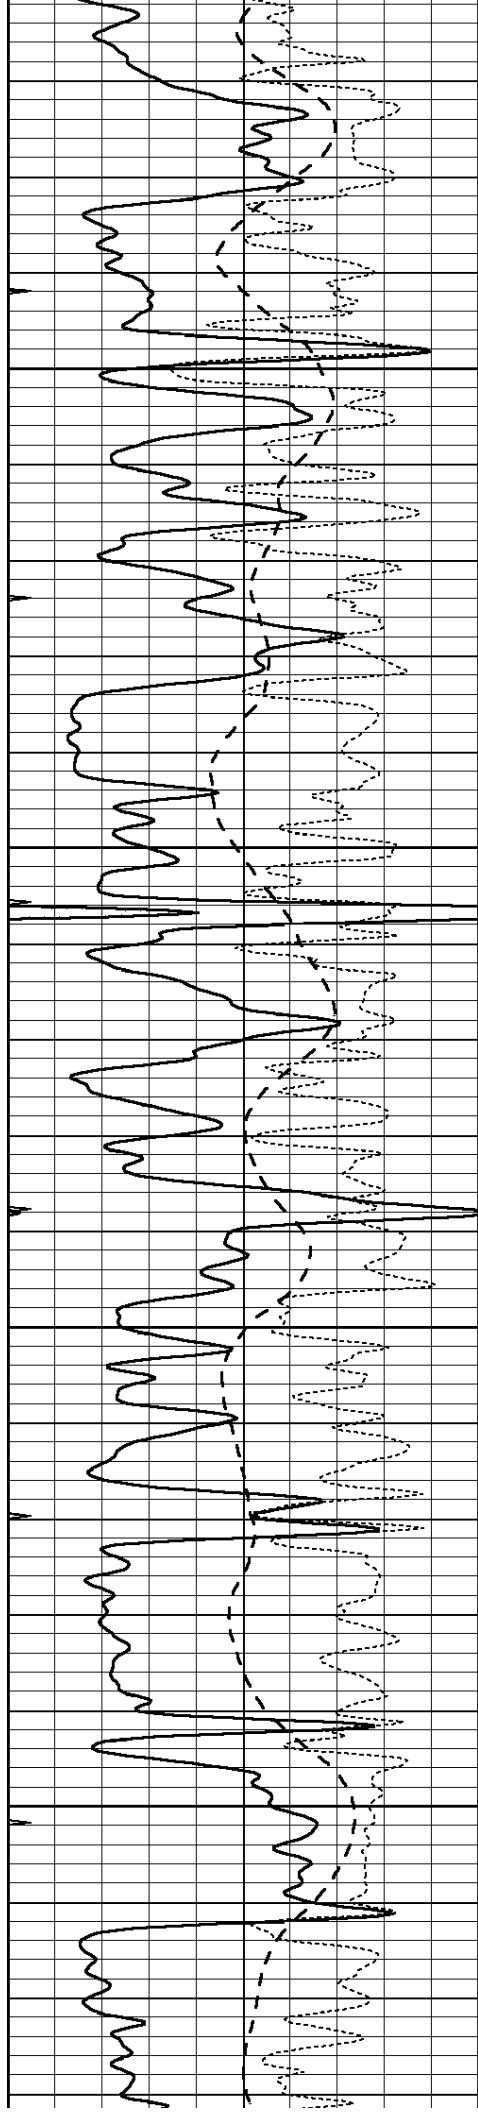


4400


4450

4500

4550

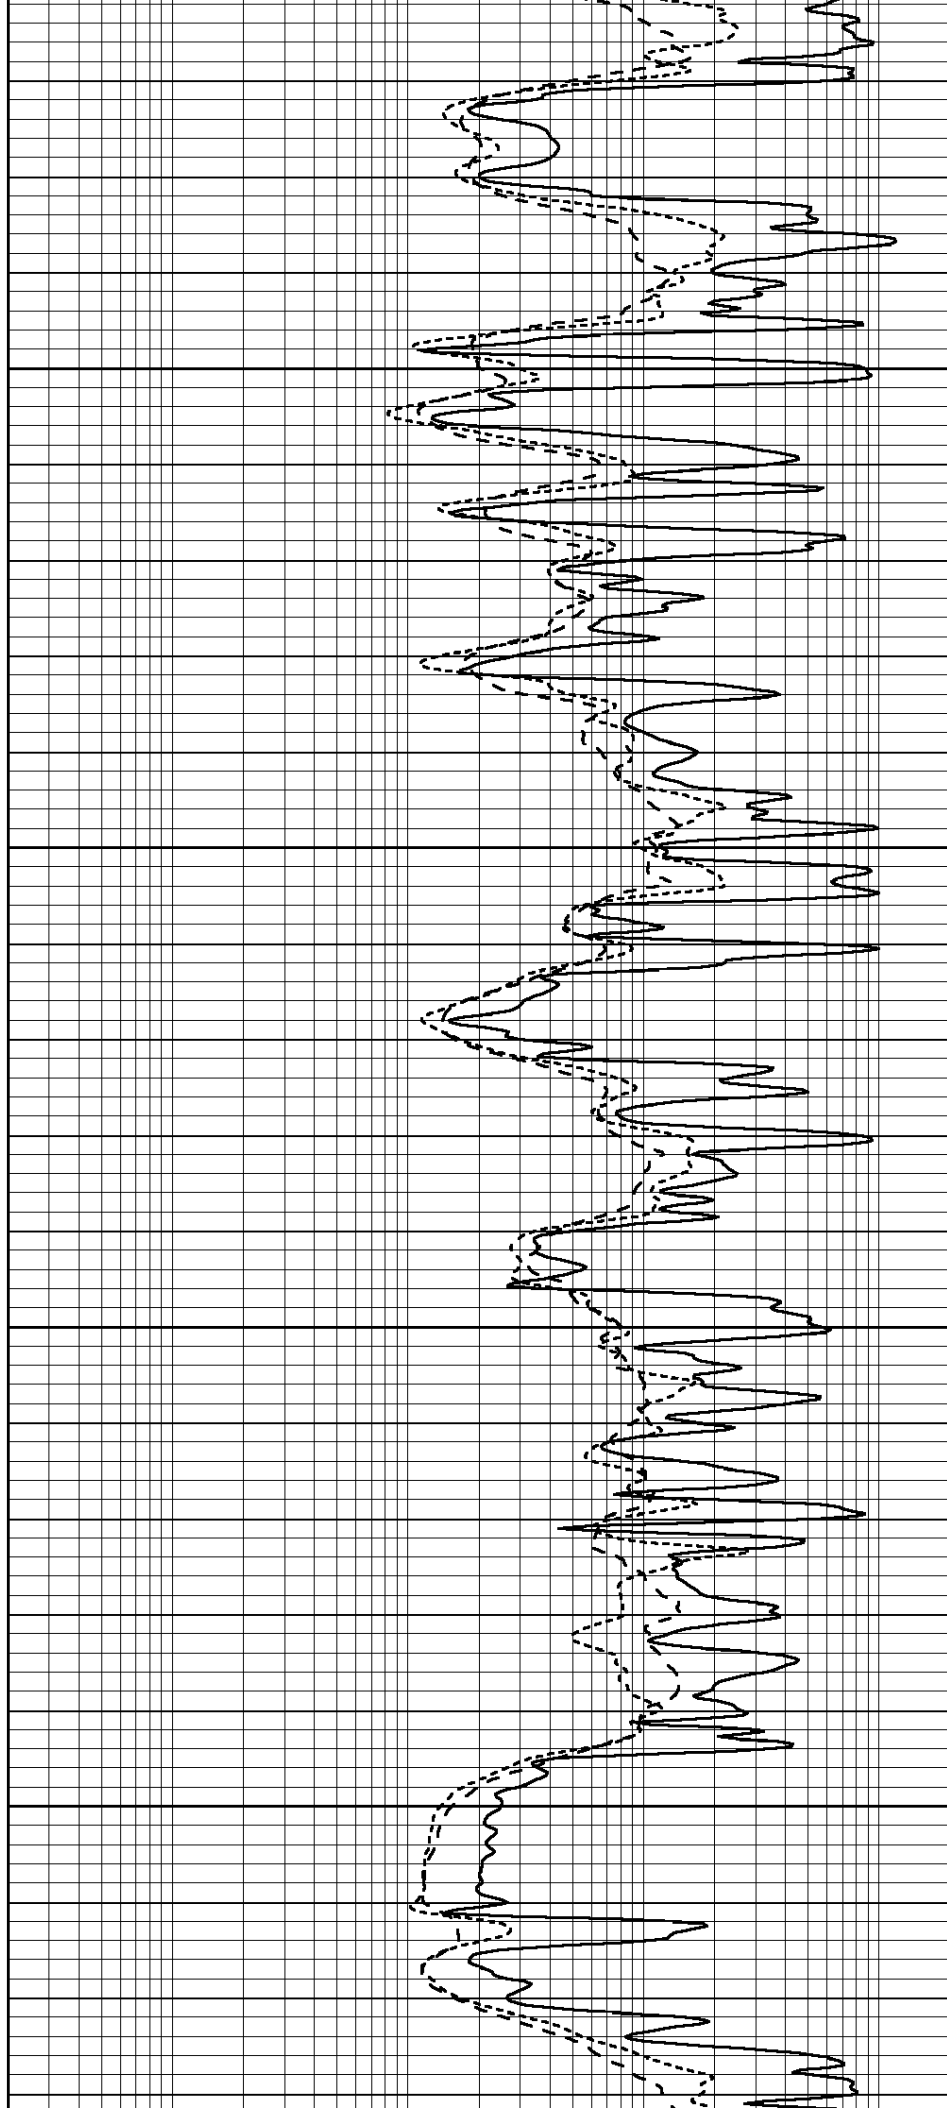



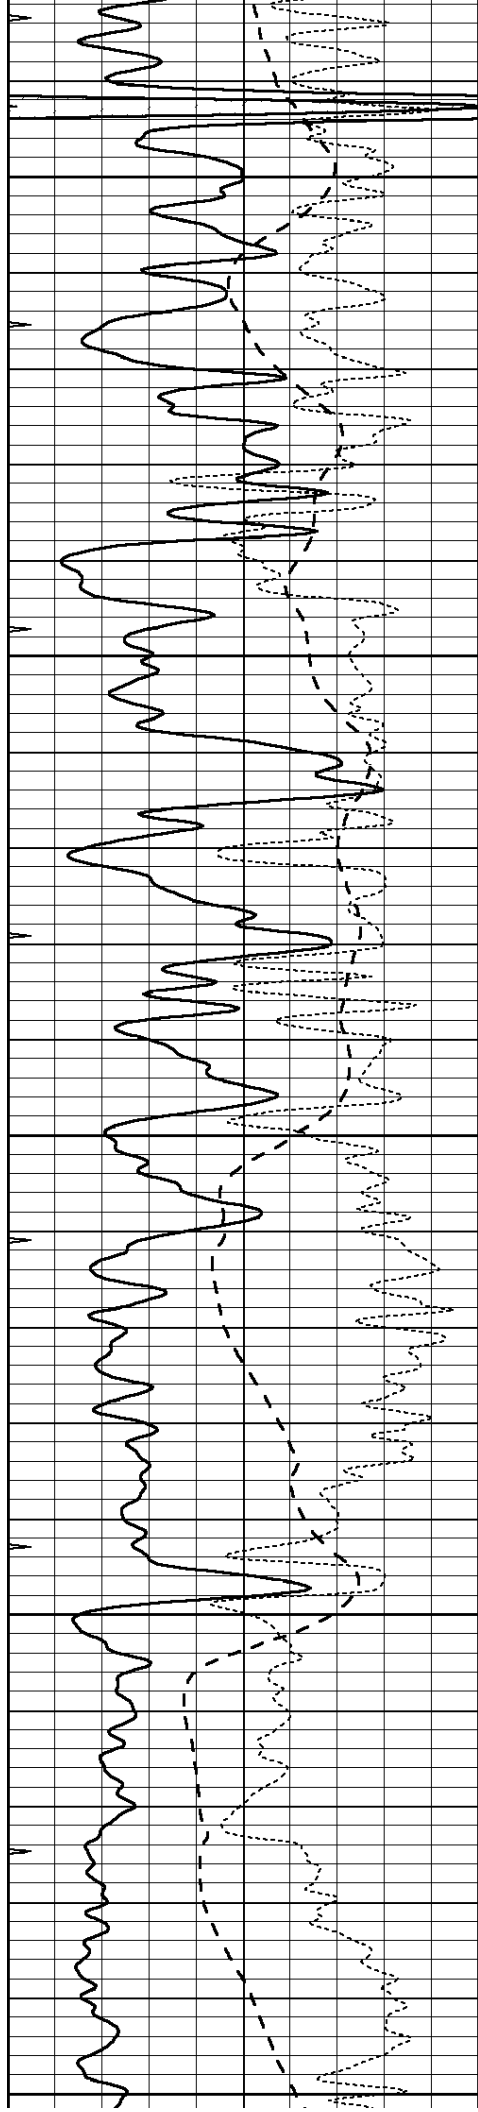


4600


4650

4700

4750

4800

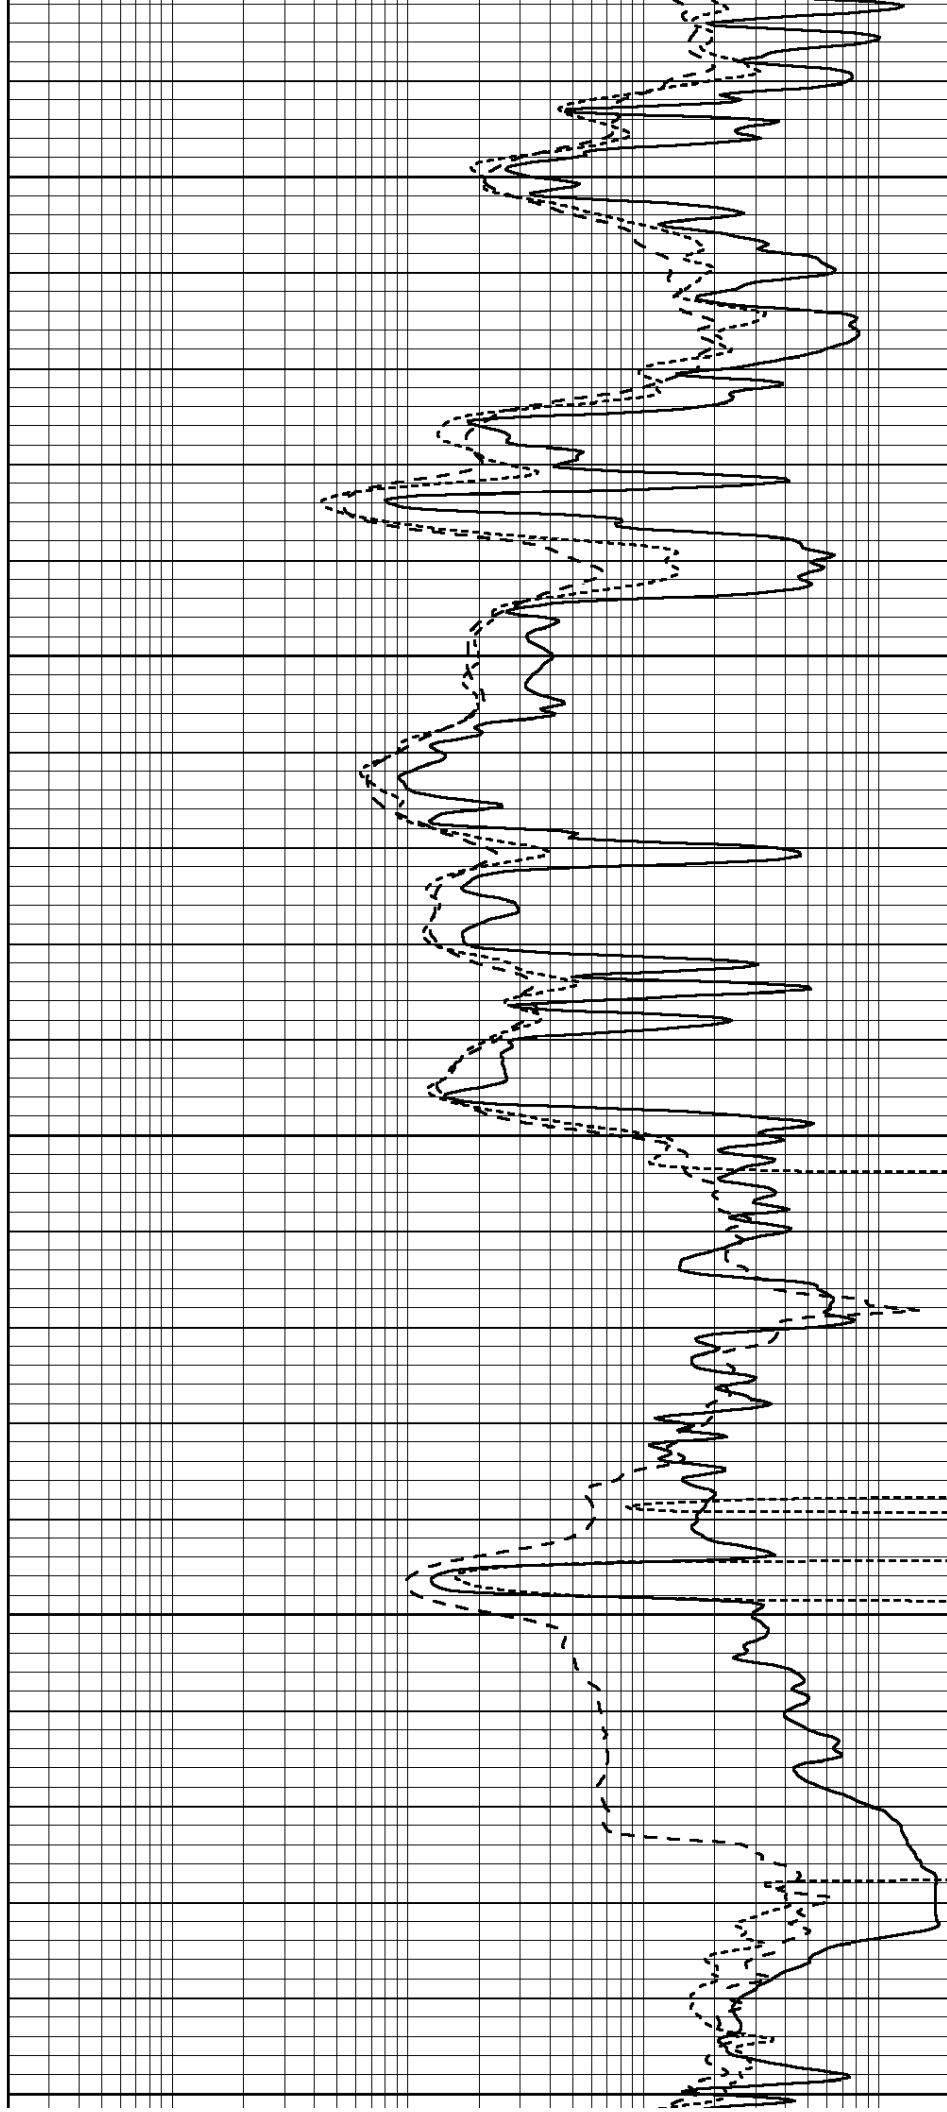

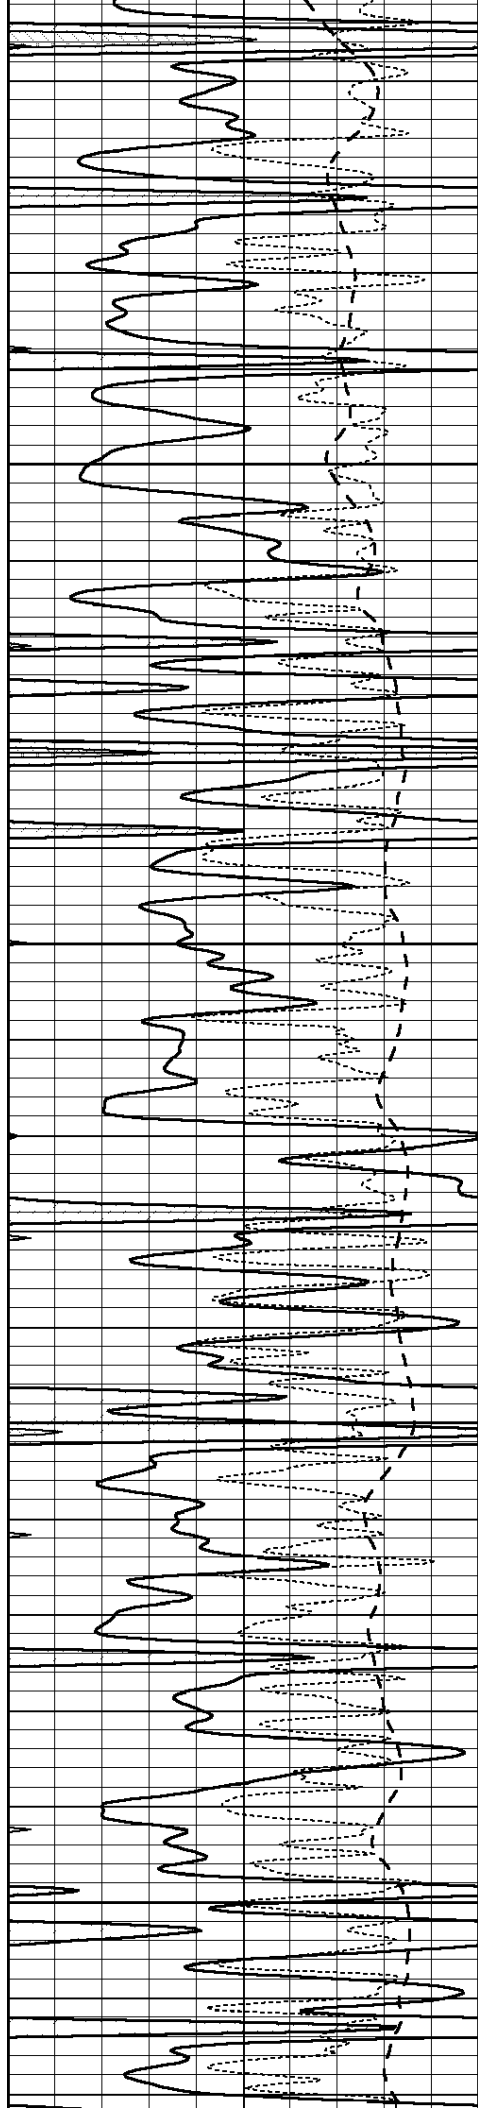



4850

4900

4950

5000

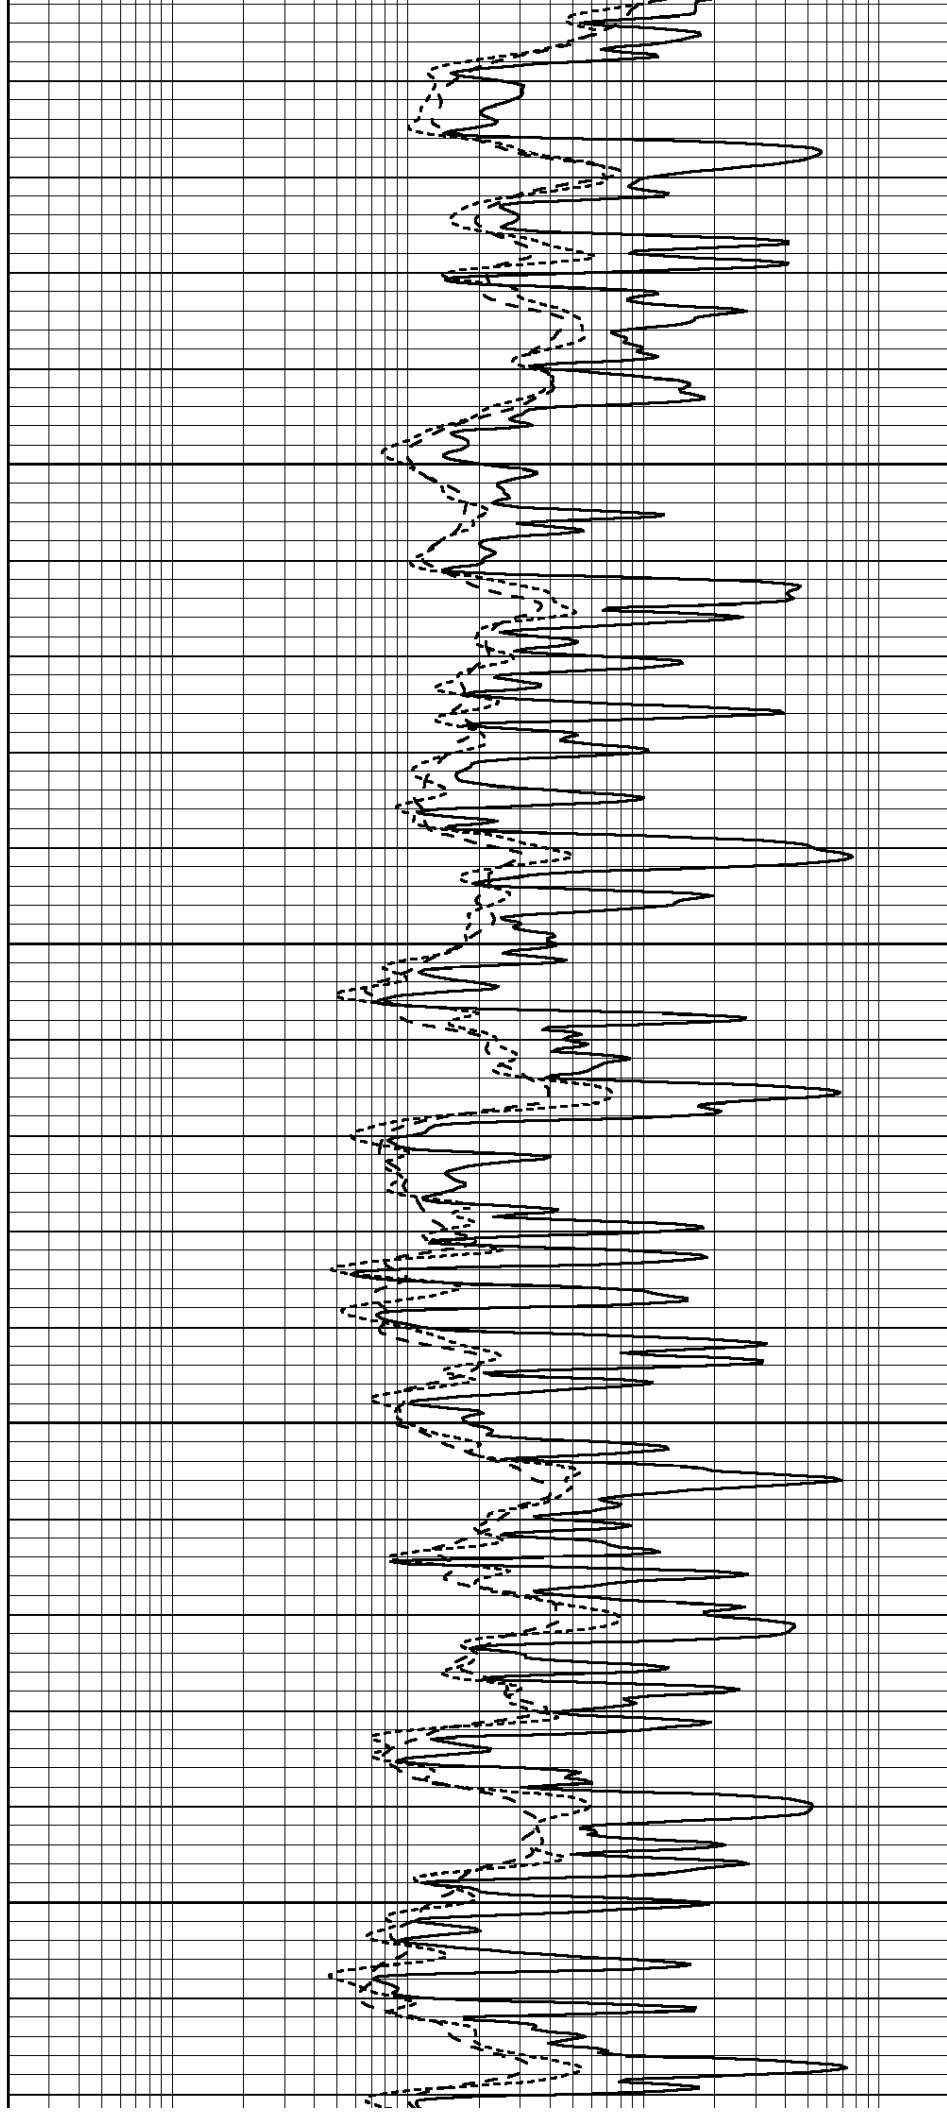

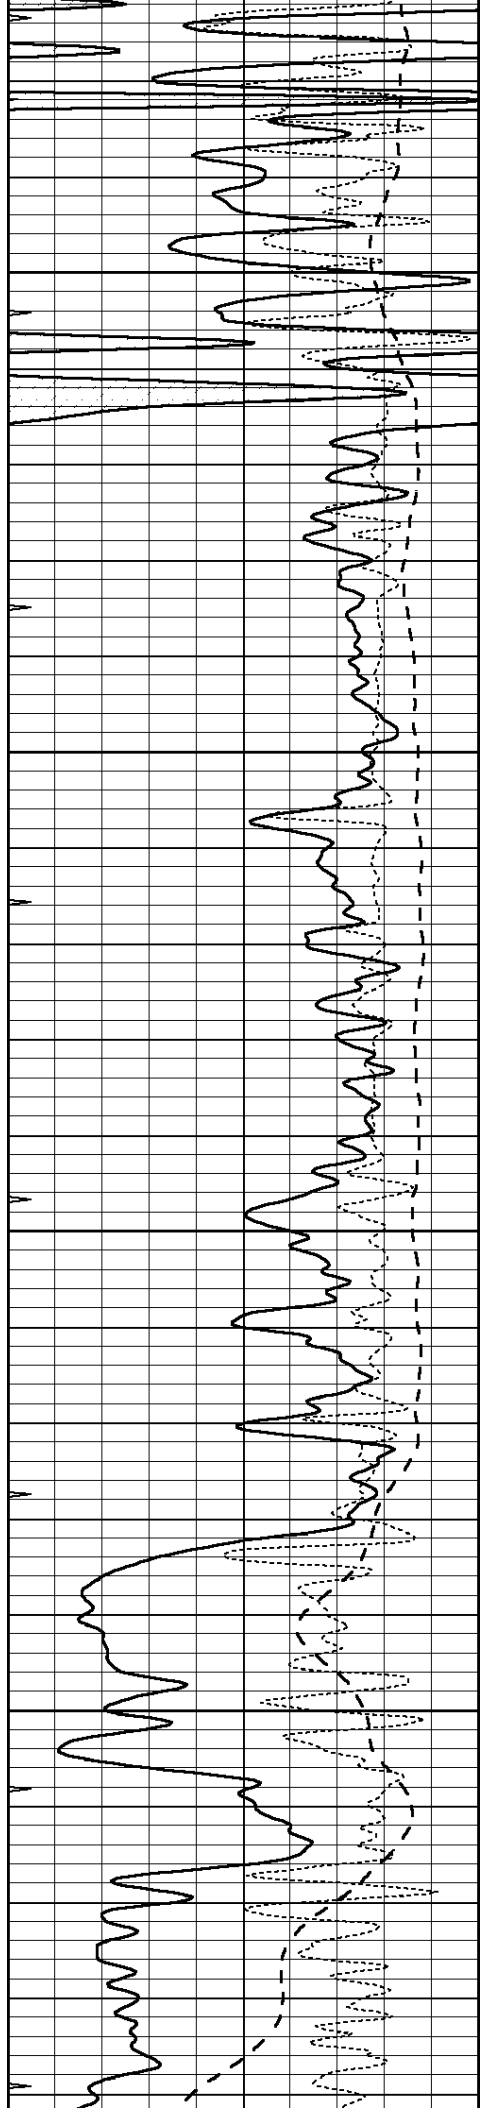



5050

5100

5150

5200

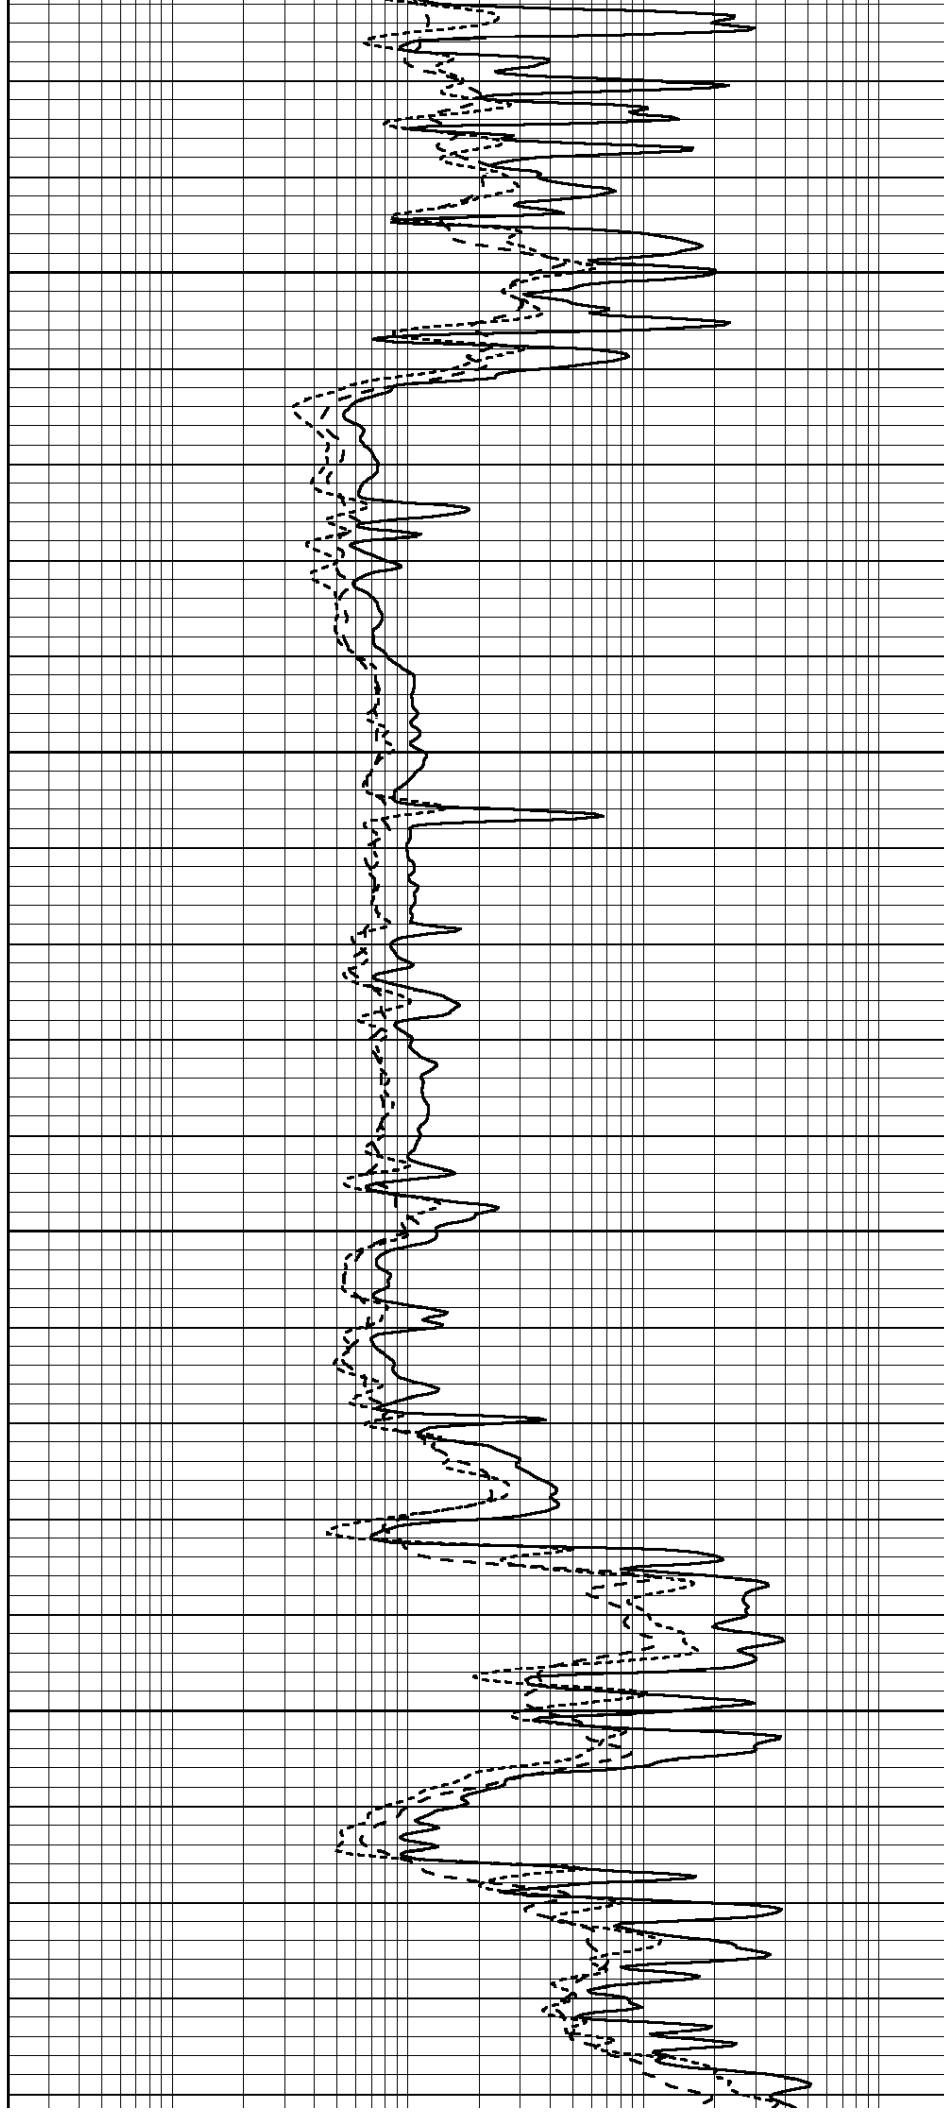

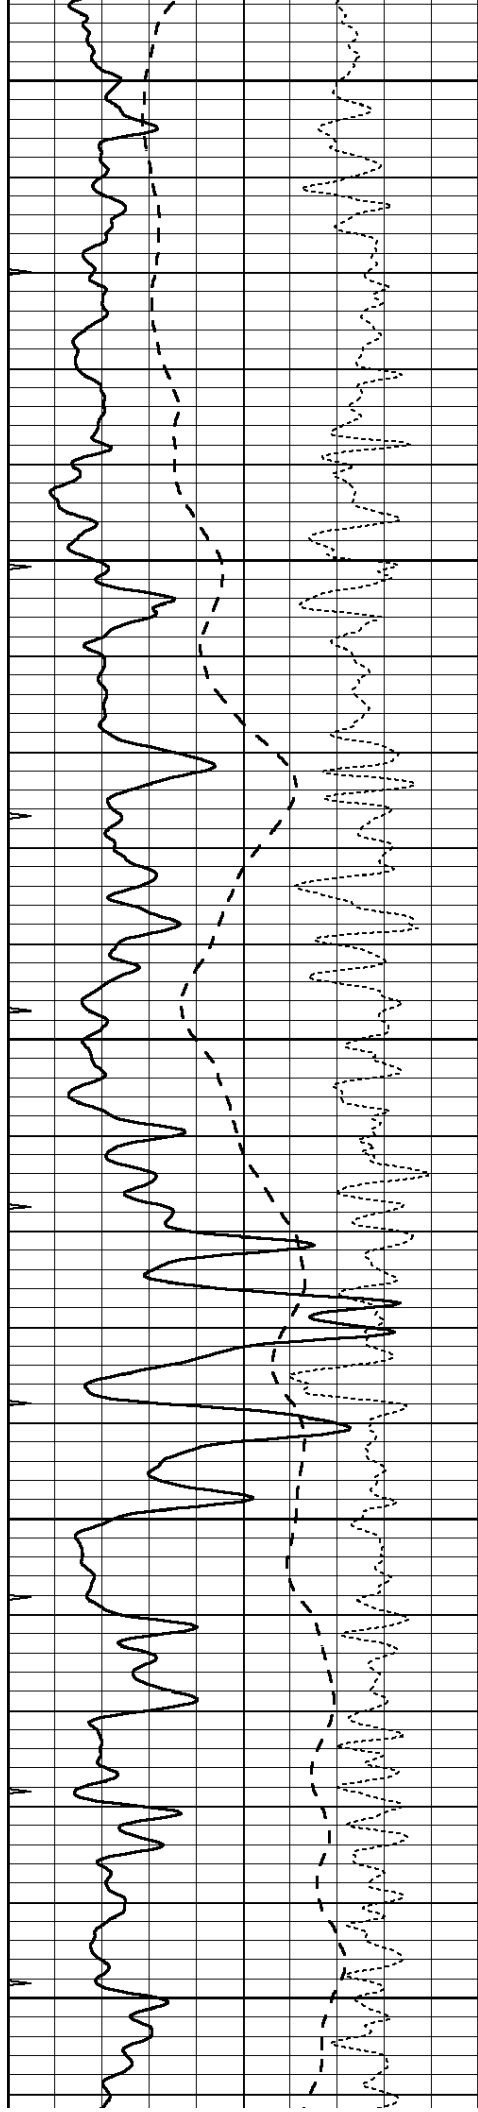


5250


5300

5350

5400

5450

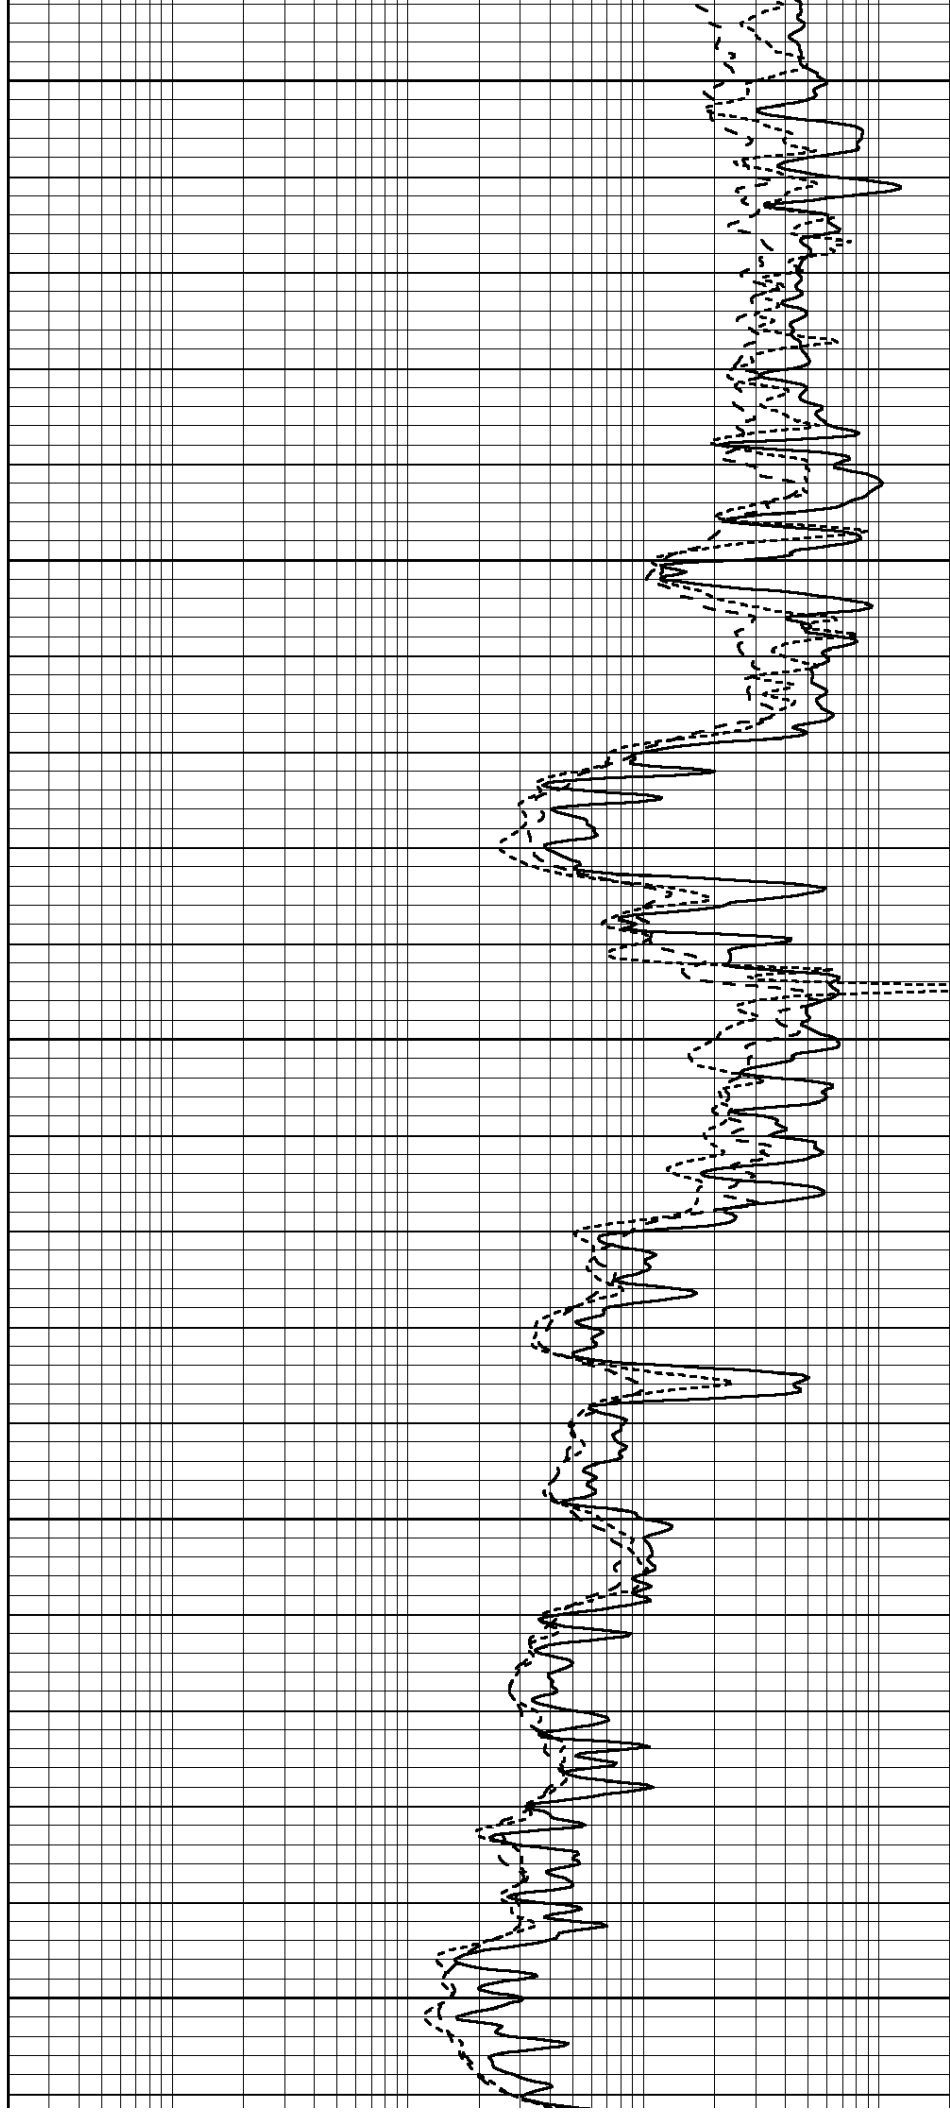

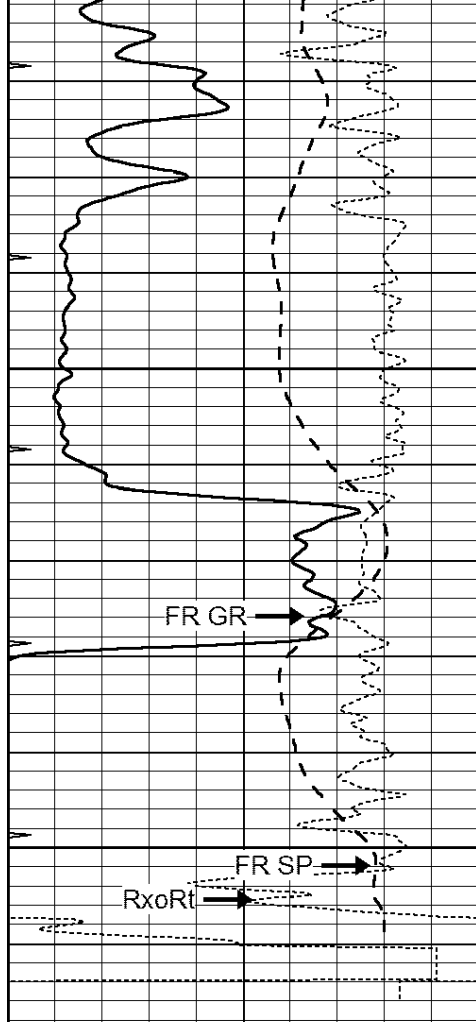


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

5500

5550

LTD 5562

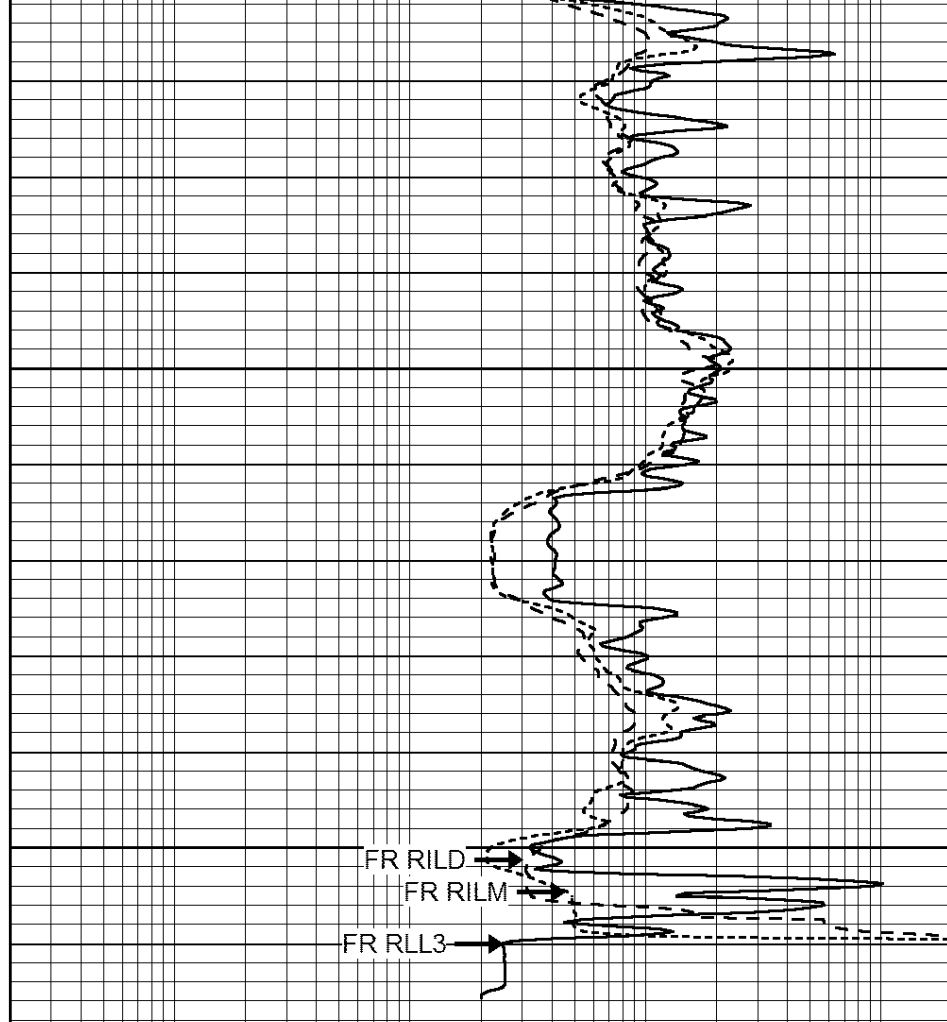

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




# REPEAT SECTION


Database File: 22117pe.db  
 Dataset Pathname: pass2.1  
 Presentation Format: \_dil  
 Dataset Creation: Sun Jan 05 13:45:57 2014 by Calc Open-Cased 090629  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

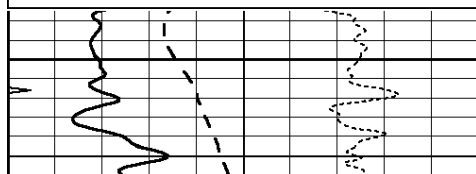

5350

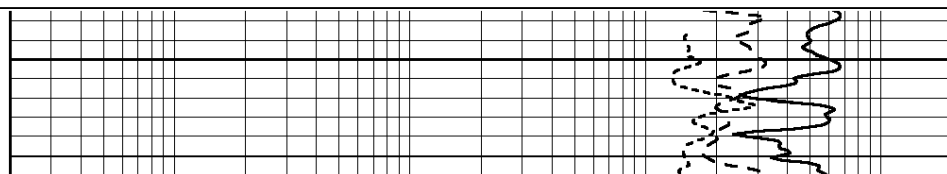

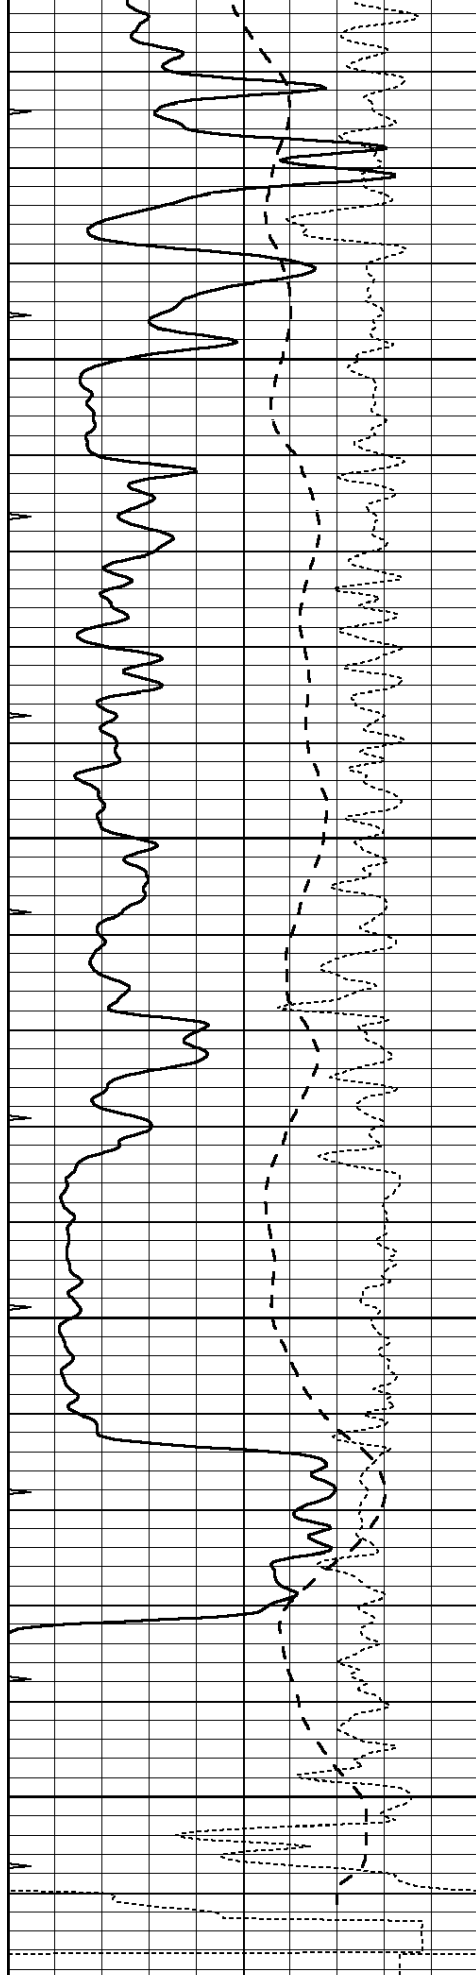


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

5400

5450

5500

5550

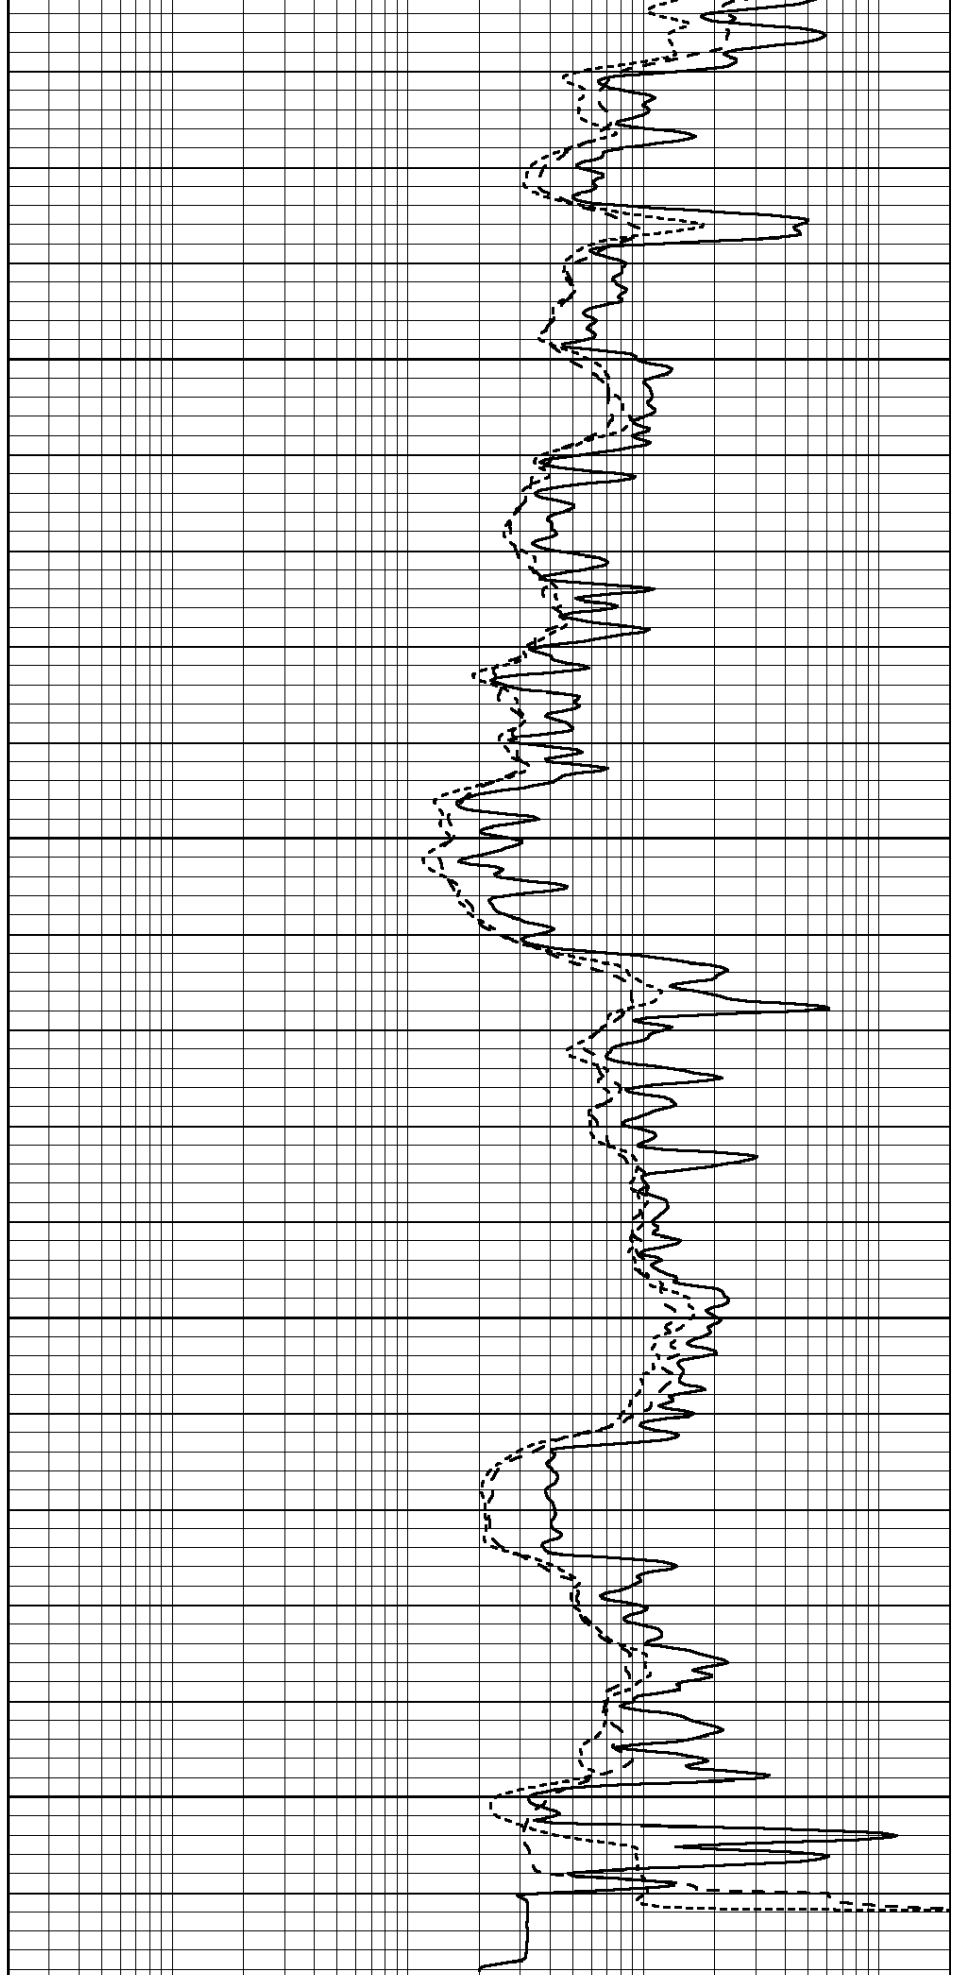

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

0	MINMK	20
---	-------	----

# Calibration Report

Database File: 22117pe.db  
Dataset Pathname: pass2.1  
Dataset Creation: Sun Jan 05 13:45:57 2014 by Calc Open-Cased 090629

## Dual Induction Calibration Report

Serial-Model: PROBE8-DILG  
Surface Cal Performed: Fri Aug 01 06:33:19 2008  
Downhole Cal Performed: Mon Jul 28 11:08:27 2008  
After Survey Verification Performed: Mon Jul 28 11:08:27 2008

### Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	632.616	-9.730
Medium	0.029	0.796	V	0.000	464.000	mmho/m	605.049	-17.680
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

### Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

### After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

## Litho Density Calibration Report Serial: 001 Model: PRB

### Master Calibration

Performed Thu Sep 17 09:57:21 2009

	Background	Magnesium	Aluminum	Sandstone	
Window 1	2056.0	9796.8	3673.1	10821.3	cps
Window 2	1920.0	8541.1	3303.5	9307.2	cps
Window 3	1563.1	4735.7	2212.8	5017.5	cps
Window 4	466.0	466.1	465.6	471.5	cps
Long Space	0.0	6621.1	1383.5	7387.2	cps
Short Space	2.5	2361.7	1523.2	2534.0	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	

Rib Angle : 44.4 Rib Slope : 0.978 Density/Spine Ratio : 0.541

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

--

Compensated Neutron Calibration Report

Serial Number:	6I
Tool Model:	G

CALIBRATION						
Detector		Readings		Target		Normalization
Short Space		1.00	cps	1.00	cps	1.0000
Long Space		1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION					
	Detector	Readings	Measured	Target	
1)	Short Space	cps			
	Long Space	cps	pu	pu	
2)	Short Space	cps			
	Long Space	cps	pu		
3)	Short Space	cps			
	Long Space	cps	pu		

POST-SURVEY VERIFICATION						
	Detector	Readings		Measured	Target	
1)	Short Space	cps		pu	pu	
	Long Space	cps				
2)	Short Space	cps		pu	pu	
	Long Space	cps				
3)	Short Space	cps				
	Long Space	cps				



5)	Short Space Long Space	cps cps	pu pu
Gamma Ray Calibration Report			
Serial Number:		GR6	
Tool Model:		OPEN	
Performed:		Fri Nov 29 08:34:37 2013	
Calibrator Value:		150.0	GAPI
Background Reading:		0.0	cps
Calibrator Reading:		276.0	cps
Sensitivity:		0.6035	GAPI/cps