

NOBLE ENERGY INC.
 BROSNAHAN 13-30
 NWSW 30-4N-64W
 1525' FSL & 220' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/28/2014

API: 05-123-18990
 COGCC #

GL Elev: 4841'
 KB Elev: 4852'


Spud Date: 2/20/1996

Surface Casing :
 8 5/8" 24# @ 536'
 Cement: 475 sx
 TOC: Surface

Stage Cement from 3960' to 4760'

TOC @ 6450'

Production Casing :
 4 1/2" 11.6# @ 7475'
 Cement: 180 sx cls G +160 sx cls A
 TD: 2/29/1996

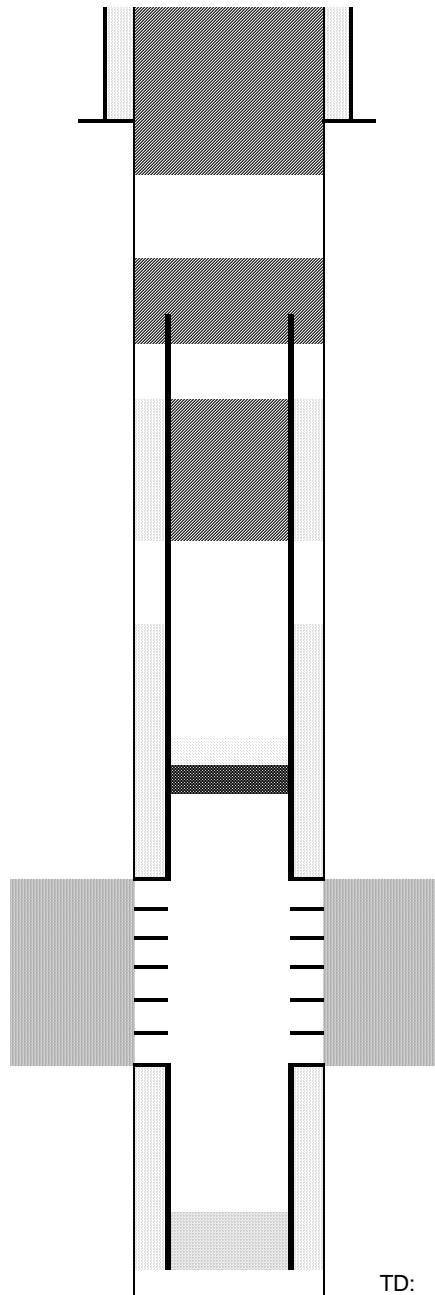

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 650'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

60 sx Balance Plug @ 4750'

CIBP @ 6985' w/ 2 sx cement on top

Niobrara Perforations 7035' - 7123'

Codell Perforations 7331' - 7341'

TD: 7495'