

NOBLE ENERGY INC.
HOLMAN PMB14-08
SENE 14-5N-64W
1980' FNL & 490' FEL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
6/11/2014

API: 05-123-14158
 COGCC #


GL Elev: 4586'
 KB Elev: 4596'

Spud Date: 1/30/1989

Surface Casing :
 8 5/8" 24# @ 319'
 Cement: 250 sx
 TOC: Surface

TOC @ 5936'

Production Casing :
 4 1/2" 15.1# @ 6823'
 Cement: 220 sx
 TD: 2/4/1989

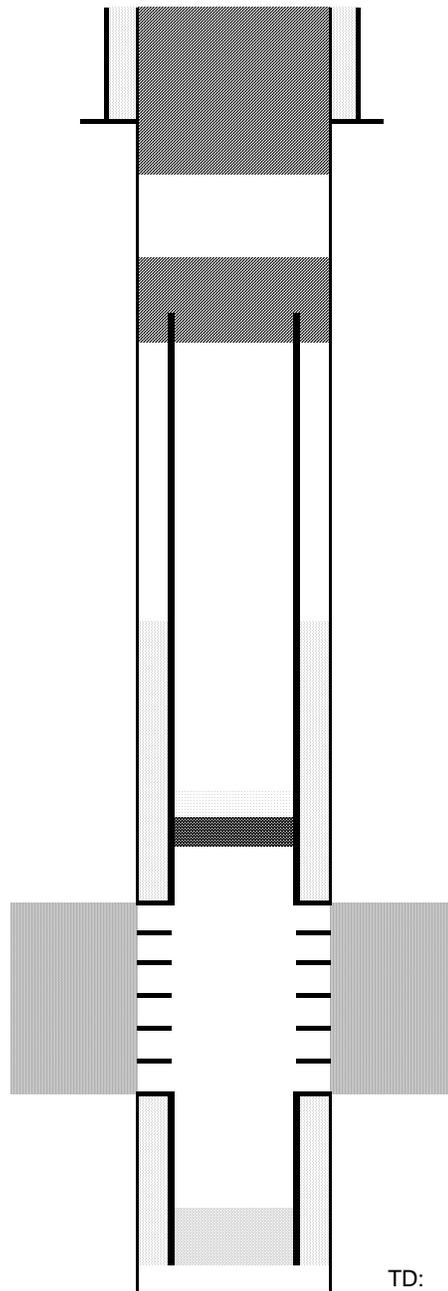

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx stub/shoe plug @ 420'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6351' w/ 2 sx cement on top

Niobrara Perforations 6401' - 6596'

Codell Perforations 6680' - 6693'

TD: 6847'