

NOBLE ENERGY INC.
CHENOWETH 02
SWSW 20-4N-64W
660' FSL & 660' FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
6/9/2014

API: 05-123-11924
 COGCC #

GL Elev: 4788'
 KB Elev: 4801'


Spud Date: 8/23/1984

Surface Casing :
 8 5/8" 24# @ 430'
 Cement: 300 sx
 TOC: Surface

Remedial Casing Cement from 3820' to 4610'

TOC @ 5904'

Production Casing :
 4 1/2" 10.5# @ 7120'
 Cement: 250 sx
 TD: 8/29/1984

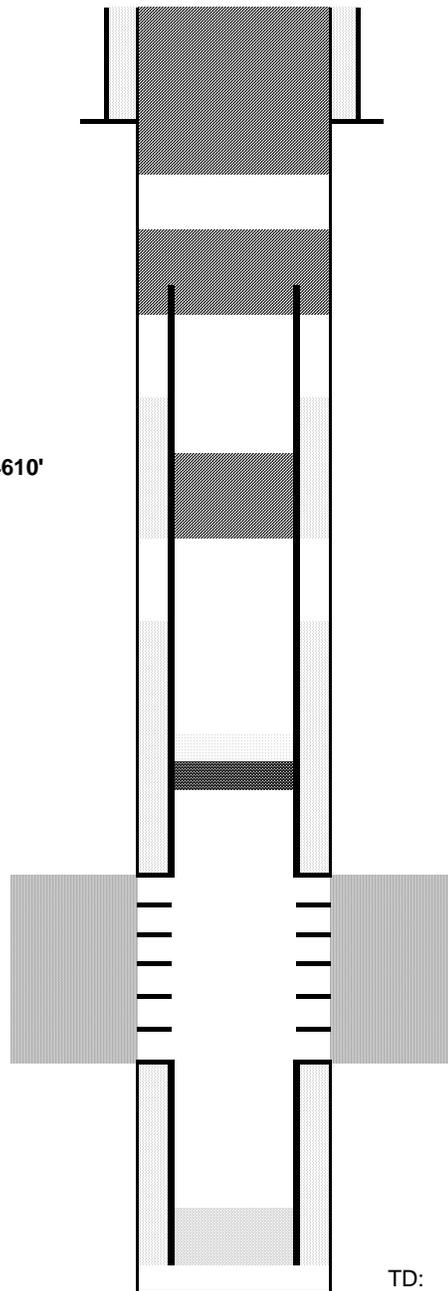

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx stub/shoe plug @ 600'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

30 sx Balance Plug @ 4650'

CIBP @ 6692' w/ 2 sx cement on top

Niobrara Perforations 6742' - 6898'

Codell Perforations 7017' - 7030'

TD: 7140'