

**NOBLE ENERGY INC.**  
 FEIT E23-10  
 NWSE 23-6N-65W  
 1988' FSL & 1989' FEL  
 Weld County, Colorado  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 6/30/2014

API: 05-123-16807  
 COGCC #

GL Elev: 4691'  
 KB Elev: 4700'


**Spud Date:** 3/13/1993

**Surface Casing :**  
 8 5/8" 24# @ 306'  
 Cement: 250 sx  
 TOC: Surface

**Prod Csg Cement from 3160' to 3870'**

**TOC @ 6180'**

**Production Casing :**  
 4 1/2" 10.5# @ 7146'  
 Cement: 350 sx + 225 sx  
 TD: 3/19/1993

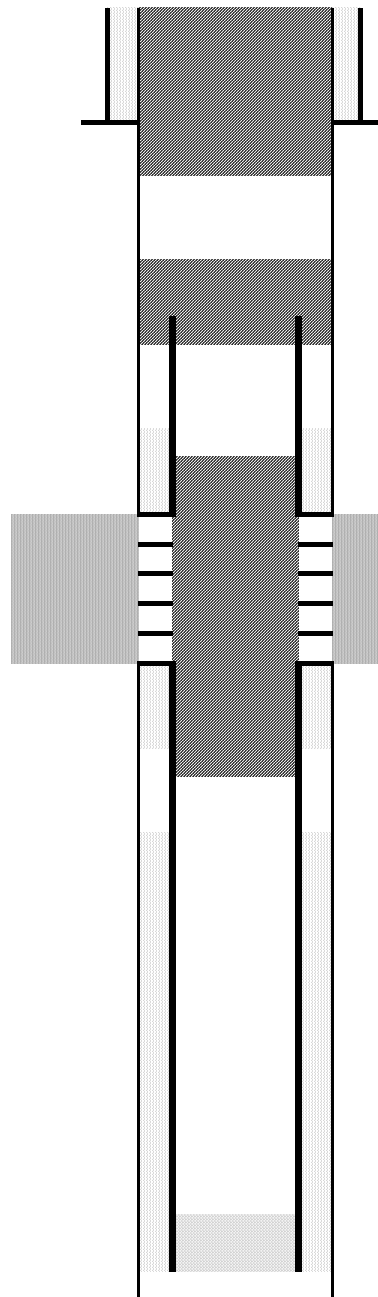

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx stub/shoe plug @ 590'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

Parkman Perforations 3598' - 3602'

55 sx Balance Plug @ 4000'

FO Tool @ 3850'

(Niobrara and Codell were never perfed)

TD: 7156'