

**NOBLE ENERGY INC.**

LOWER LATHAM 02-45

NESE 2-4N-65W

1455' FSL & 1321' FEL

Weld County, Colorado

Wattenberg

**CURRENT WELLBORE SCHEMATIC**

with PROPOSED P&A

6/10/2014

API: 05-123-23961  
COGCC #

GL Elev: 4688'  
KB Elev: 4704'

Spud Date: 8/31/2007


**Surface Casing :**

8 5/8" 24# @ 454'  
Cement: 215 sx  
TOC: Surface

TOC @ 3150'

**Production Casing :**

4 1/2" 11.6# @ 7170'  
Cement: 645 sx  
TD: 9/5/2007

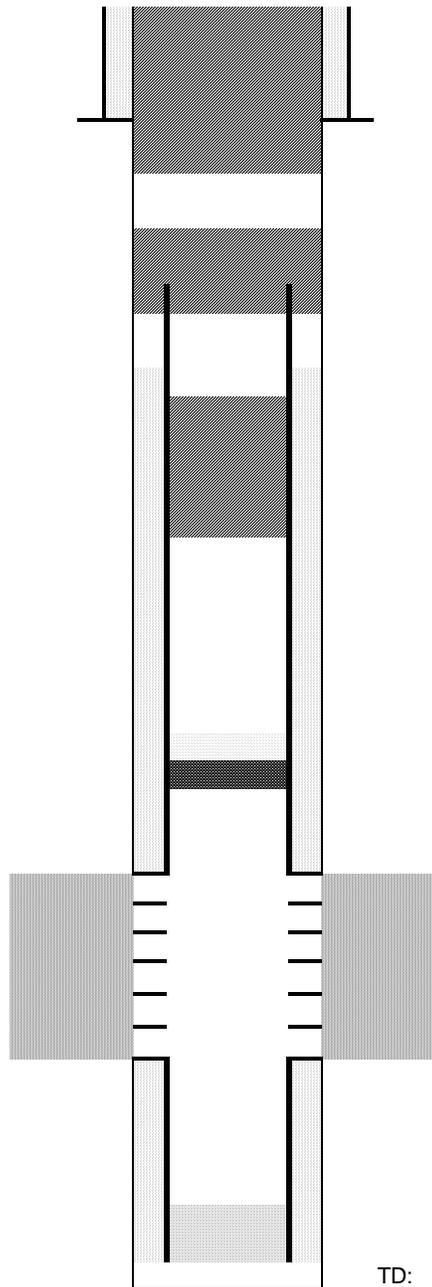

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx stub/shoe plug @ 560'  
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
Cut and pull csg @ 2500'

80 sx Balance Plug @ 4500'

CIBP @ 6800' w/ 2 sx cement on top

Niobrara Perforations 6850' - 6878'

Codell Perforations 6996' - 7006'

TD: 7206'