



# RESERVOIR PERFORMANCE MONITOR

Baker Atlas

File No: CH085726

Company Well WPX ENERGY SAVAGE RWF 313-25

API No: Field RULISON

County GARFIELD State CO

05045219870000

Location

SHL: 1655' FSL & 2294' FWL

RWF 23-25 PAD BHL: 2479' FSL & 723' FWL

25 6S 94W SEC 25 TWP 6S RGE 94W

NABORS 677

Other Services

BOND LOG

Permanent Datum GL Elevation 6096 ft

Log Measured From KB 26 ft Above P. D.

Drill Measured From KB Elevations KB 6122 ft DF GL 6096 ft

Date	08/MAY/14	
Run	ONE	
Service Order	085726	
Depth Driller	8865 ft	
Depth Logger	8826 ft	
Bottom Logged Interval	8815 ft	
Top Logged Interval	4714 ft	
Time Started	13:00	
Time Finished	18:30	
Operator Rig Time	5.5 HOURS	
Type of Fluid in Hole	WATER	
Fluid Density	NA	
Salinity	NA	
Fluid Level	75 ft	
Logged Cement Top	NA	
Wellhead Pressure	0 psi	
Maximum Hole Deviation	NA	
Nominal Logging Speed	10 fpm	
Maximum Recorded Temperature	238 degF	
Reference Log	BAKER HUGHES BOND LOG	
Reference Log Date	08/MAY/14	
Equipment No.	4271	GRAND JUNCTION
Recorded By	NEMELL	
Witnessed By	BOB CADY	

- FOLD HERE

In making interpretations of logs, our employees will give the customer the benefit of their best judgement. But since all interpretations are opinions based on inferences from electrical or other measurements, we cannot, and we do not guarantee the accuracy or correctness of any interpretation. We shall not be liable or responsible for any loss, cost, damages, or expenses whatsoever incurred or sustained by the customer resulting from any interpretation made by any of our employees.

Borehole Record		
Bit Size	From	To
13.5 in	0 ft	1145 ft
8.75 in	1145 ft	8876 ft

Casing Record				
Size	Weight	Grade	From	To
9.625 in			0 ft	1145 ft
4.5 in	11.6 lbm/ft	1-80	0 ft	8876 ft

Remarks
All data on this log is shifted and depth matched using the Gamma Ray curve to the Baker Hughes bond log dated 5/8/2014 at the client's request.
The depth matching process creates potential for collar lengths to vary from those recorded on other cased hole wireline units without a Gamma Ray reference.
The amount of linear shift is 8 feet.

Logged in PNC-3D mode.

BHT = 238 ° F

SJ = 5589'-5613'

Equipment Data					
Run	Trip	Tool	Series Number	Serial Number	Position
1	1	PCM	8250EA	10397894	FREE
1	1	TEL/CCL	8248ED	10296408	FREE
1	1	GR	2812LA	10274382	FREE
1	1	RPM	8281EA	10303640	FREE
1	1	RPM	8283PA	10585555	FREE
1	1	RPM	8281FA	10401926	FREE
1	1	TEMP	8255XA	11774568	FREE

MAIN SECTION  
PNC 3-D MODE

SPL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	TOP	BOTTOM
PNC Porosity	Borehole	Cased		4690.000	8072.000
PNC Porosity	Borehole Size	8.750	inch	4690.000	8072.000
PNC Porosity	Casing Size	4.500	inch	4690.000	8072.000
PNC Porosity	Gas Filled	Non Gas Filled		4690.000	8072.000
PNC Porosity	Matrix	Sandstone		4690.000	8072.000
TPS Pressure	Temperature Corr. Source	Fixed (72.00)	degF	4690.000	8072.000
PNC Porosity	Borehole	Cased		8072.000	8819.874
PNC Porosity	Borehole Size	8.750	inch	8072.000	8819.874
PNC Porosity	Casing Size	4.500	inch	8072.000	8819.874
PNC Porosity	Gas Filled	Non Gas Filled		8072.000	8819.874
PNC Porosity	Matrix	Sandstone		8072.000	8819.874
TPS Pressure	Temperature Corr. Source	Fixed (72.00)	degF	8072.000	8819.874

DEPTH OFFSETS

## (for Acquired Curves)

SERIES	DEPTH OFFSET	ACQUIRED CURVES
8248ED	-26.519	FLTM
8248ED	-24.519	CCL CHV
2812LA	-21.969	GR
8281XA	-12.702	HVC3Q0 SEQ3 AMA3 AML3 BKX CXS CPT3Q0 CPT3Q2 CPT3Q3 CPT3Q4 ET3 IXS MCS3 MCS3Q0 QCAL3 RGN3 RICX SDA3 SDL3 SGA3 SGL3 STA3 XS ASPEC3 AMB3 AMF3 CHF3 IXSC IXSN RATO23 RICXC RIN13C RIN23 RIN23C SD3D SG3D SGB3 SGF3 WDT3 CXSR IXSR XSR RICXR
8281XA	-12.291	HVC2Q0 SEQ2 AMA2 AMB2 AMF2 AML2 BKL CHF2 CLS CPT2Q0 CPT2Q2 CPT2Q3 CPT2Q4 ET2 ILS LS MCS2 MCS2Q0 QCAL2 RGN2 RICL RONE23 RTWO23 SDA2 SDL2 SGA2 SGB2 SGF2 SGK2 SGL2 STA2 ASPEC2 ILSC ILSN WDT2 RICLC CLSR ILSR LSR RICLR
8281XA	-12.041	CPRS HVC1Q0 MV SEQ SEQ1 AMA1 AMB1 AME1 AMF1 AML1 BKS CHF1 CSS CORB CORF CPT1Q0 CPT1Q2 CPT1Q2A CPT1Q2B CPT1Q2C CPT1Q3 CPT1Q4 CPT1Q5 ET1 G1 G2 GE1S GE2S ISS MCS1 MCS1Q0 QA1 QCAL1 QM1 RATO RATO13 RBOR RGN1 RICS RIN RONE RPOR RTWO RIN13 RONE13 RTWO13 SALB SC1 SDA1 SDL1 SGA1 SGB1 SGBC SGE1 SGF1 SGFC SGK1 SGL1 SS SS2 STA1 PD1S PD2S PD3S MD1S MD2S MD3S DG1S DG2S DG3S PD1M PD2M PD3M MD1M MD2M MD3M DG1M DG2M DG3M MVS MA MVM FILV IAM TA PVM PVS IAS SSTAT QPD1 QPD2 QPD3 QMD1 QMD2 QMD3 QDG1 QDG2 QDG3 QMA QTA QFILV QMV QPV QIA DERR DCNT QPK1 QSA1 PKS1 ASPEC1 H0C FE2XC ISSC RINC ISSN RDN WDT1 RICSC CSSR G1R G2R ISSR SSR SS2R RATOR RATO13R RBORR RICSR RINR RIN13R RONE RPORR RTWOR
8255XA	-0.792	PTFS PTMS
8255XA	-0.775	SPF1 SPFQ TSCP TSDP
8255XA	0.000	DTEM TEMP TNF
SYSTEM	0.000	TEN TTEN


Well : SAVAGE RWF 313-25



File Name : d:\welldata\wp\lsavage rwf 313-25\313rpm\main2.xtf



Mode : PlotMgr 5.4.504



Interval : 4710.00 - 8830.00 feet UP


Created : 5/8/2014 10:36:51 PM

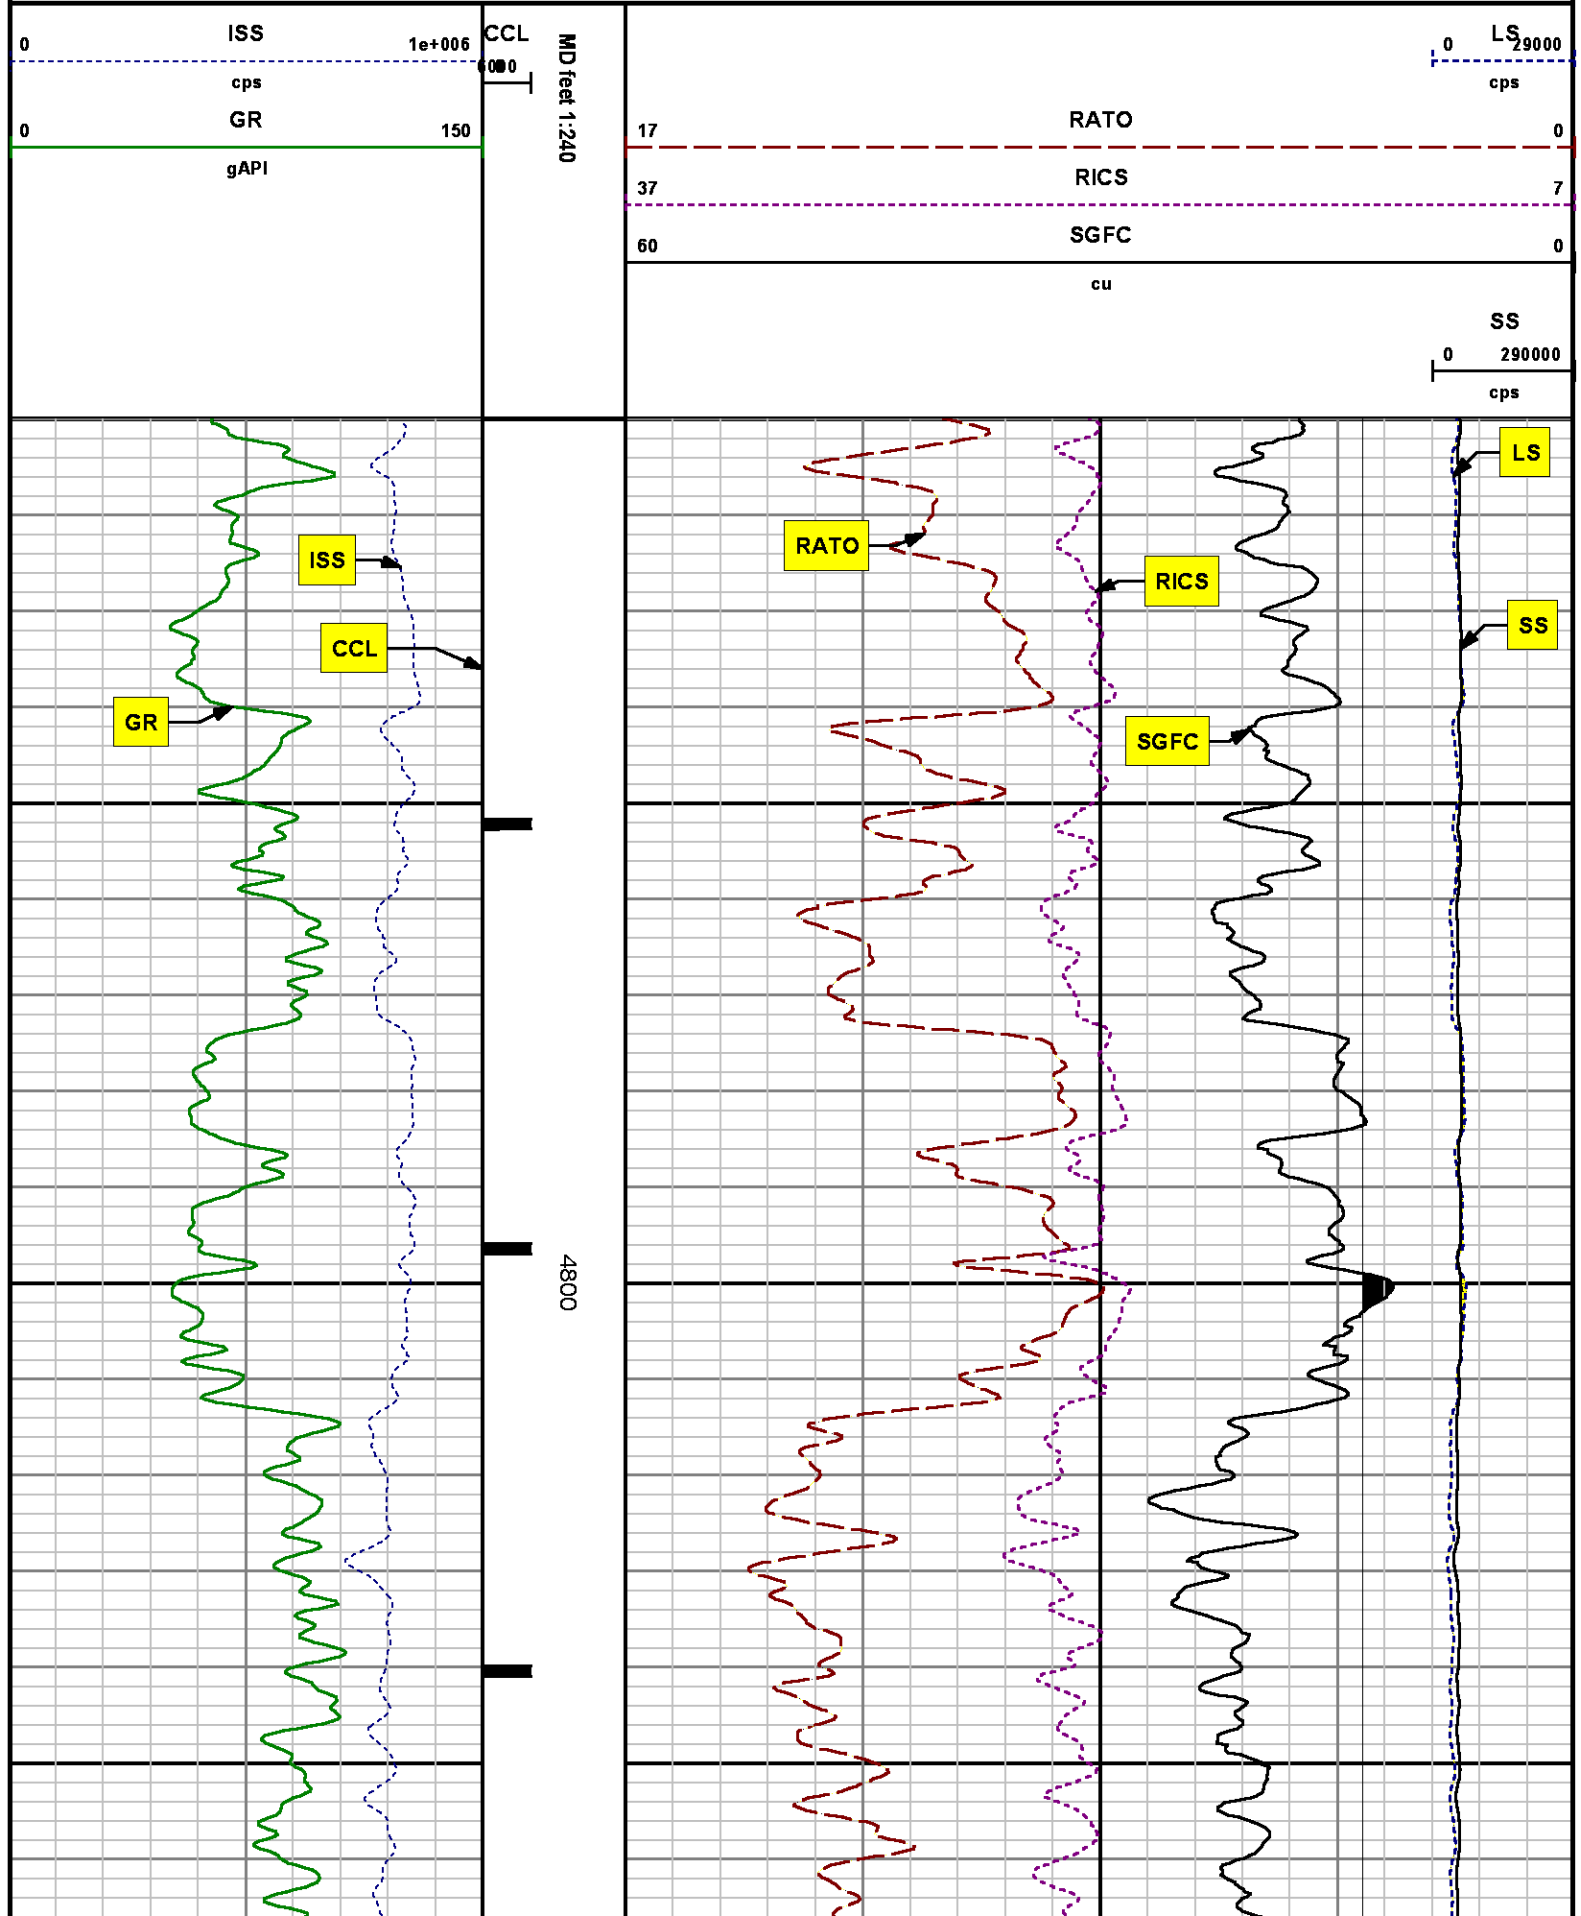

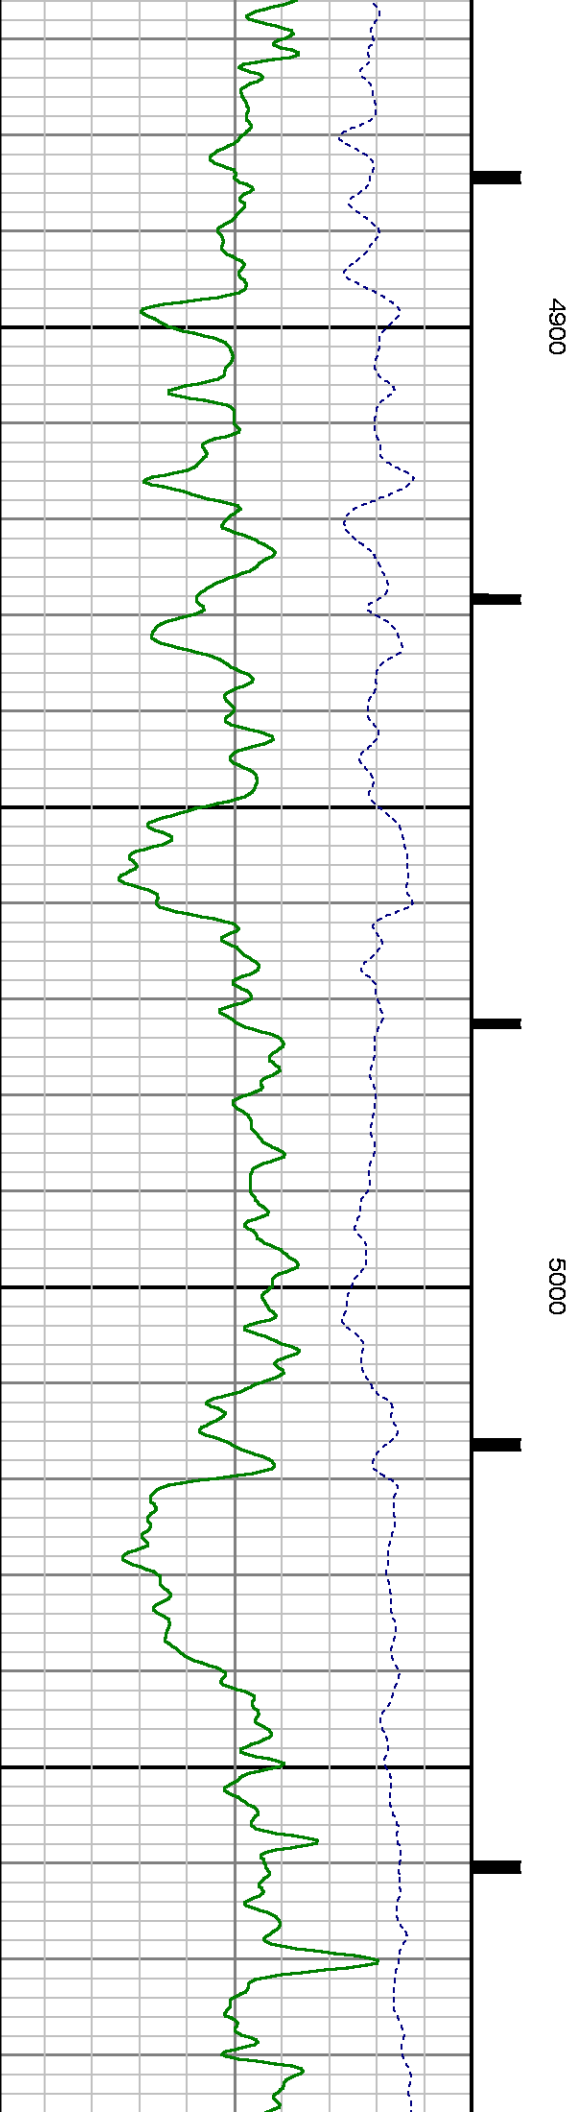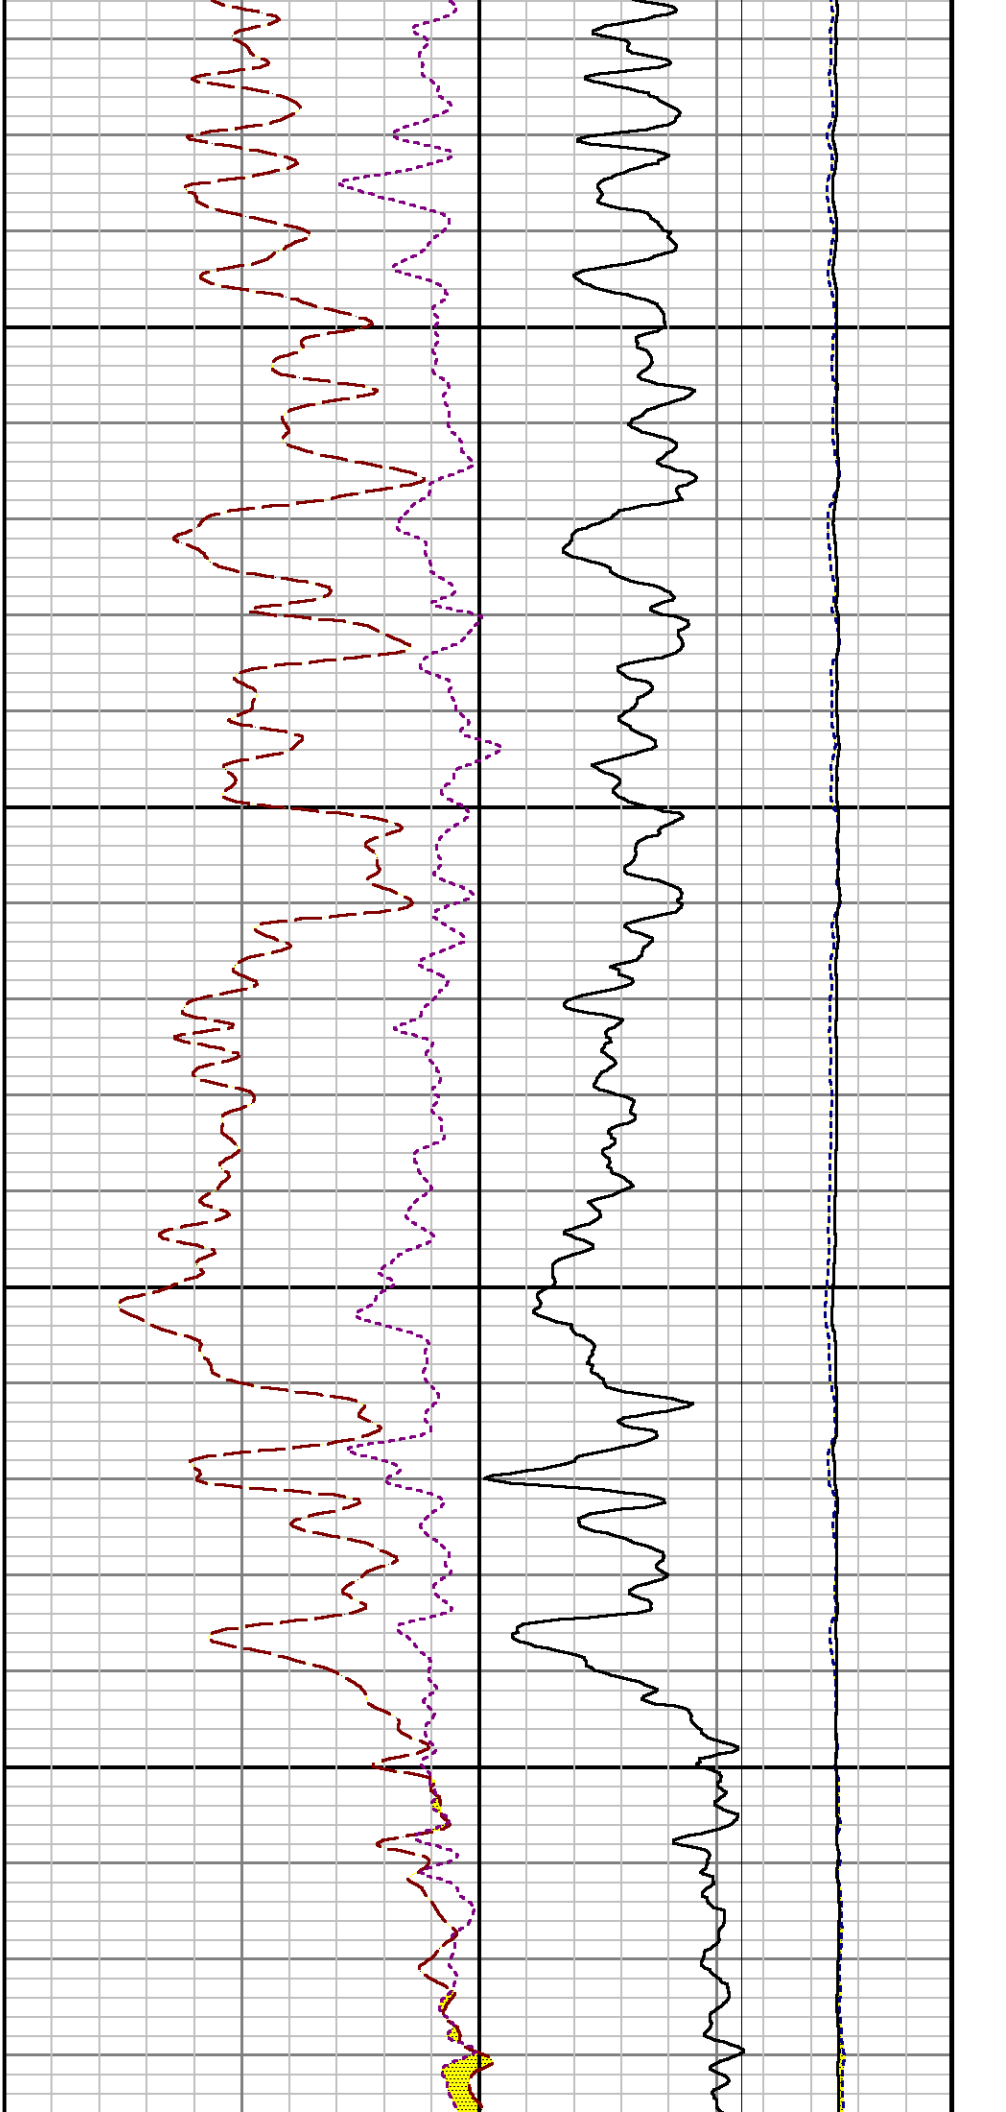

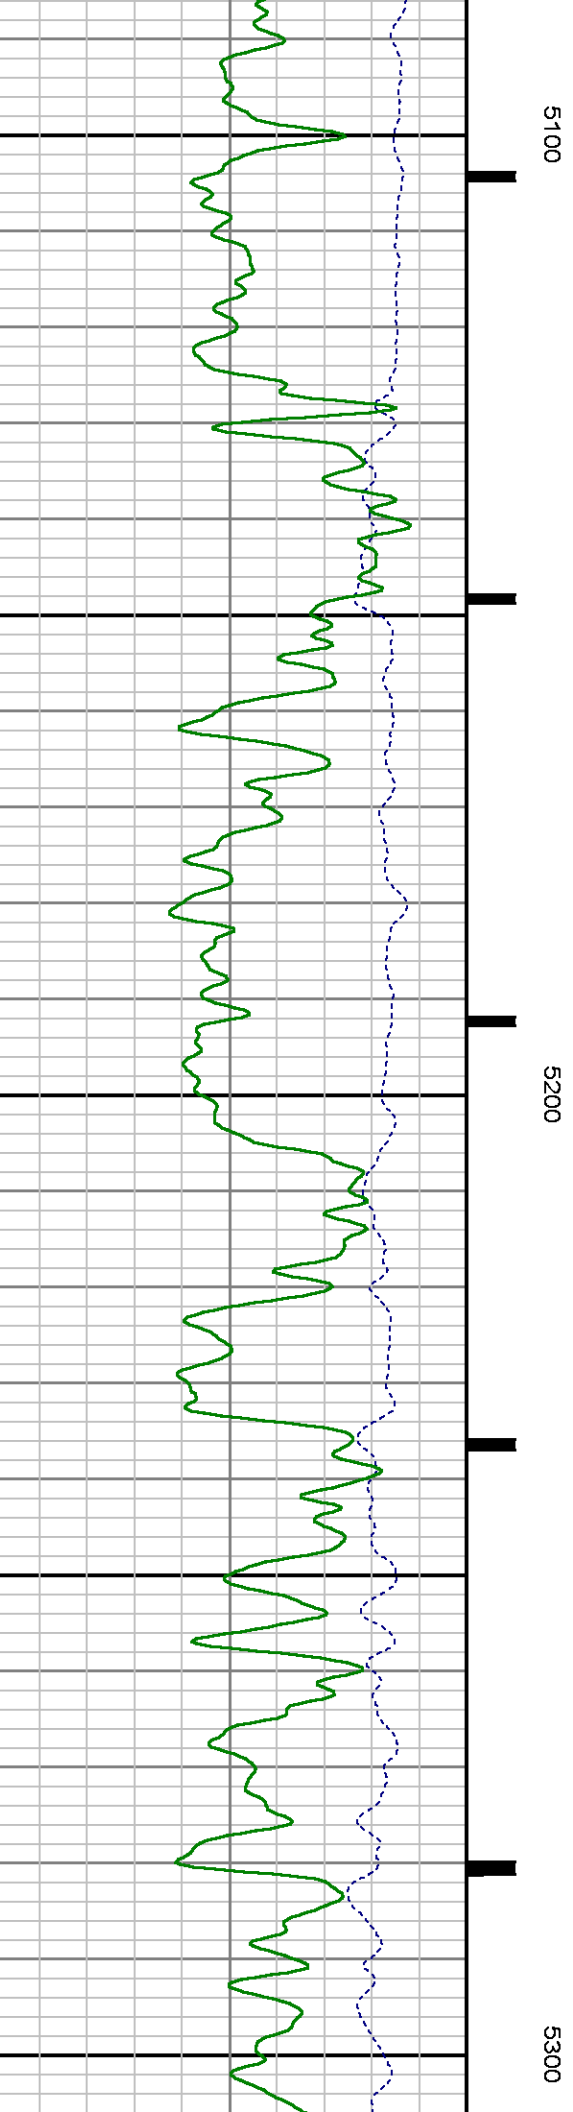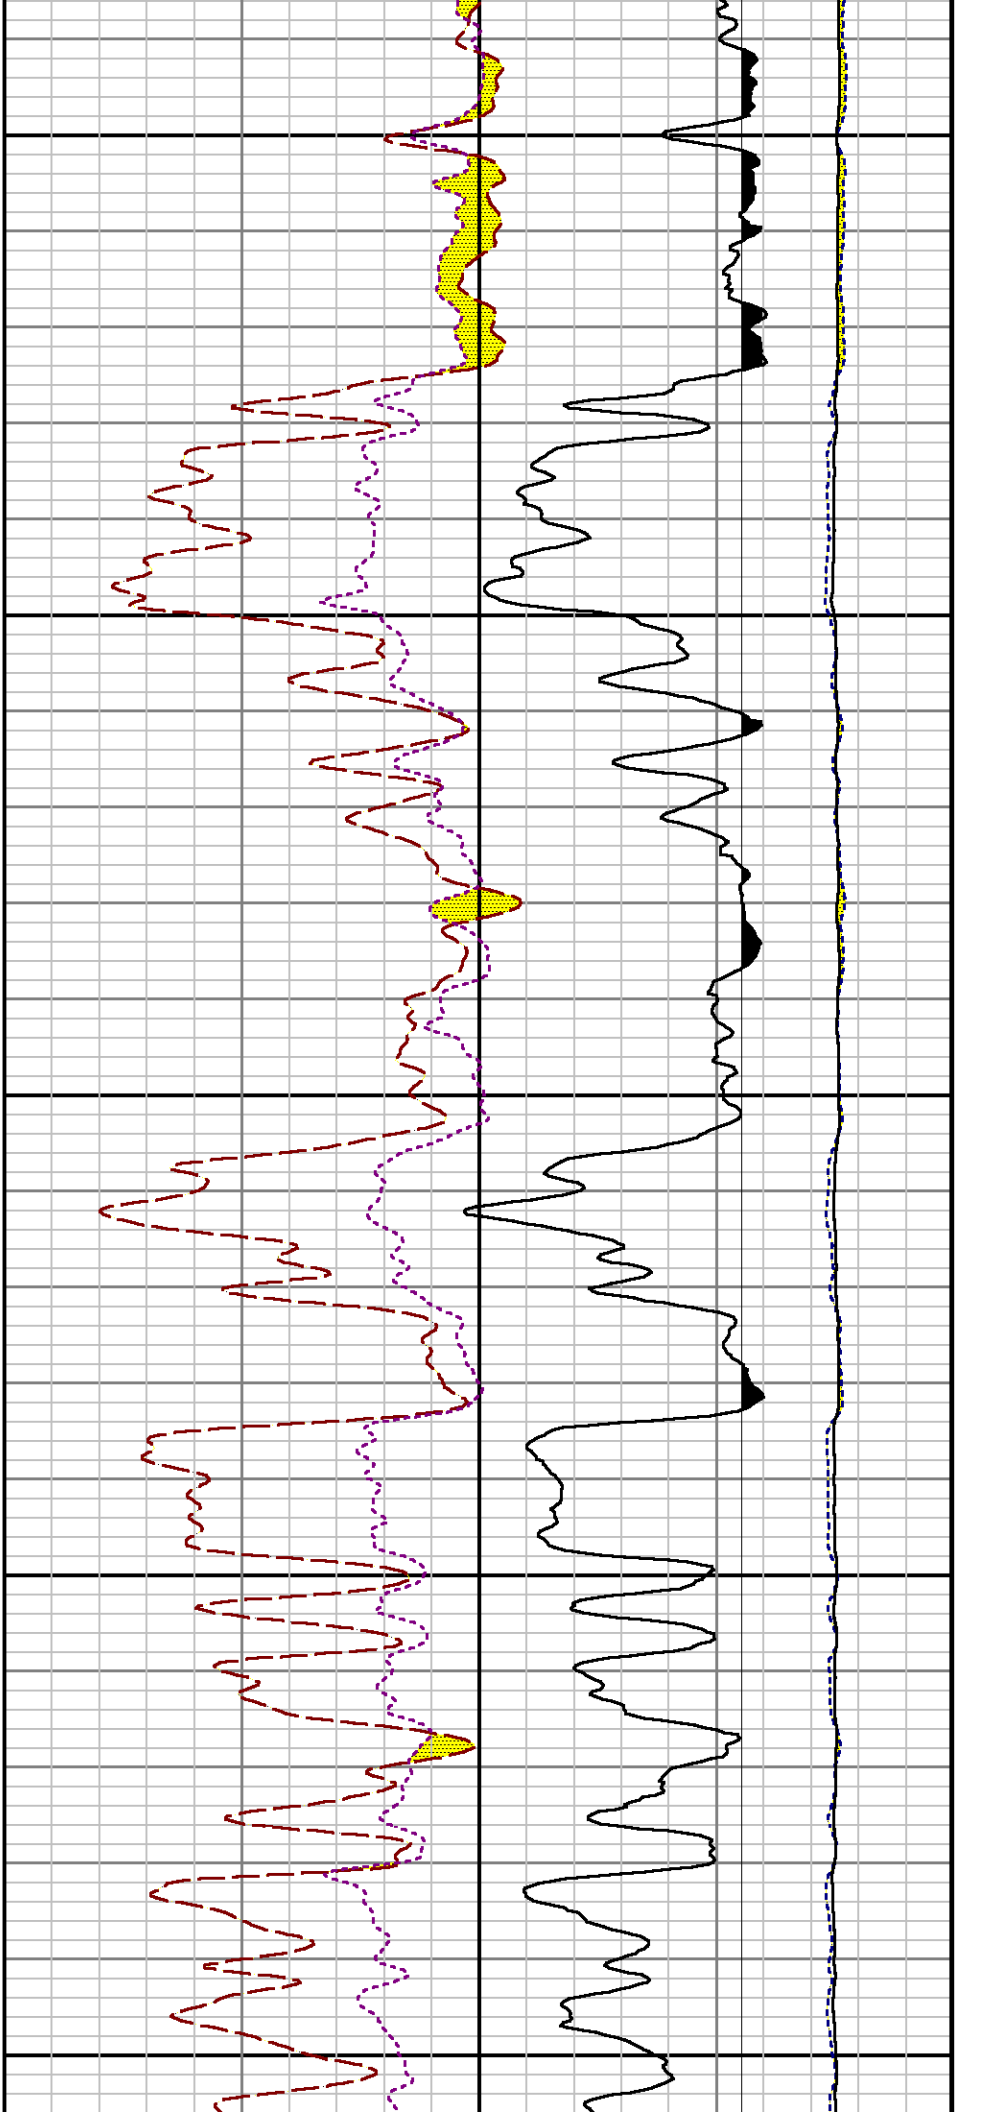

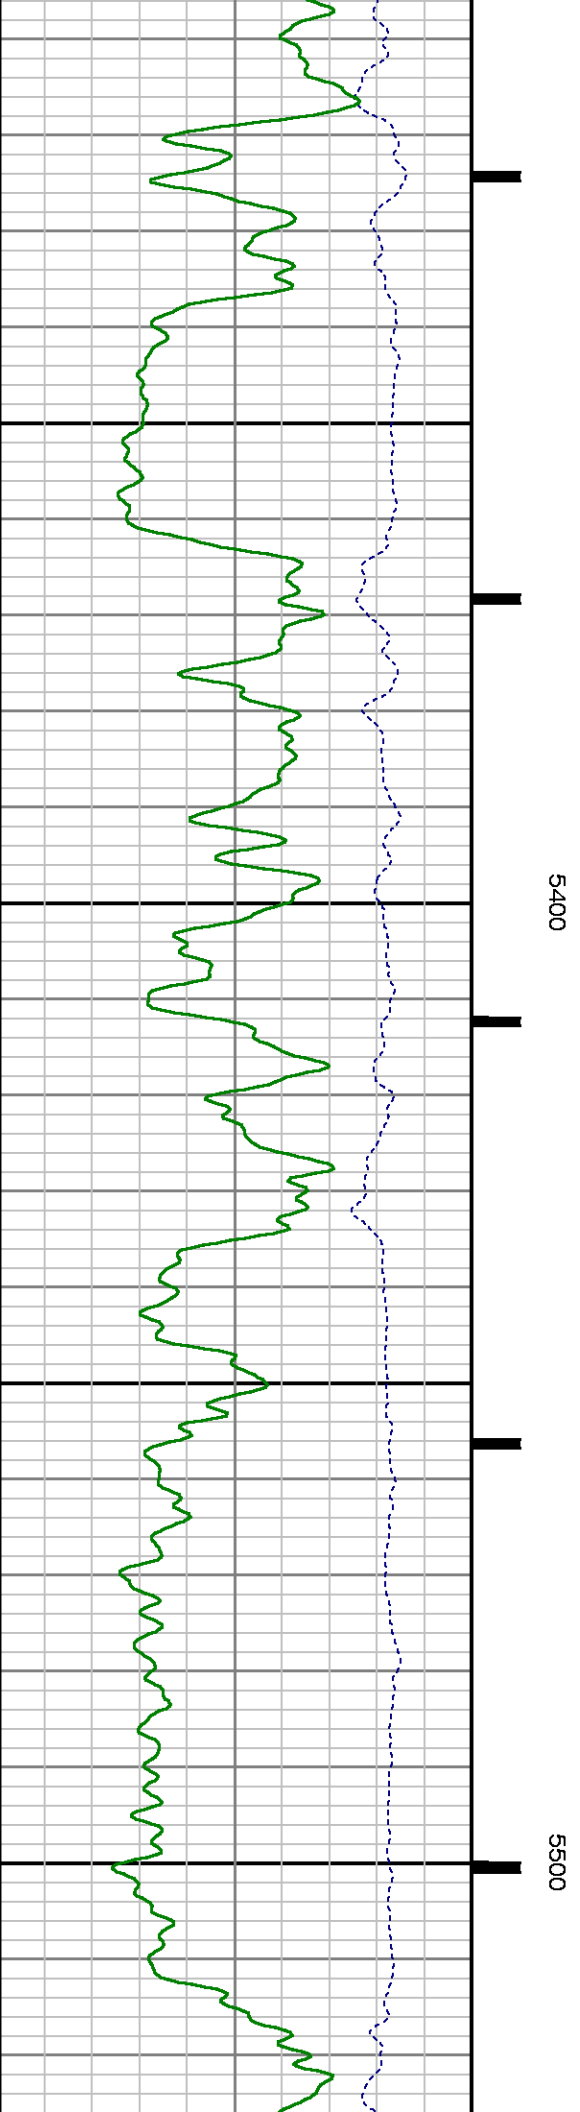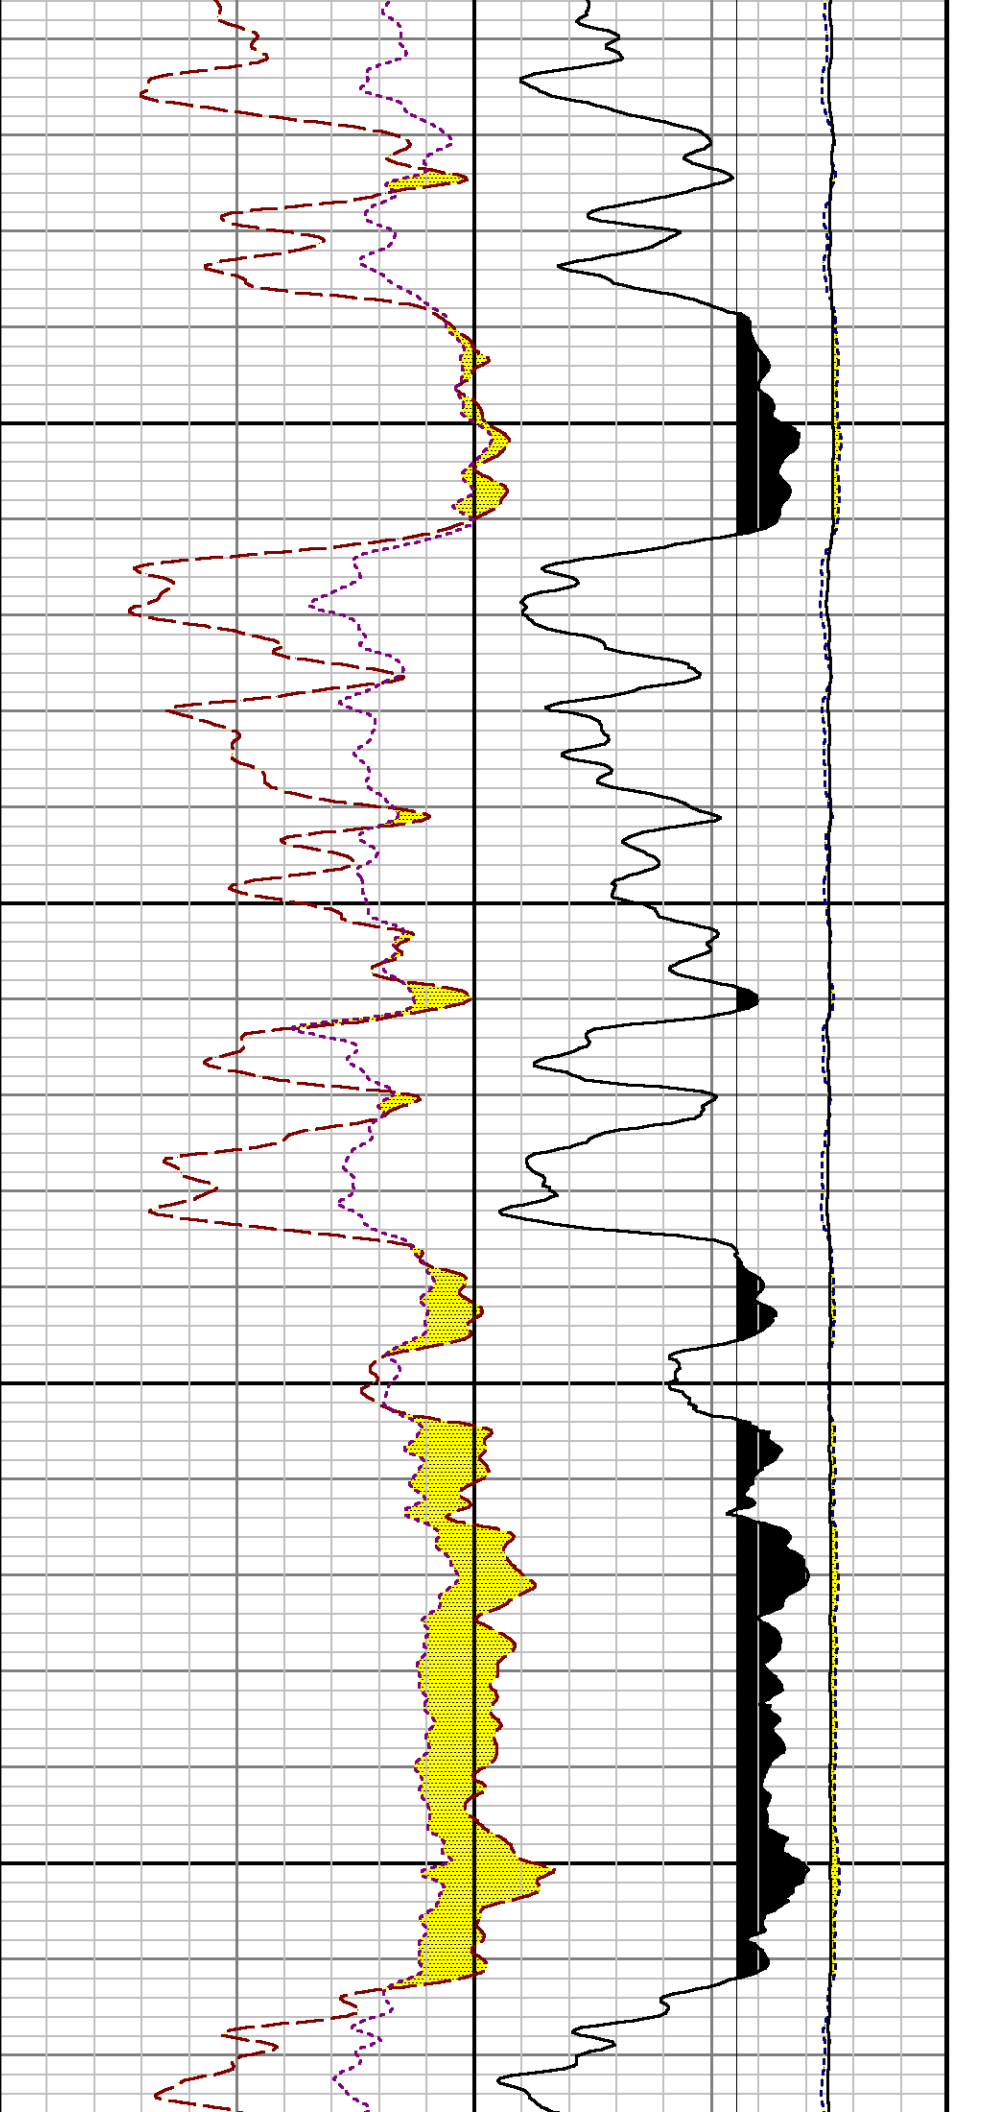


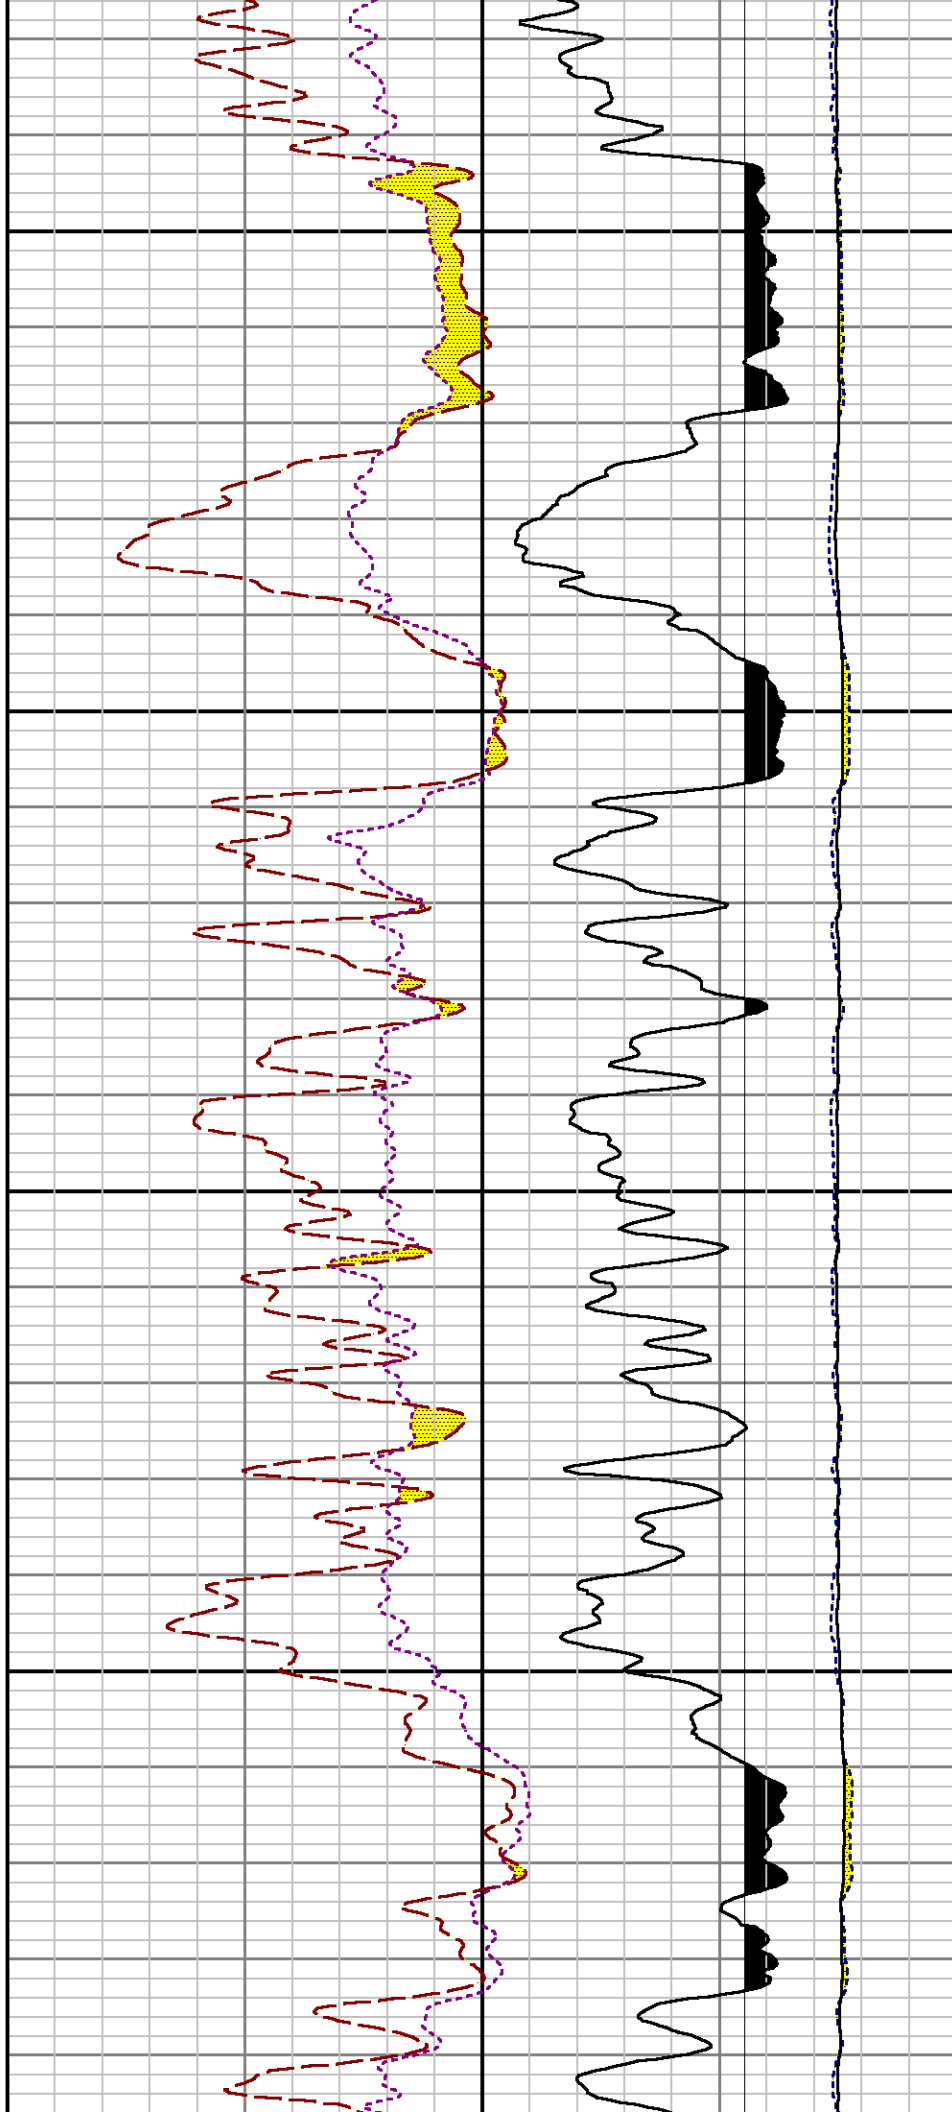



SHORT JOINT



5600



5700


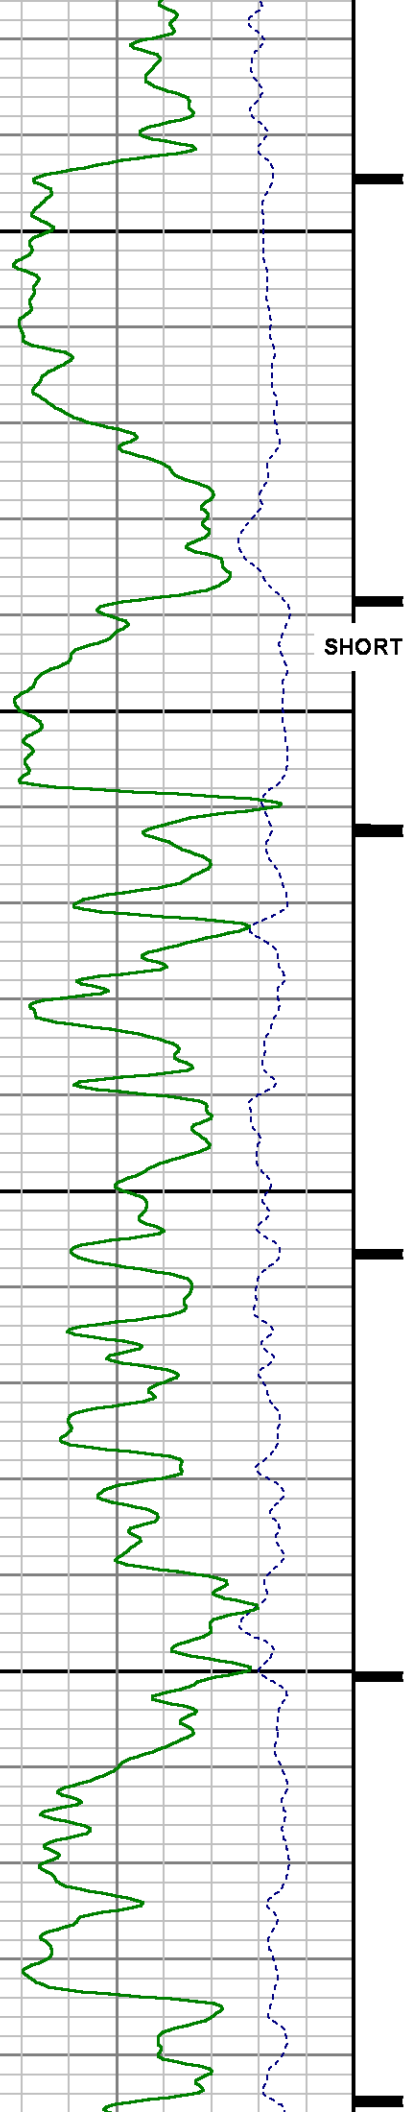





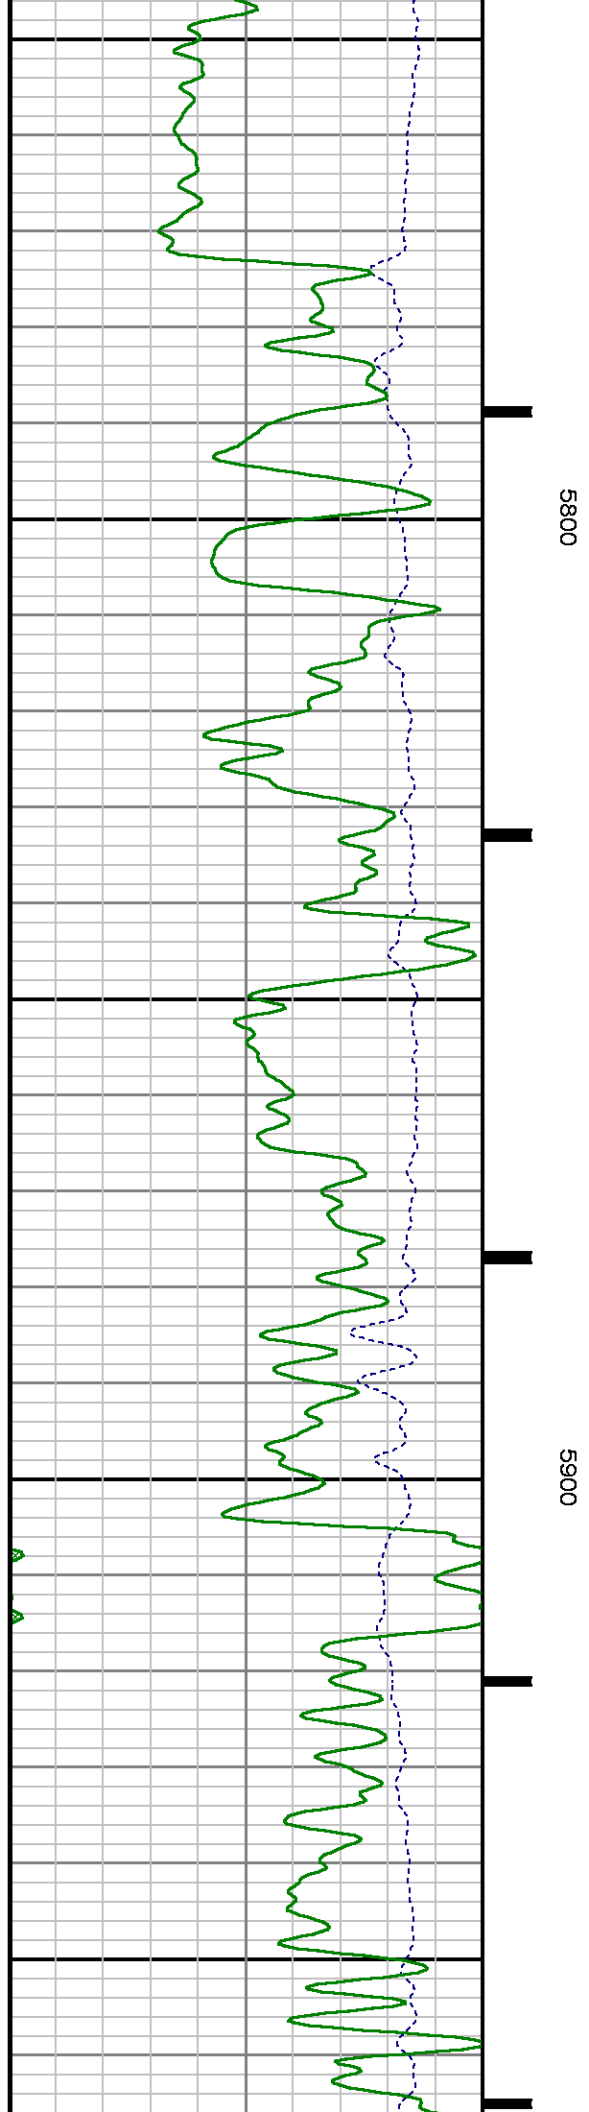
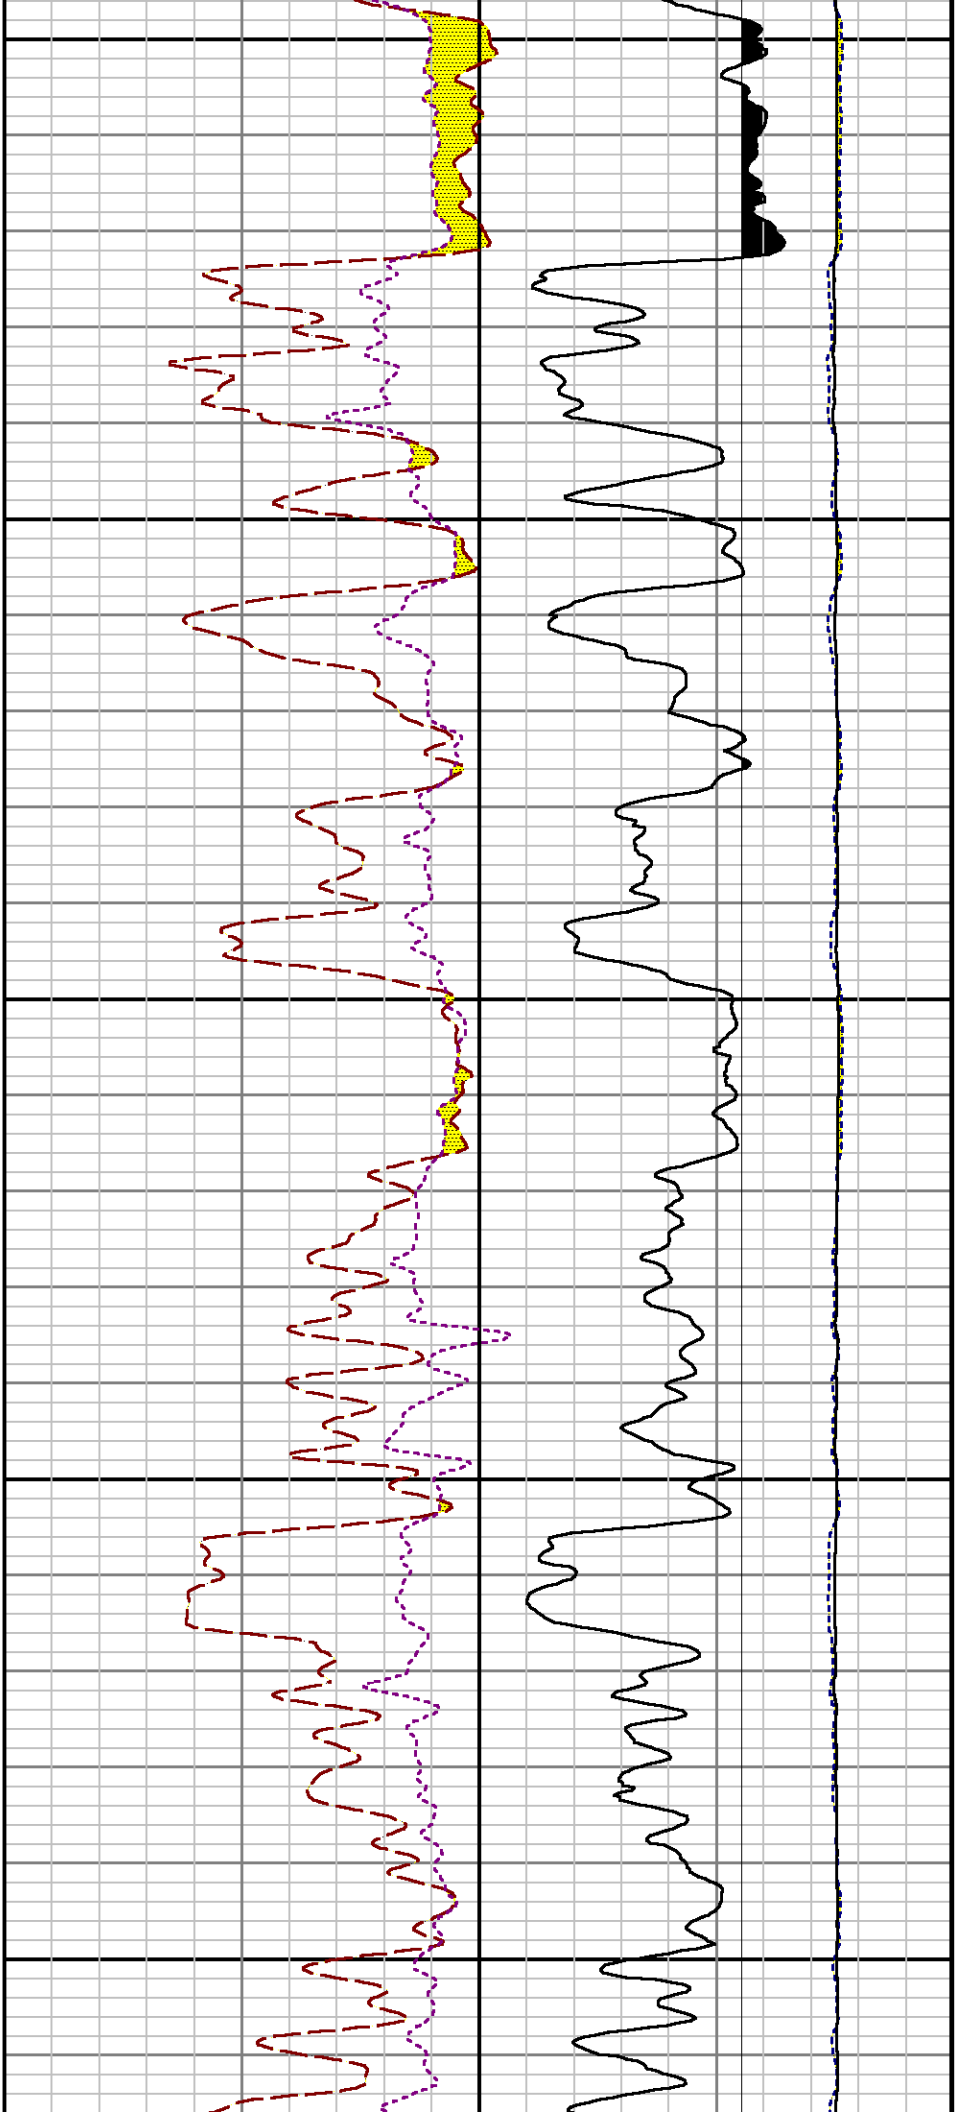


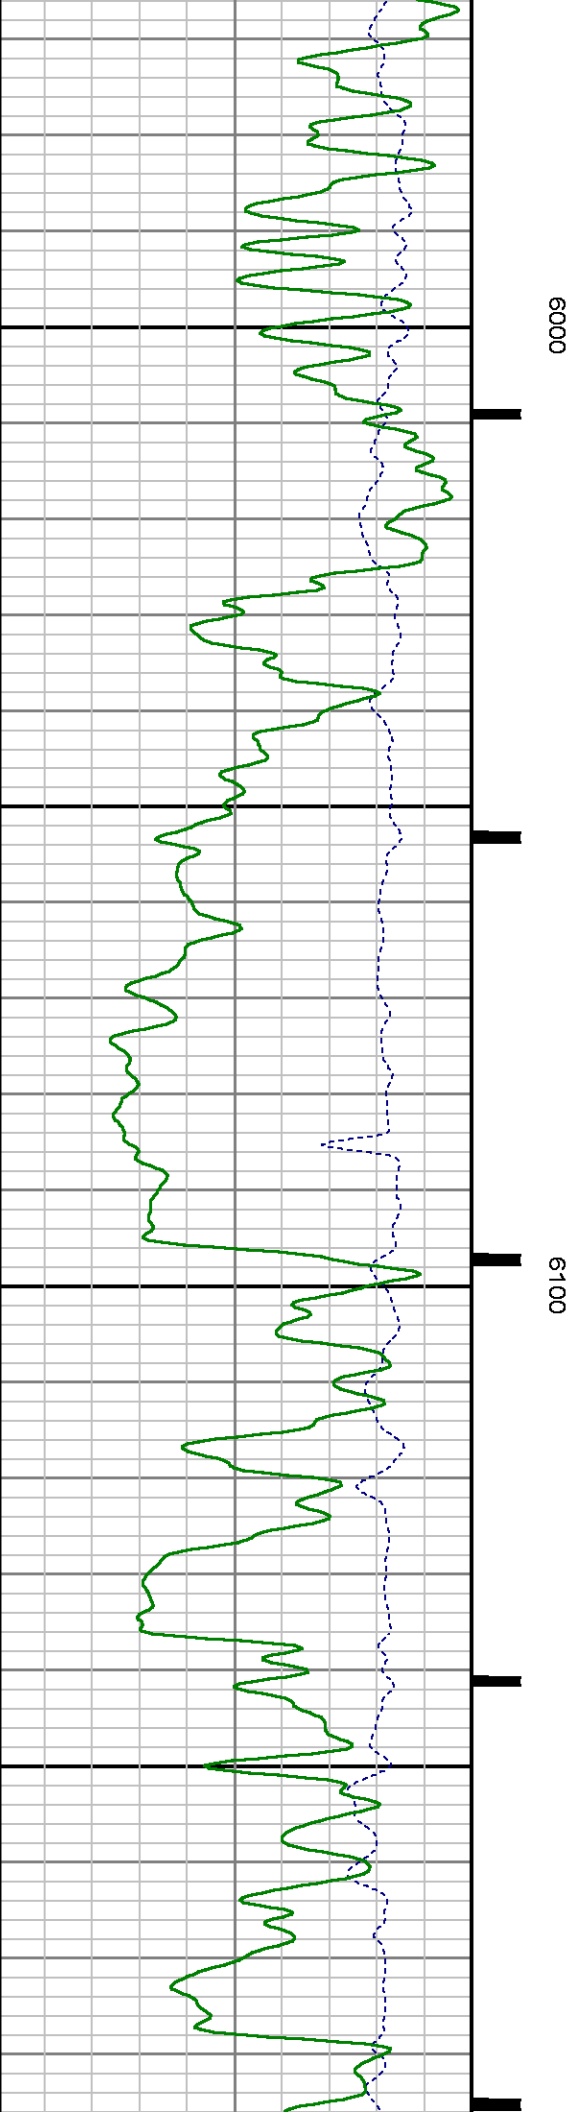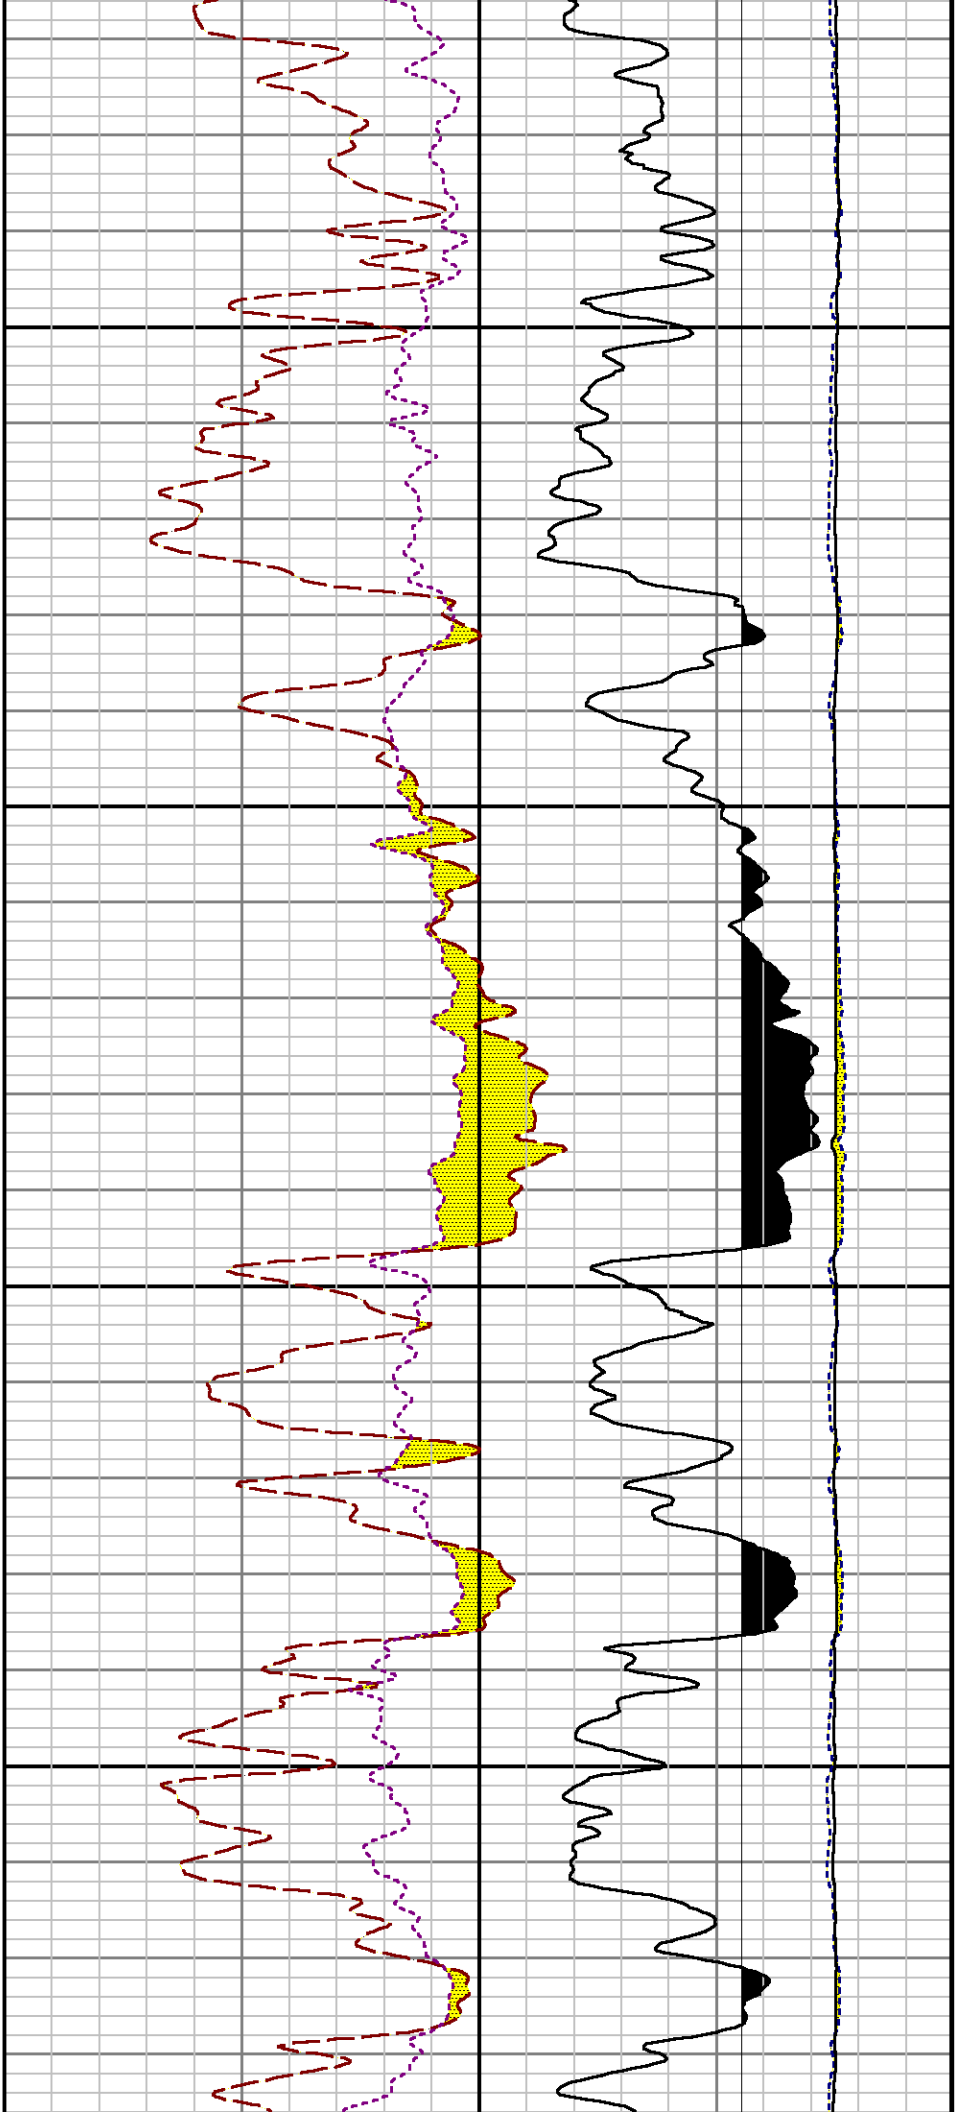


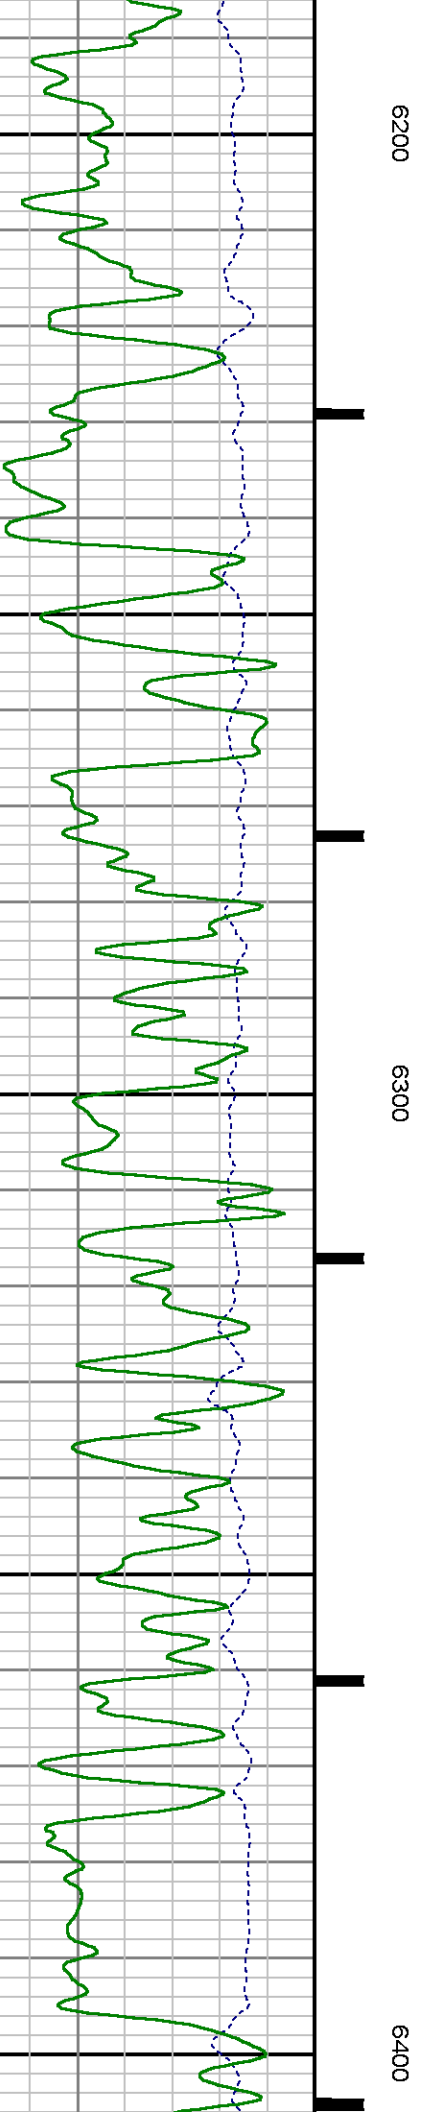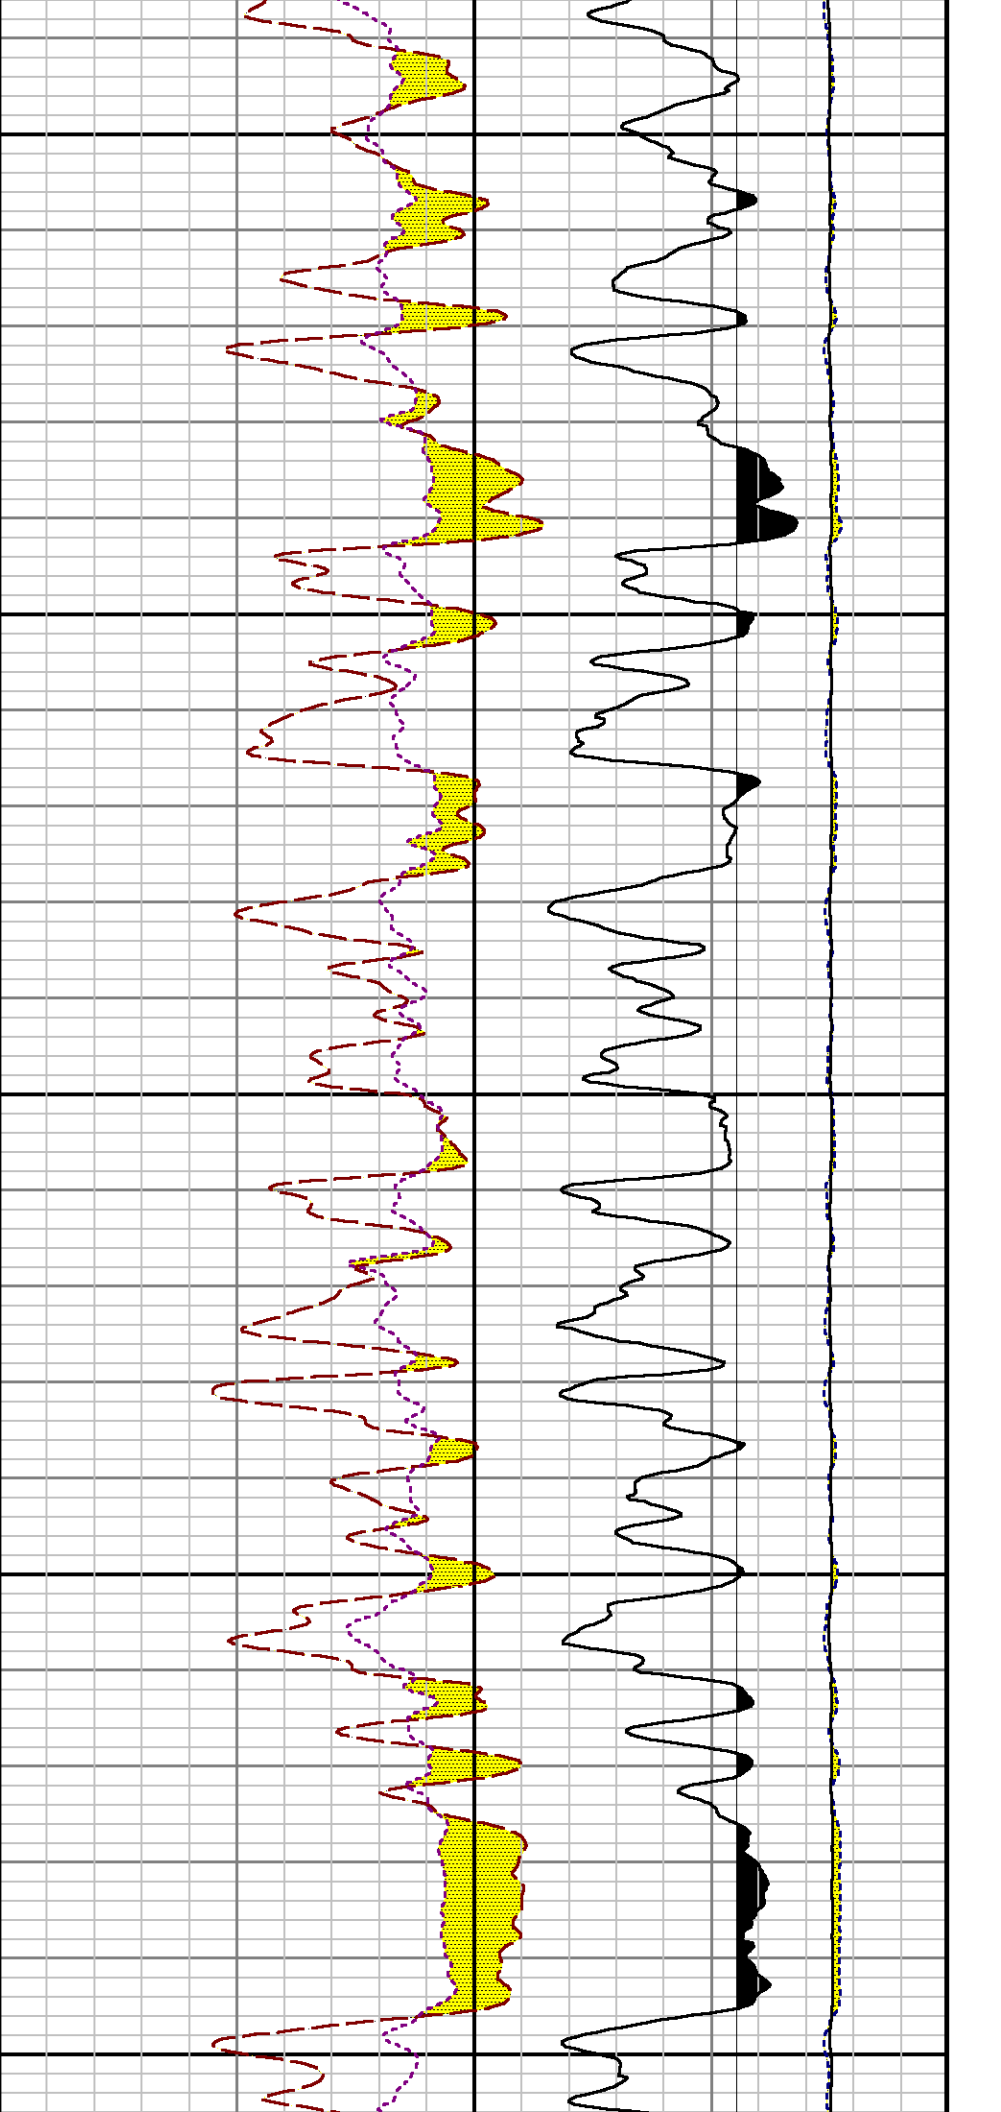

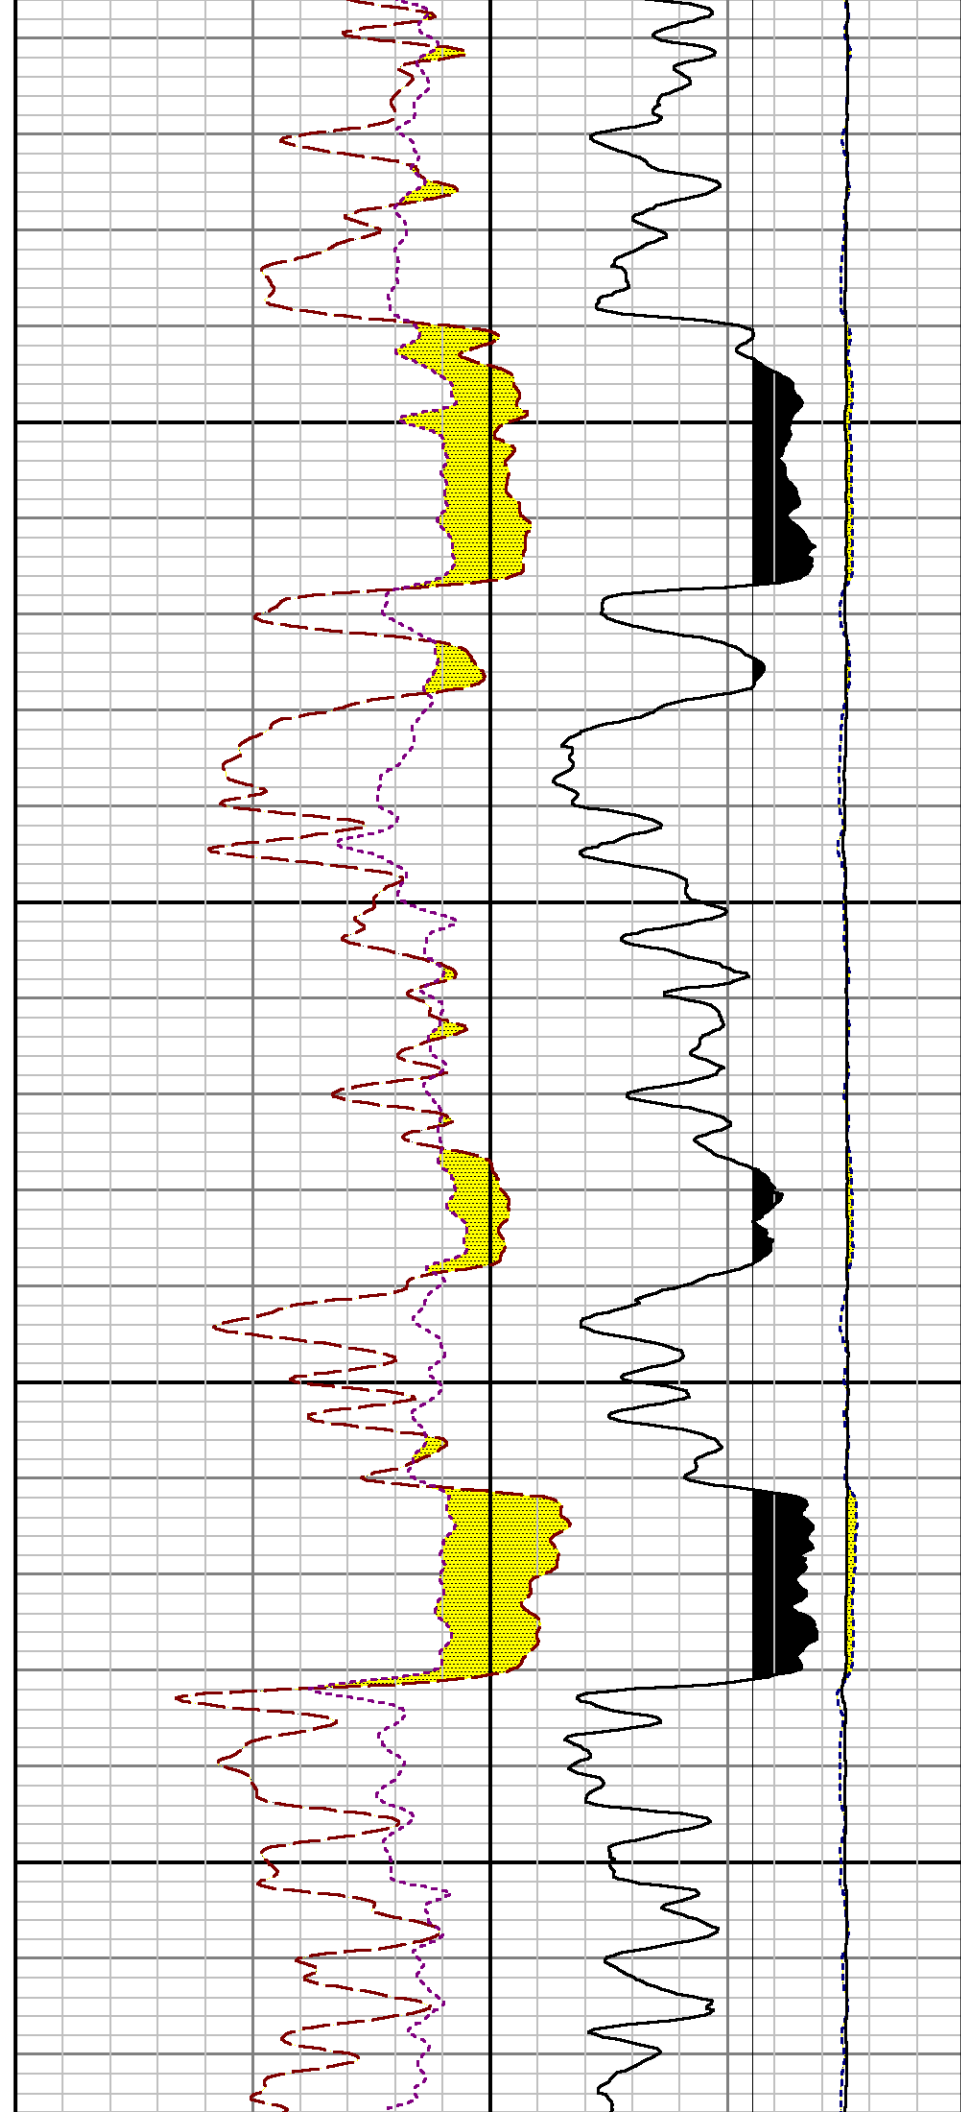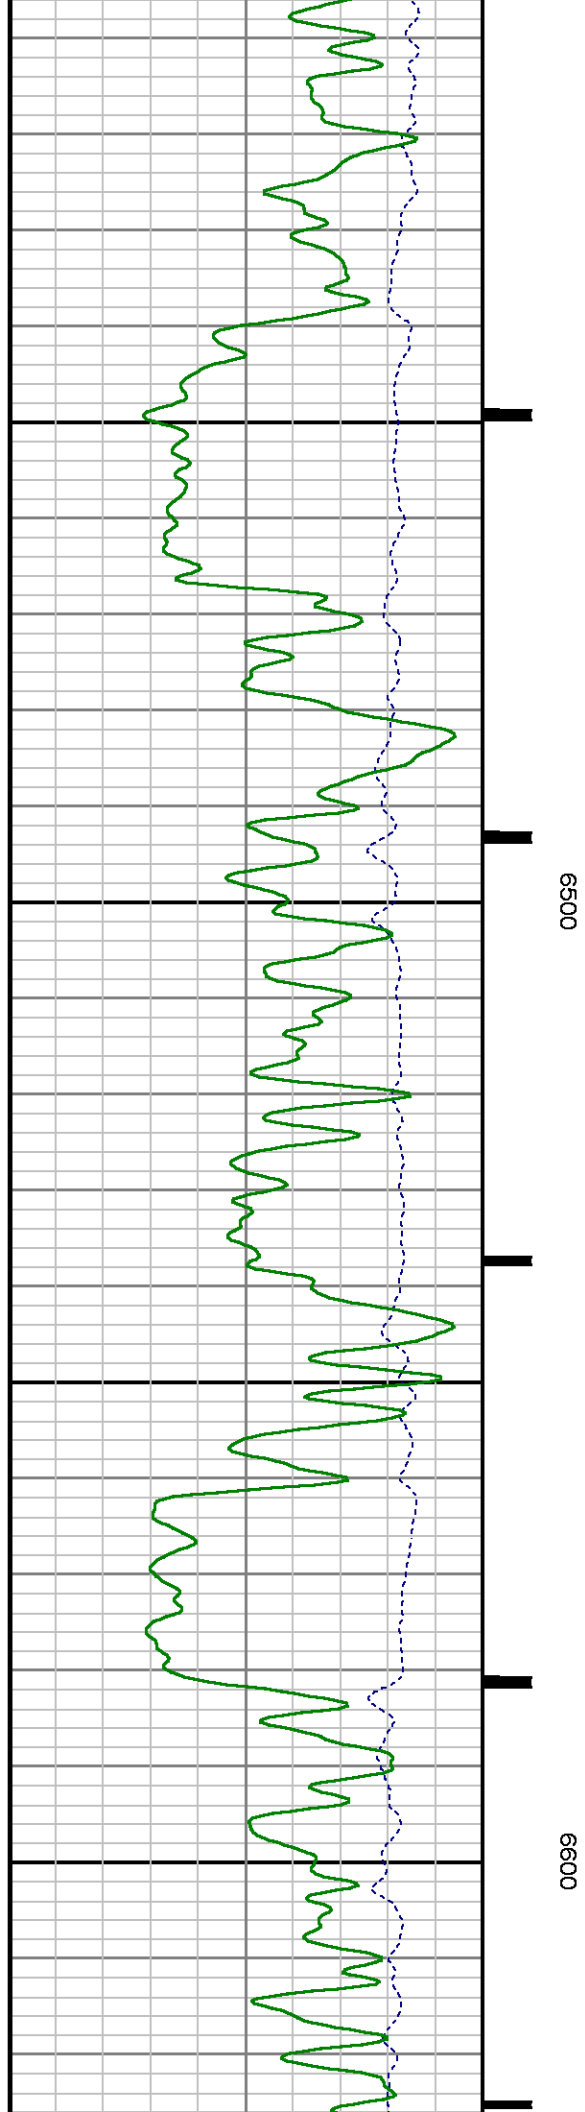

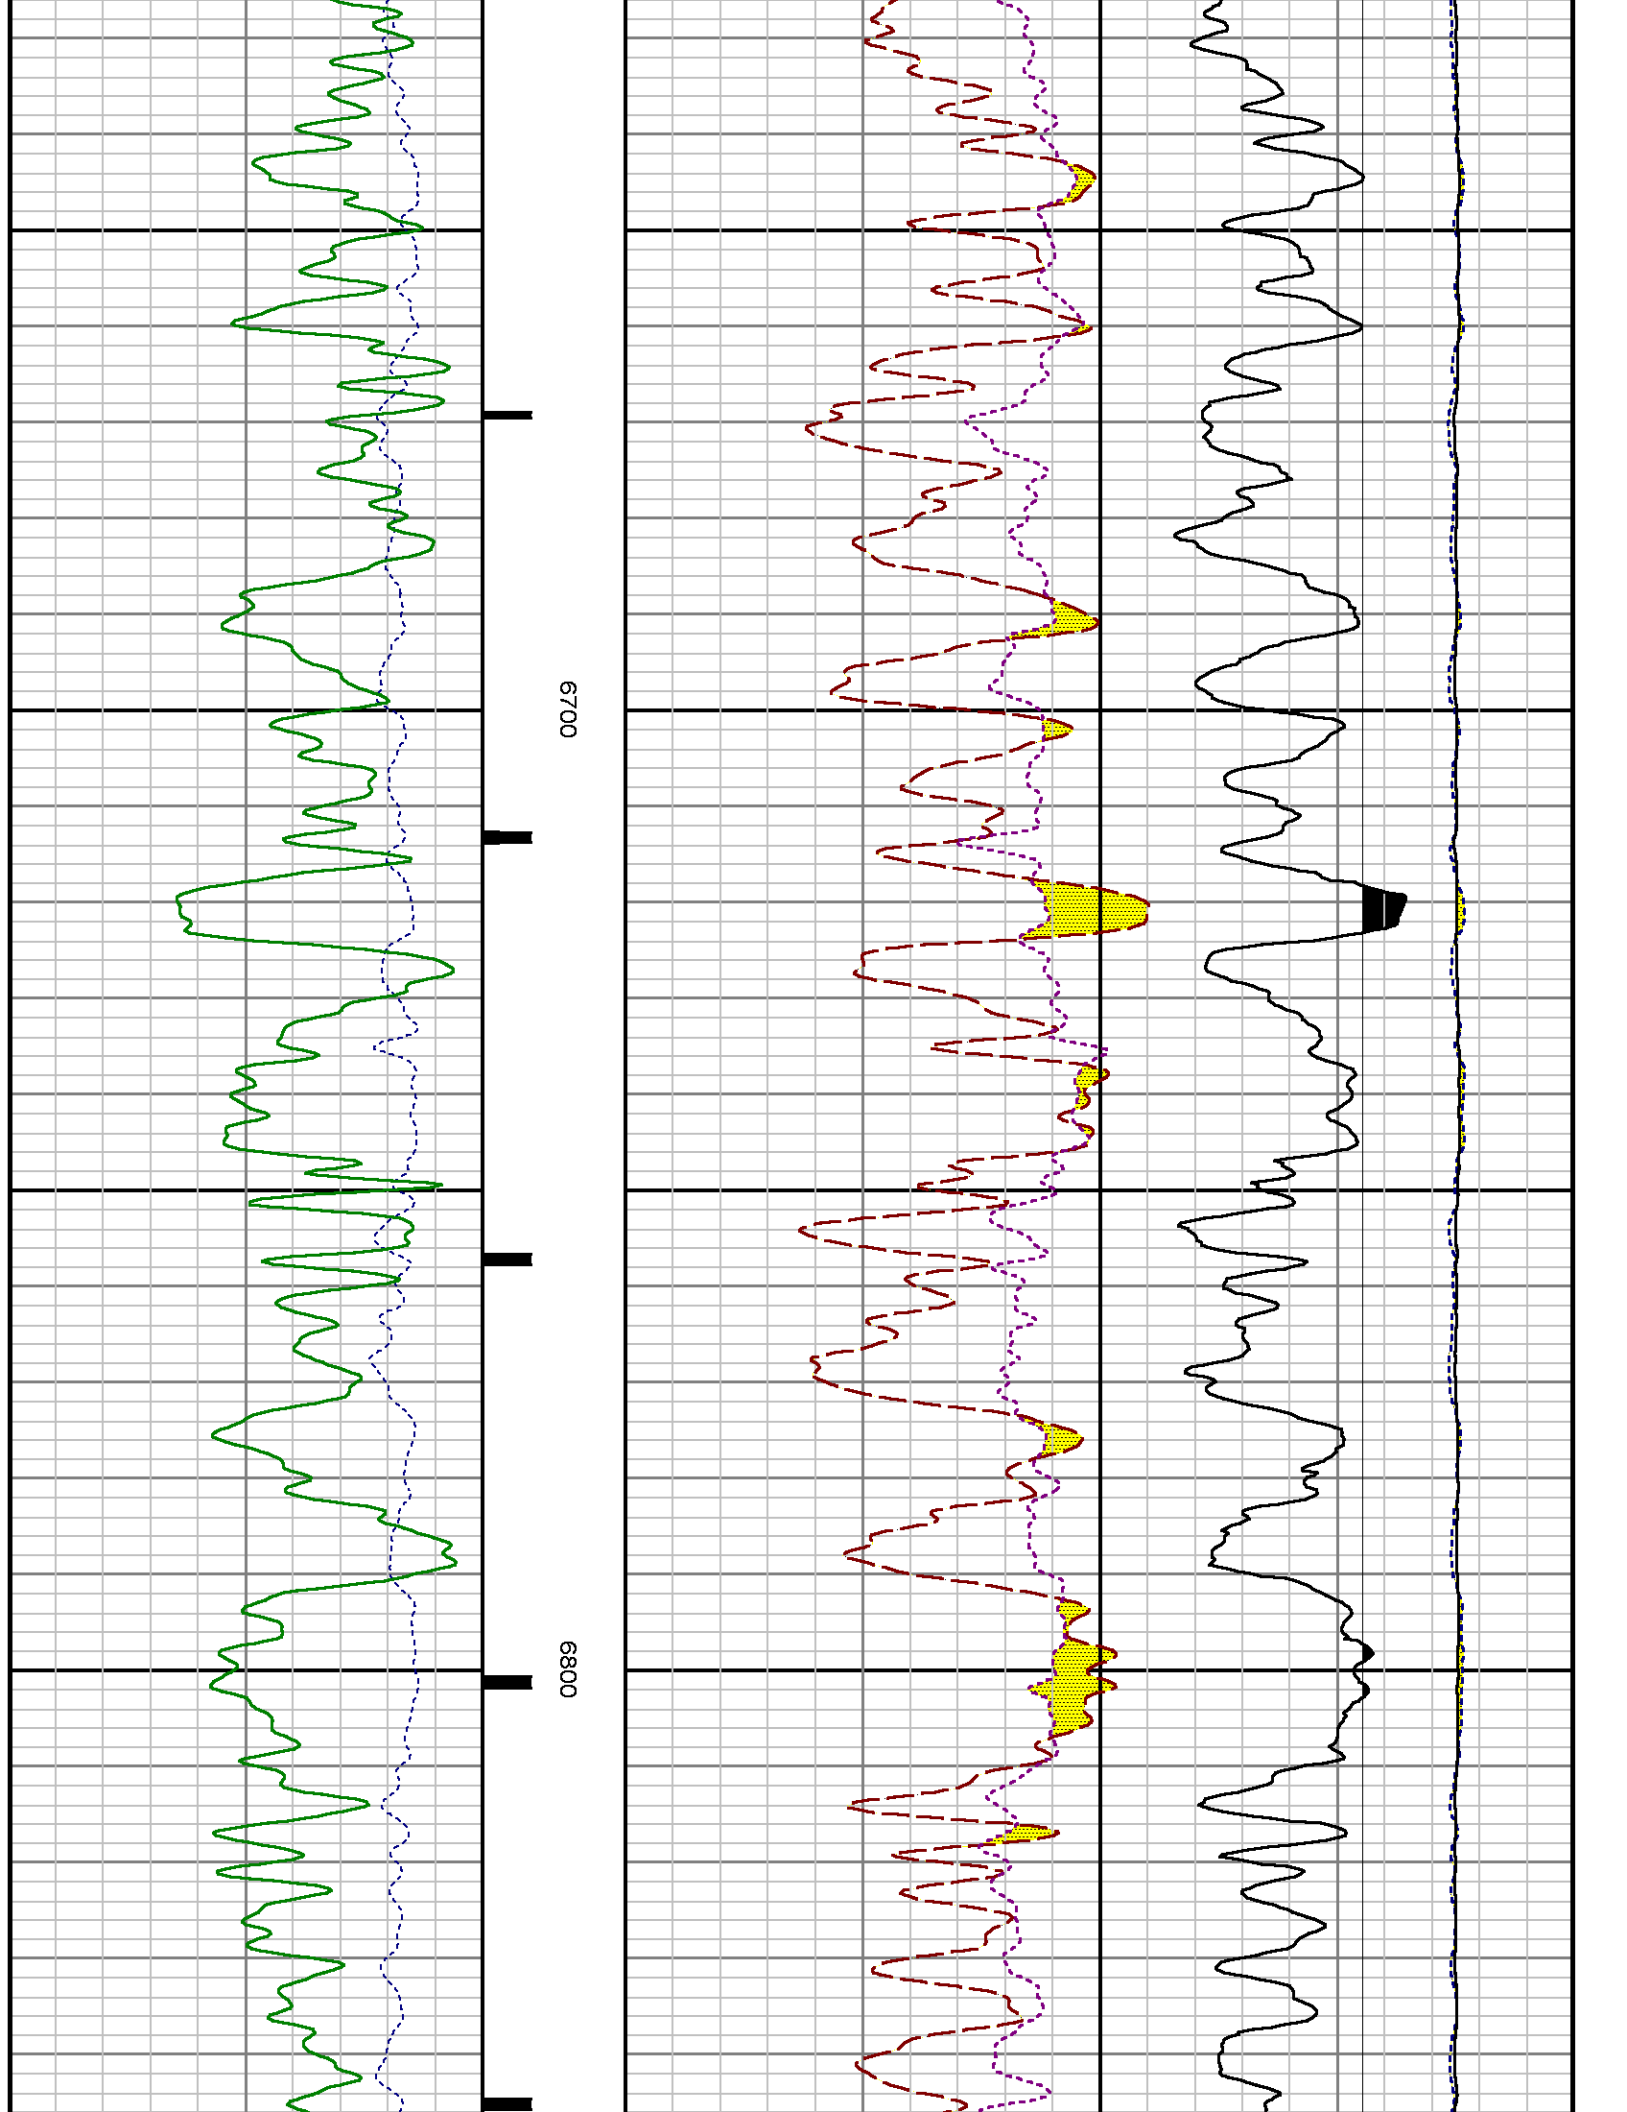


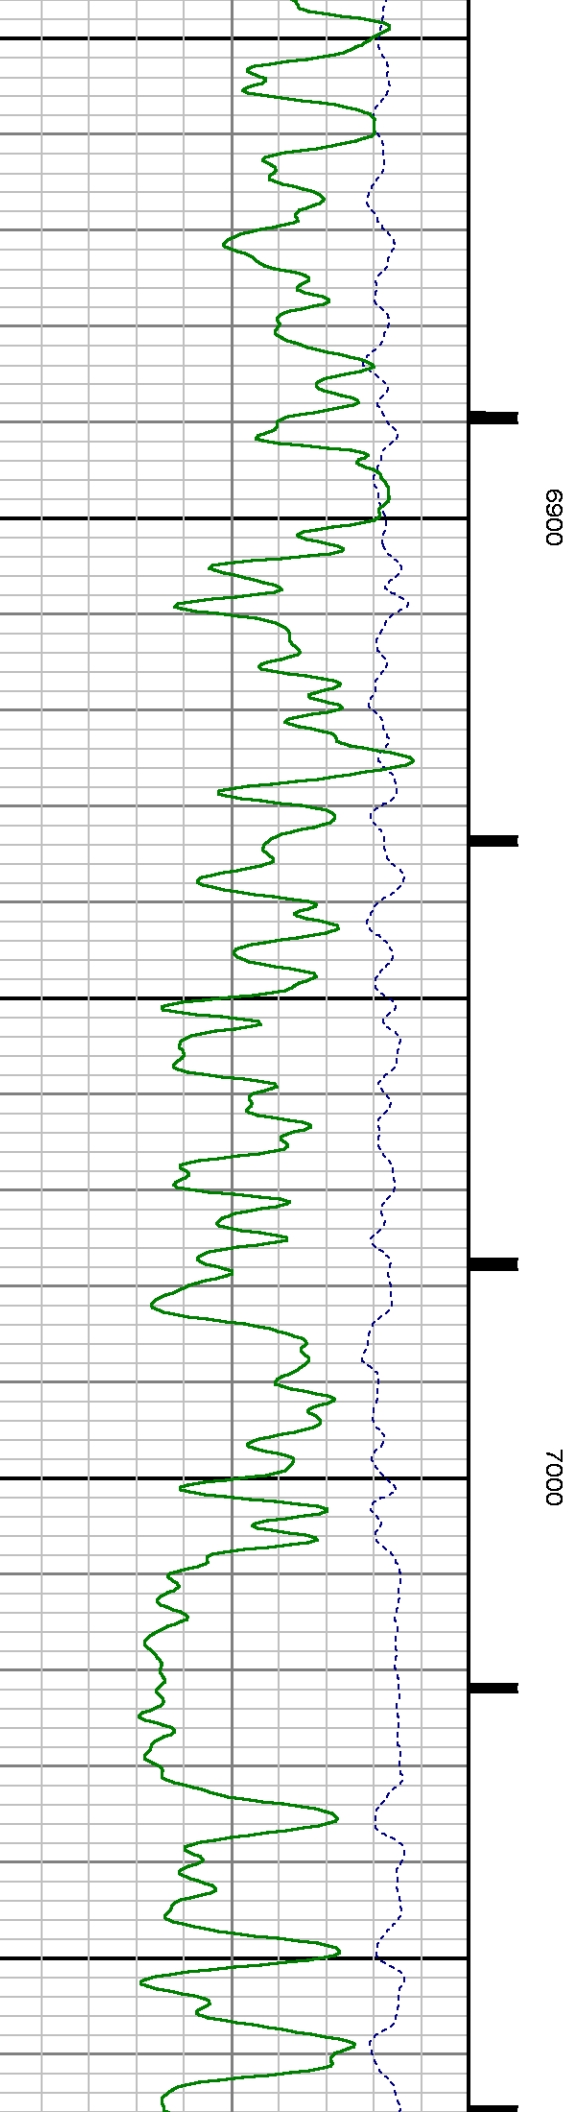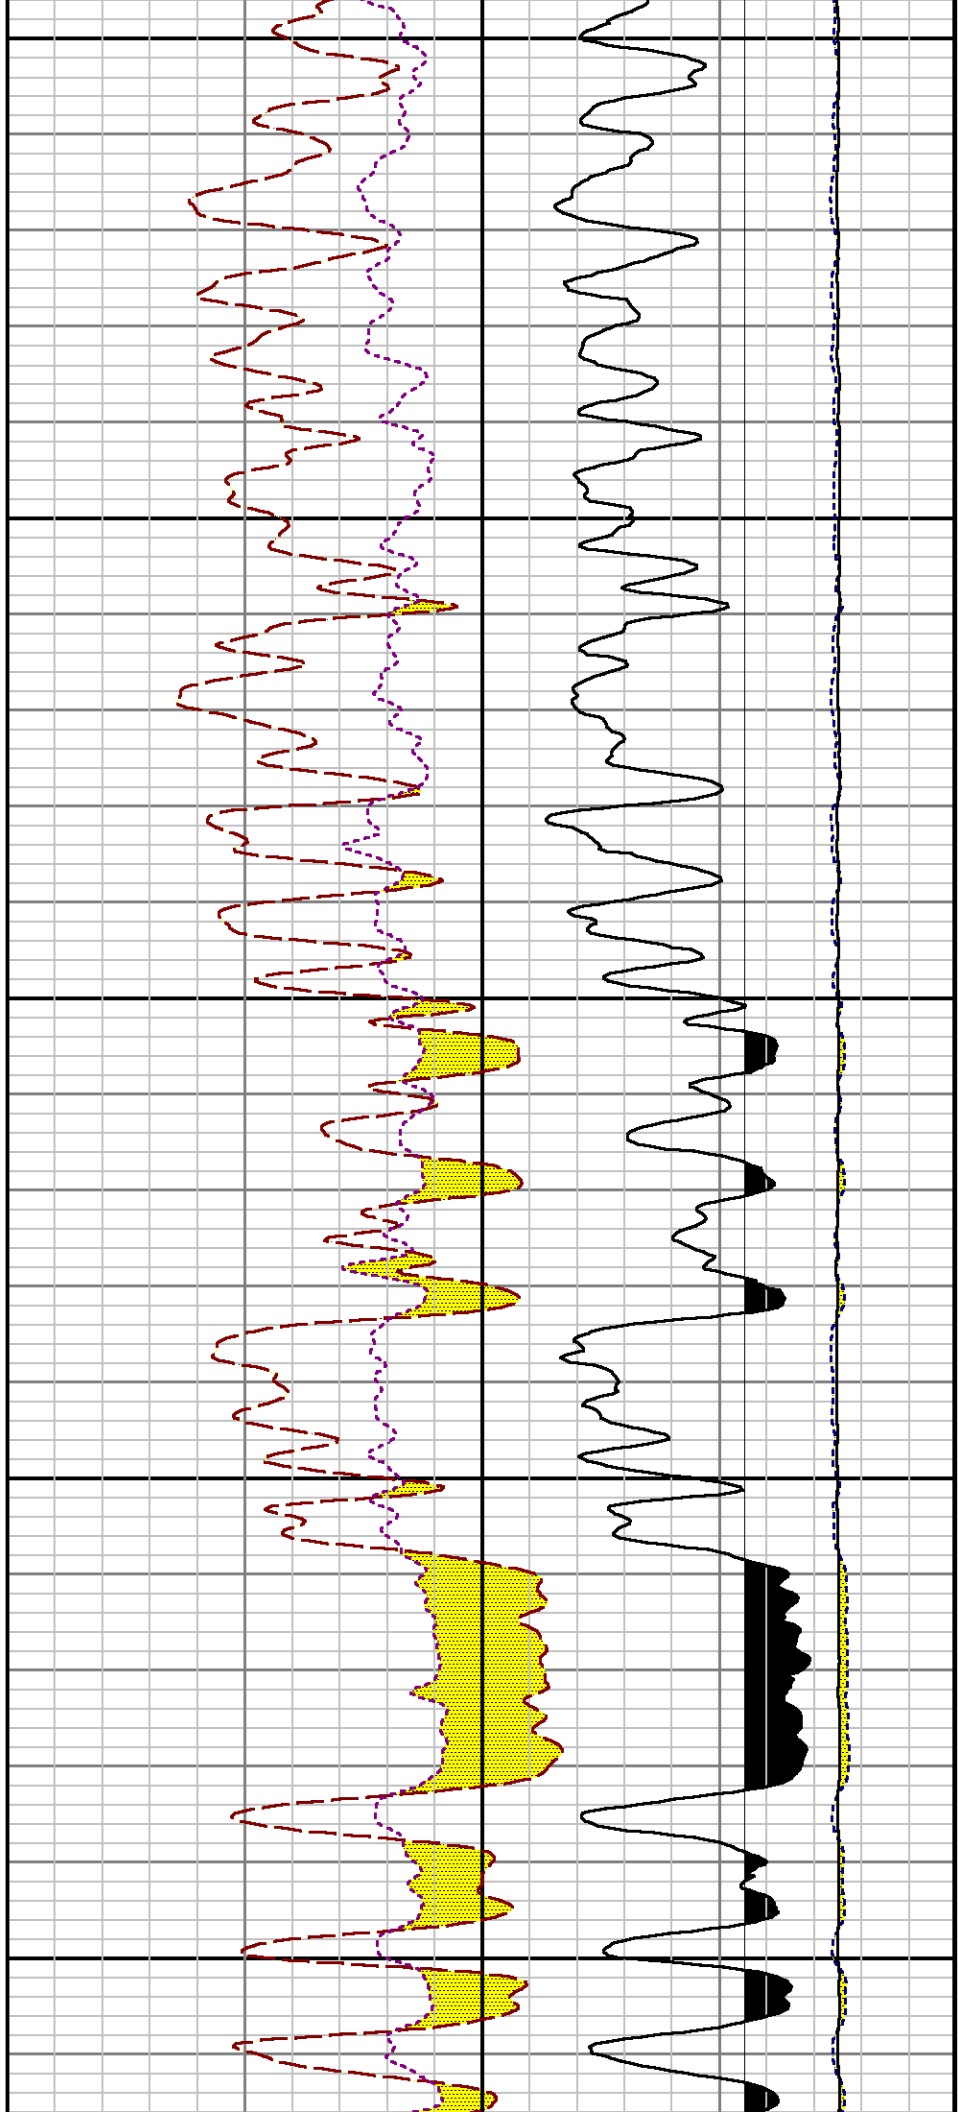


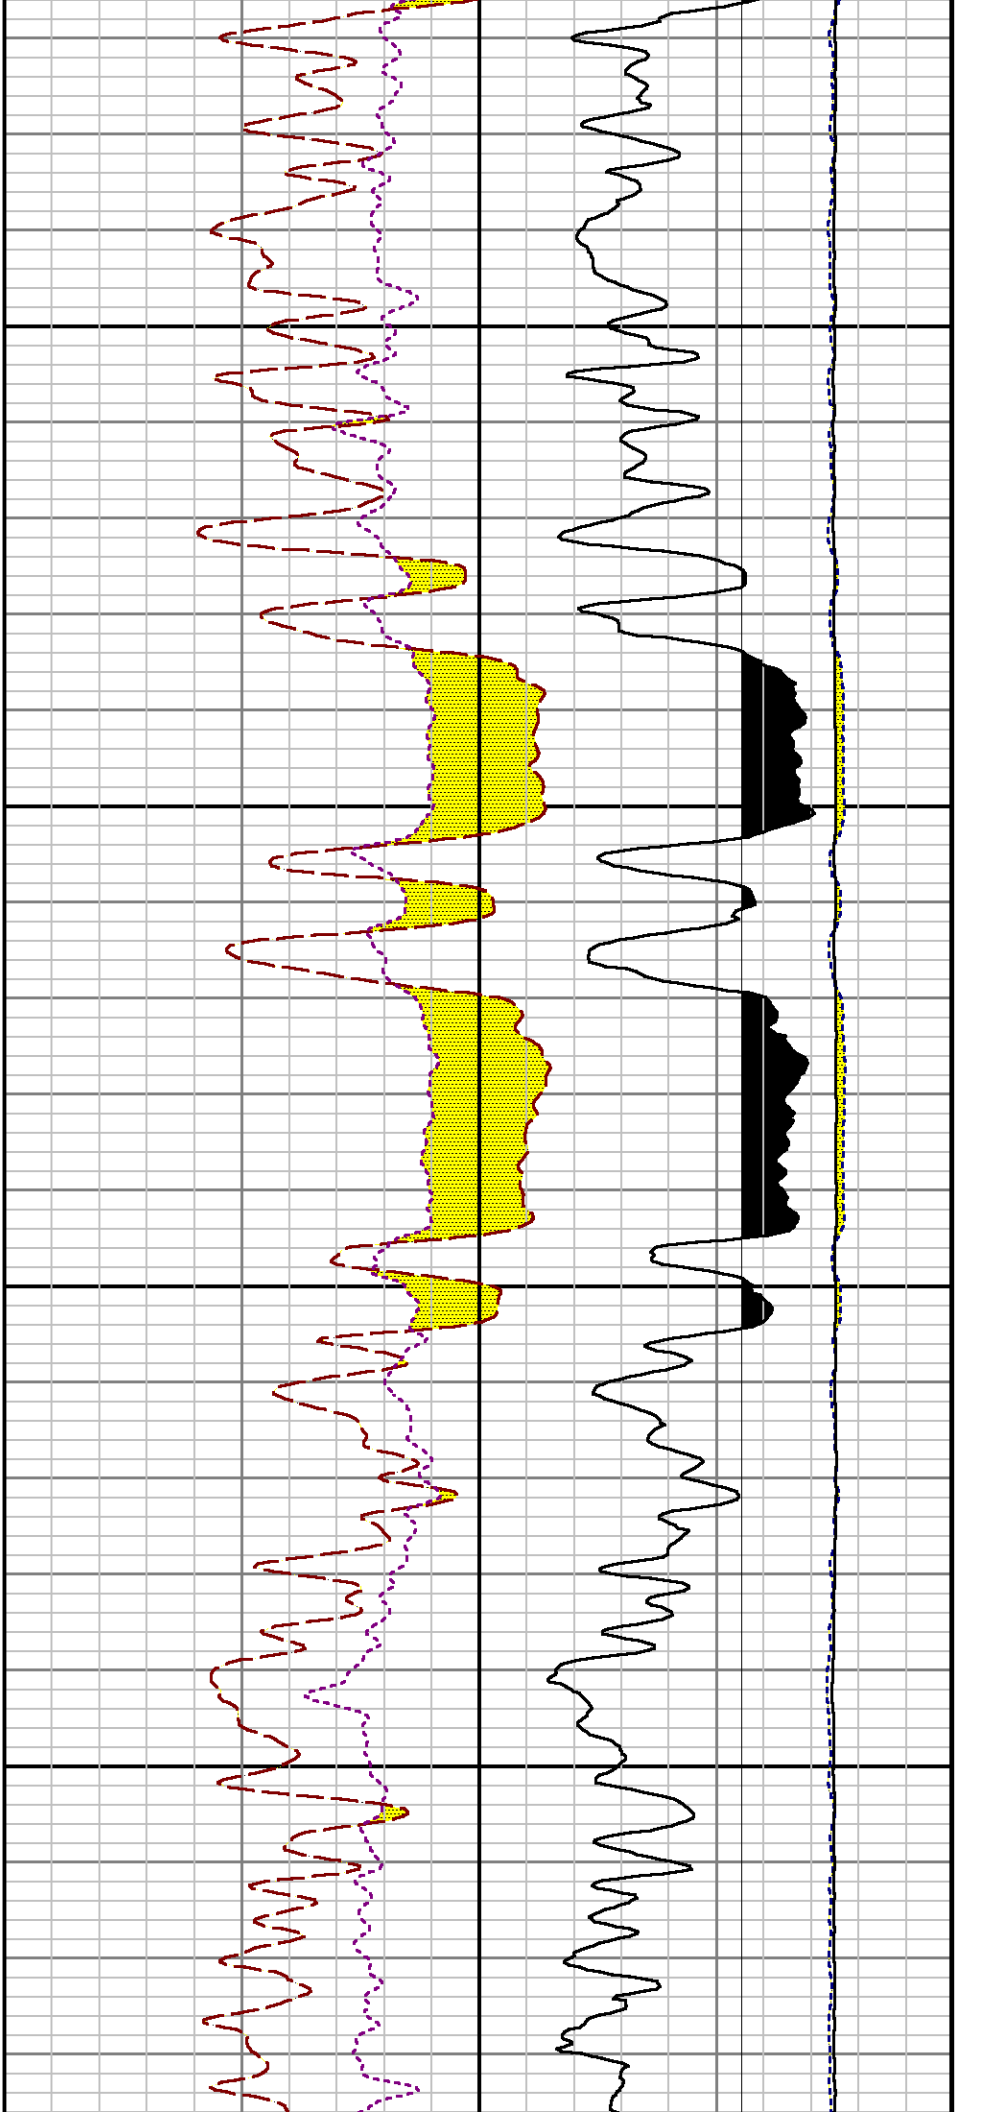

7100

7200

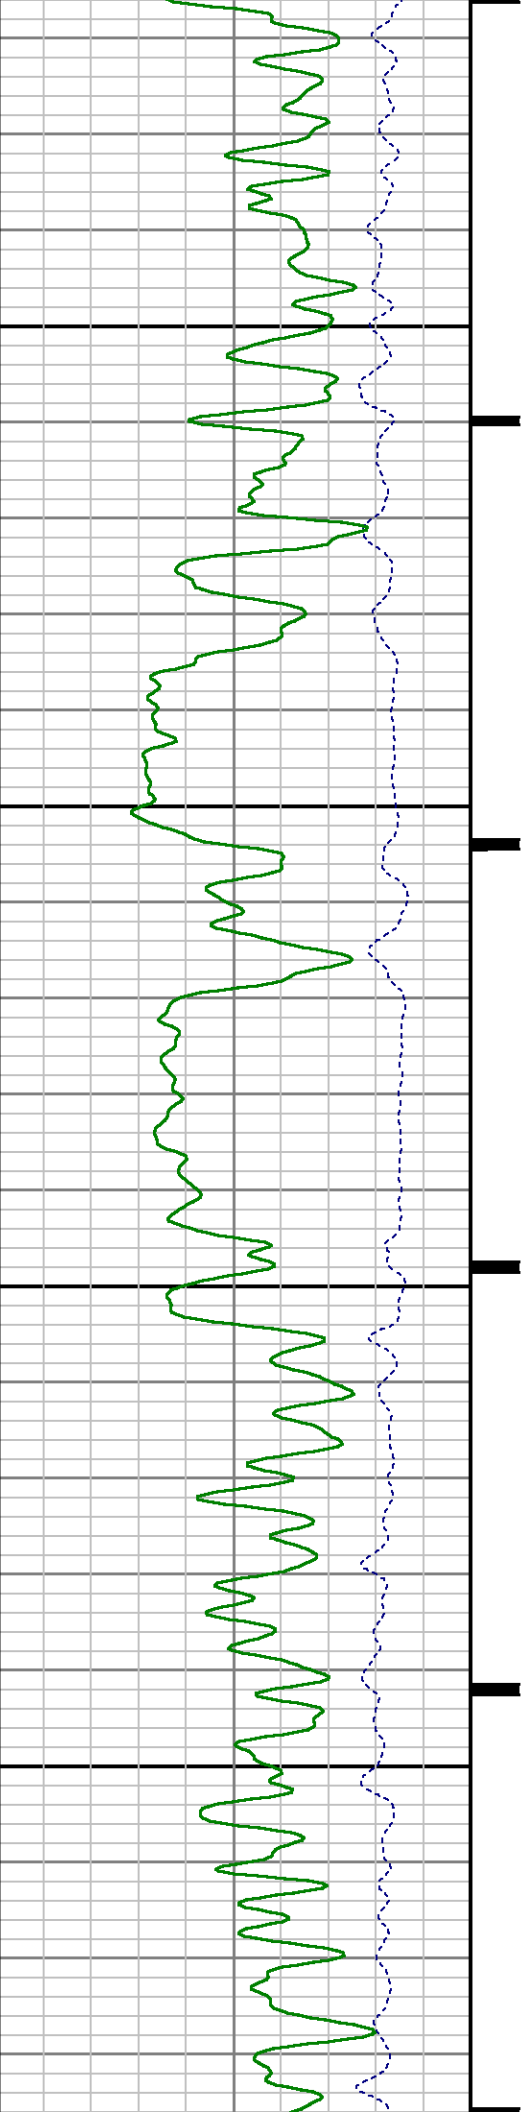


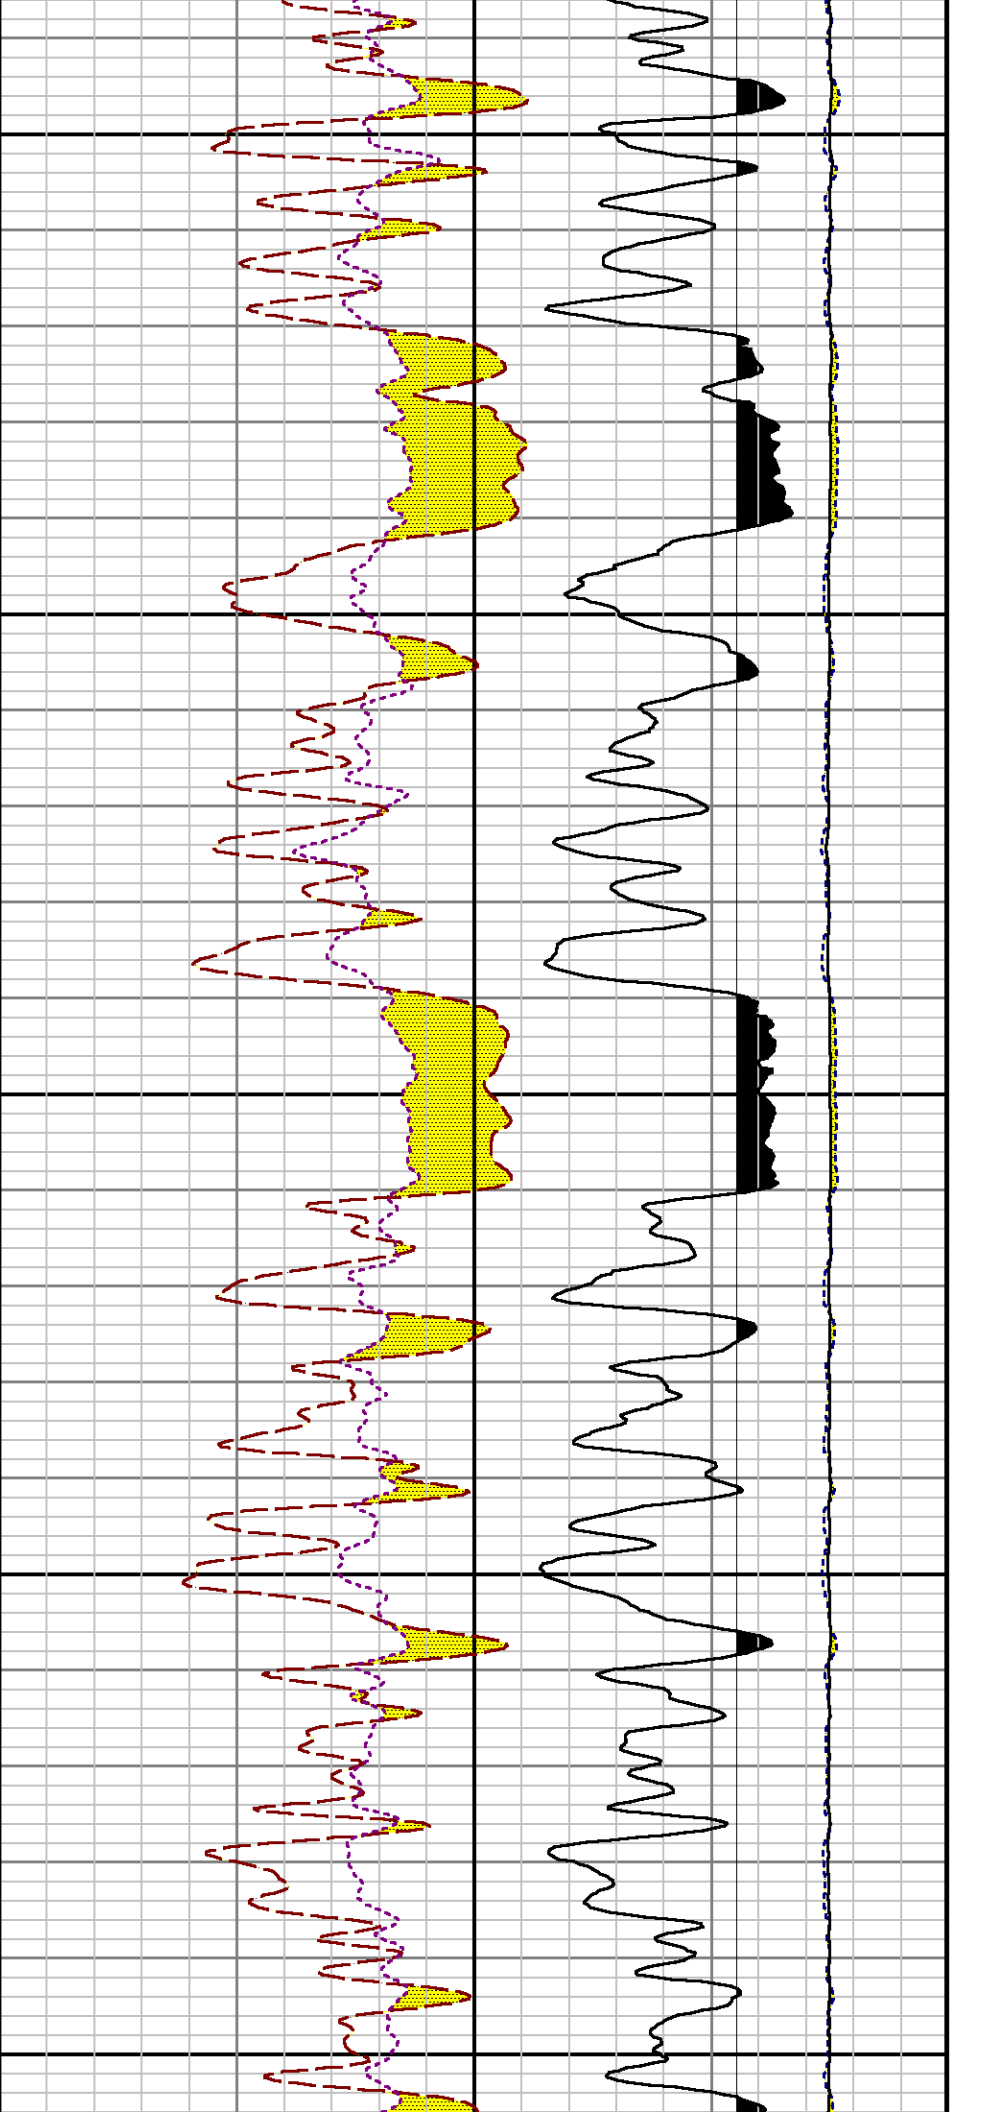


7300

7400

7500

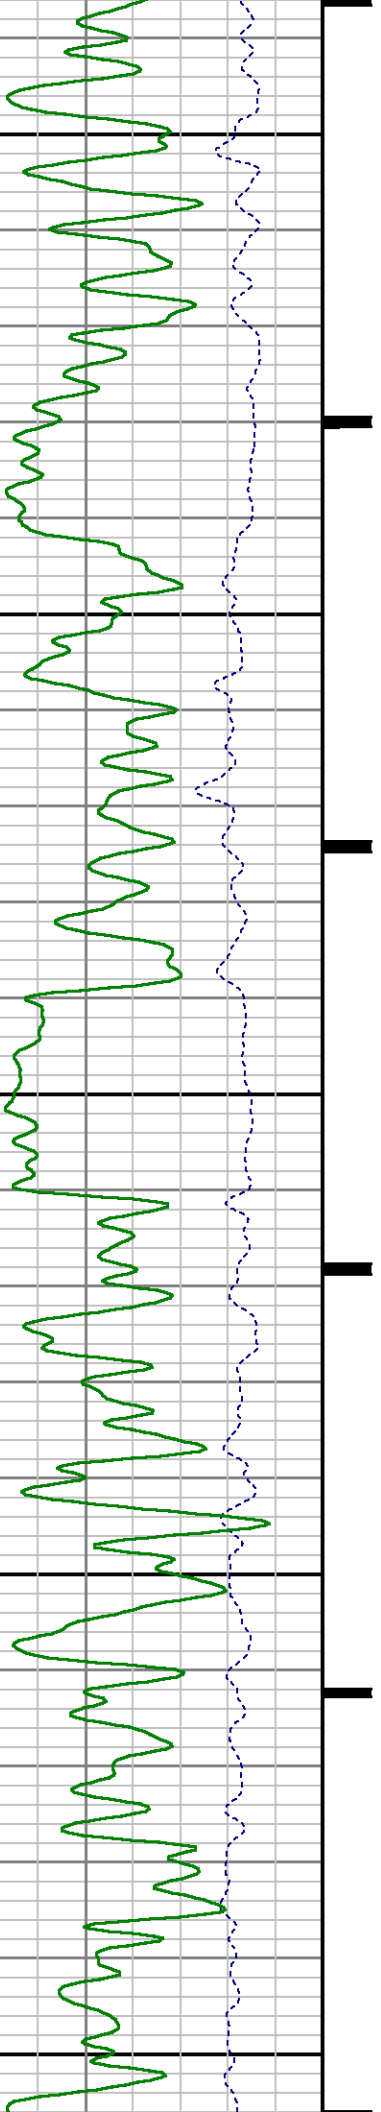







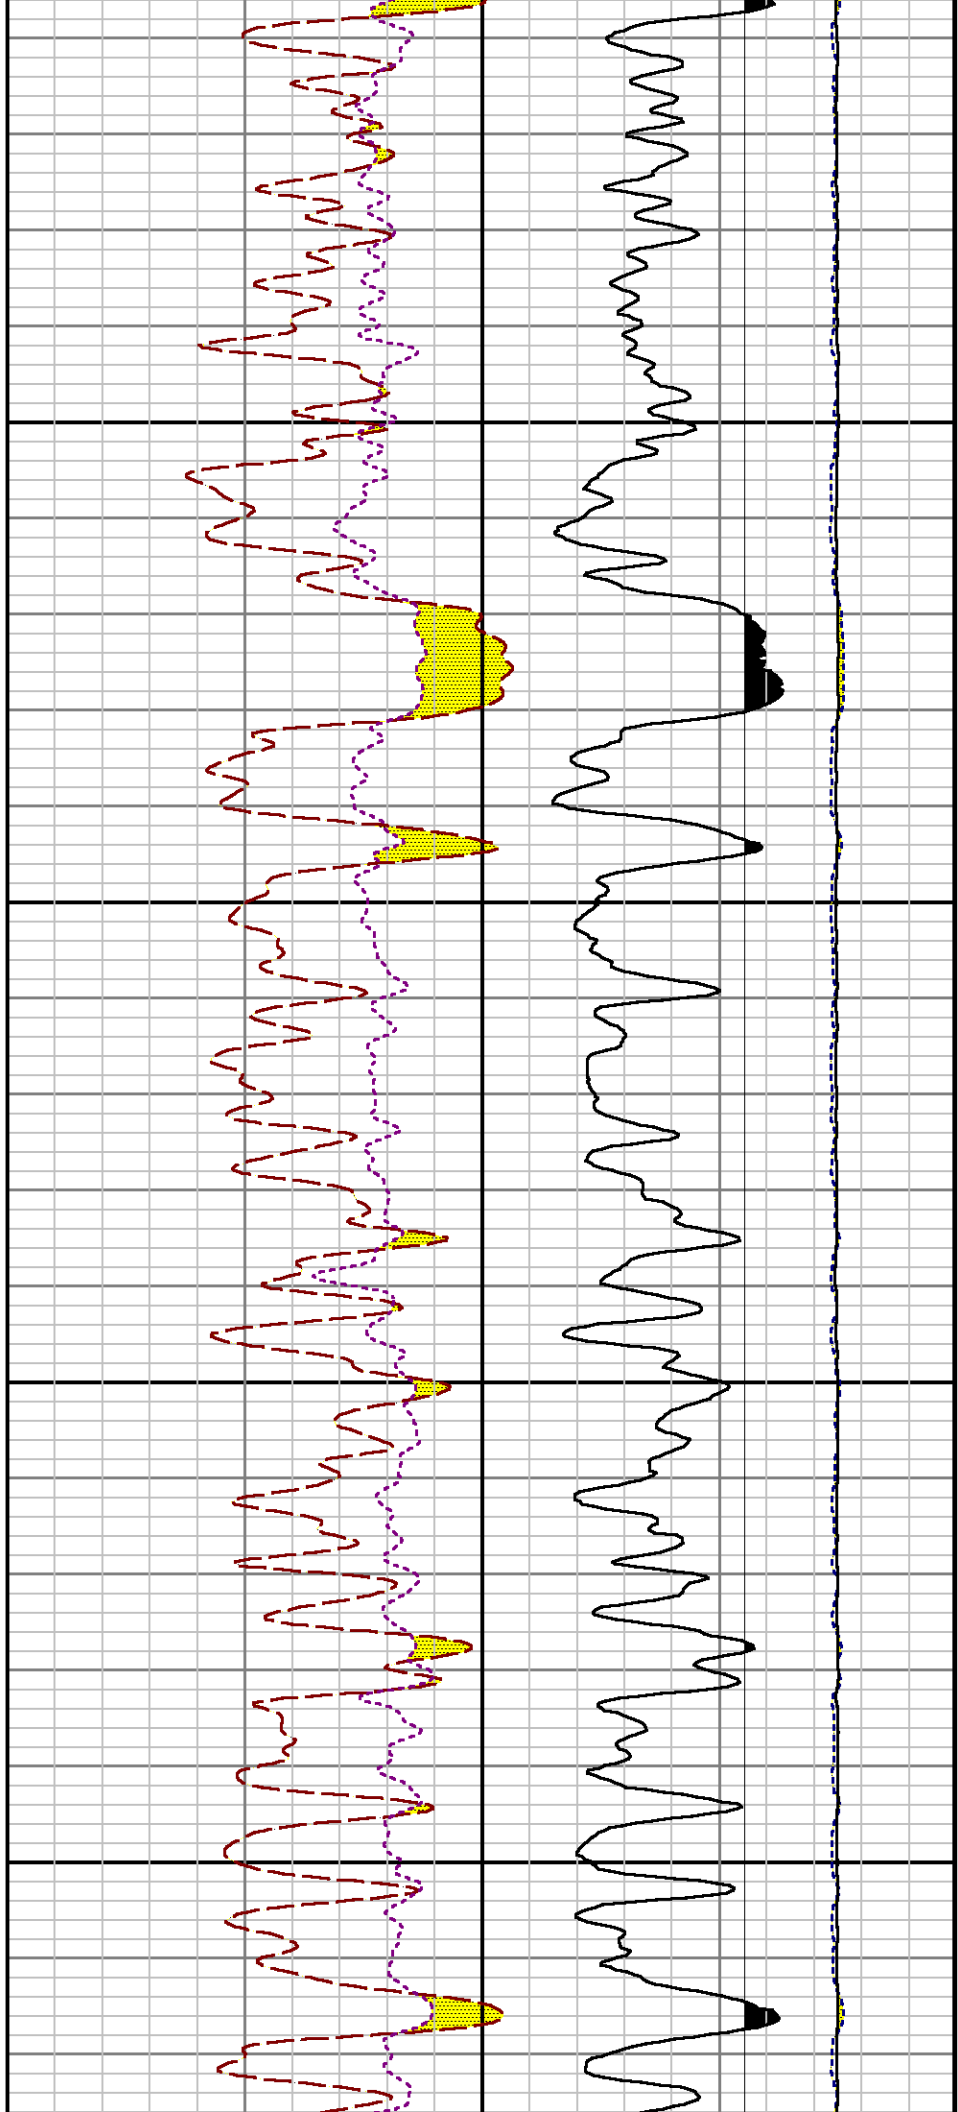




7600



7700

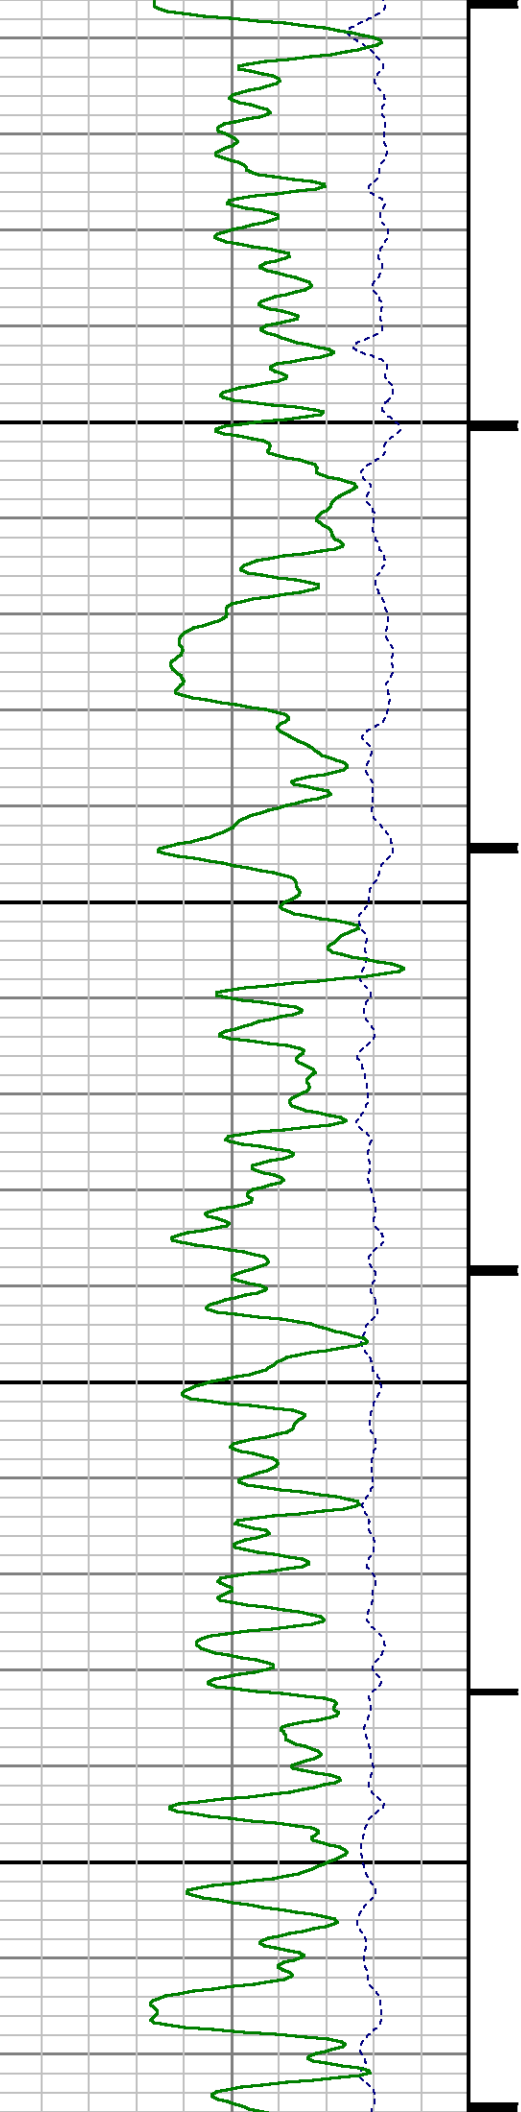


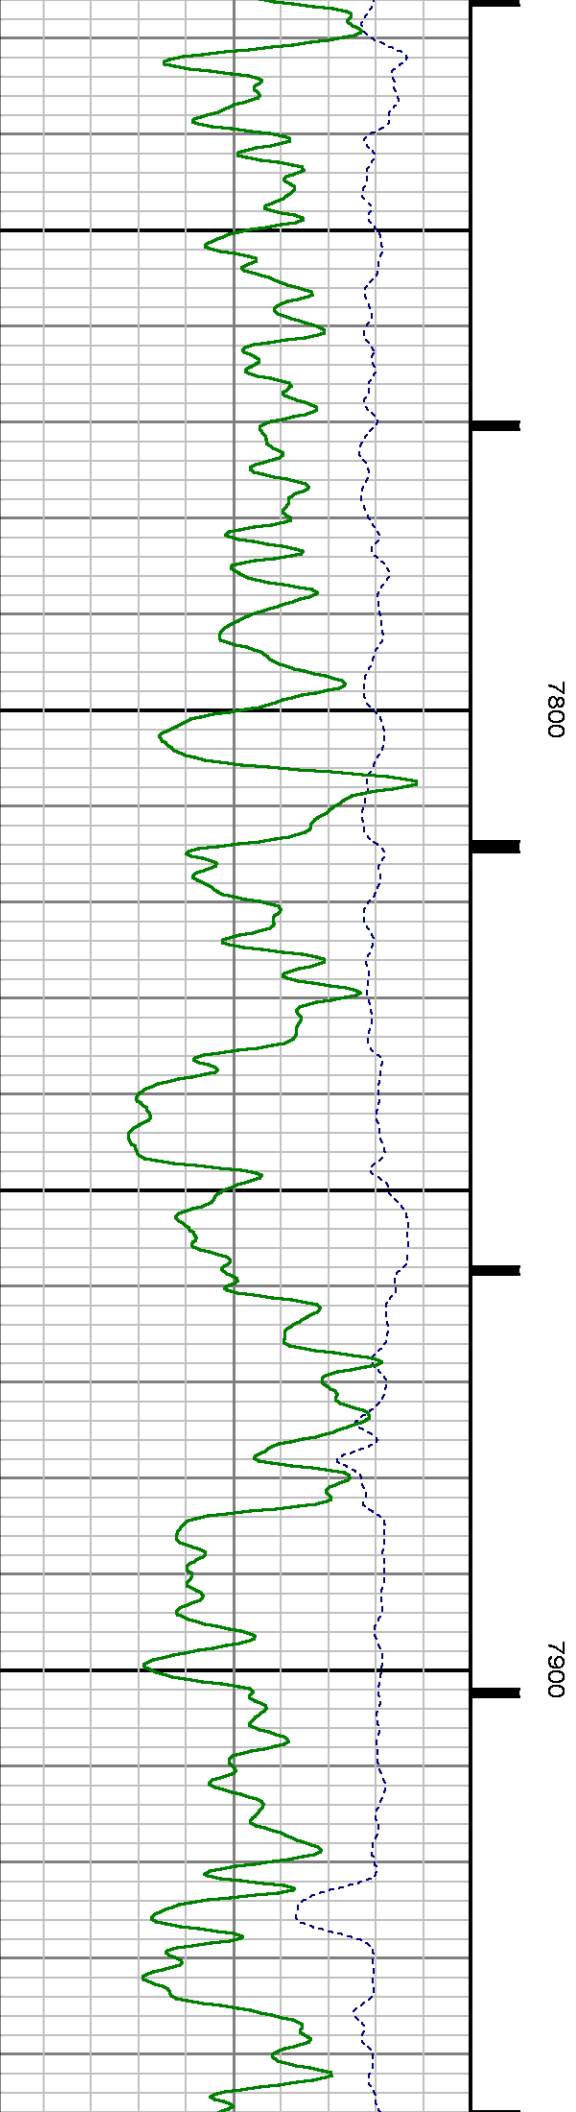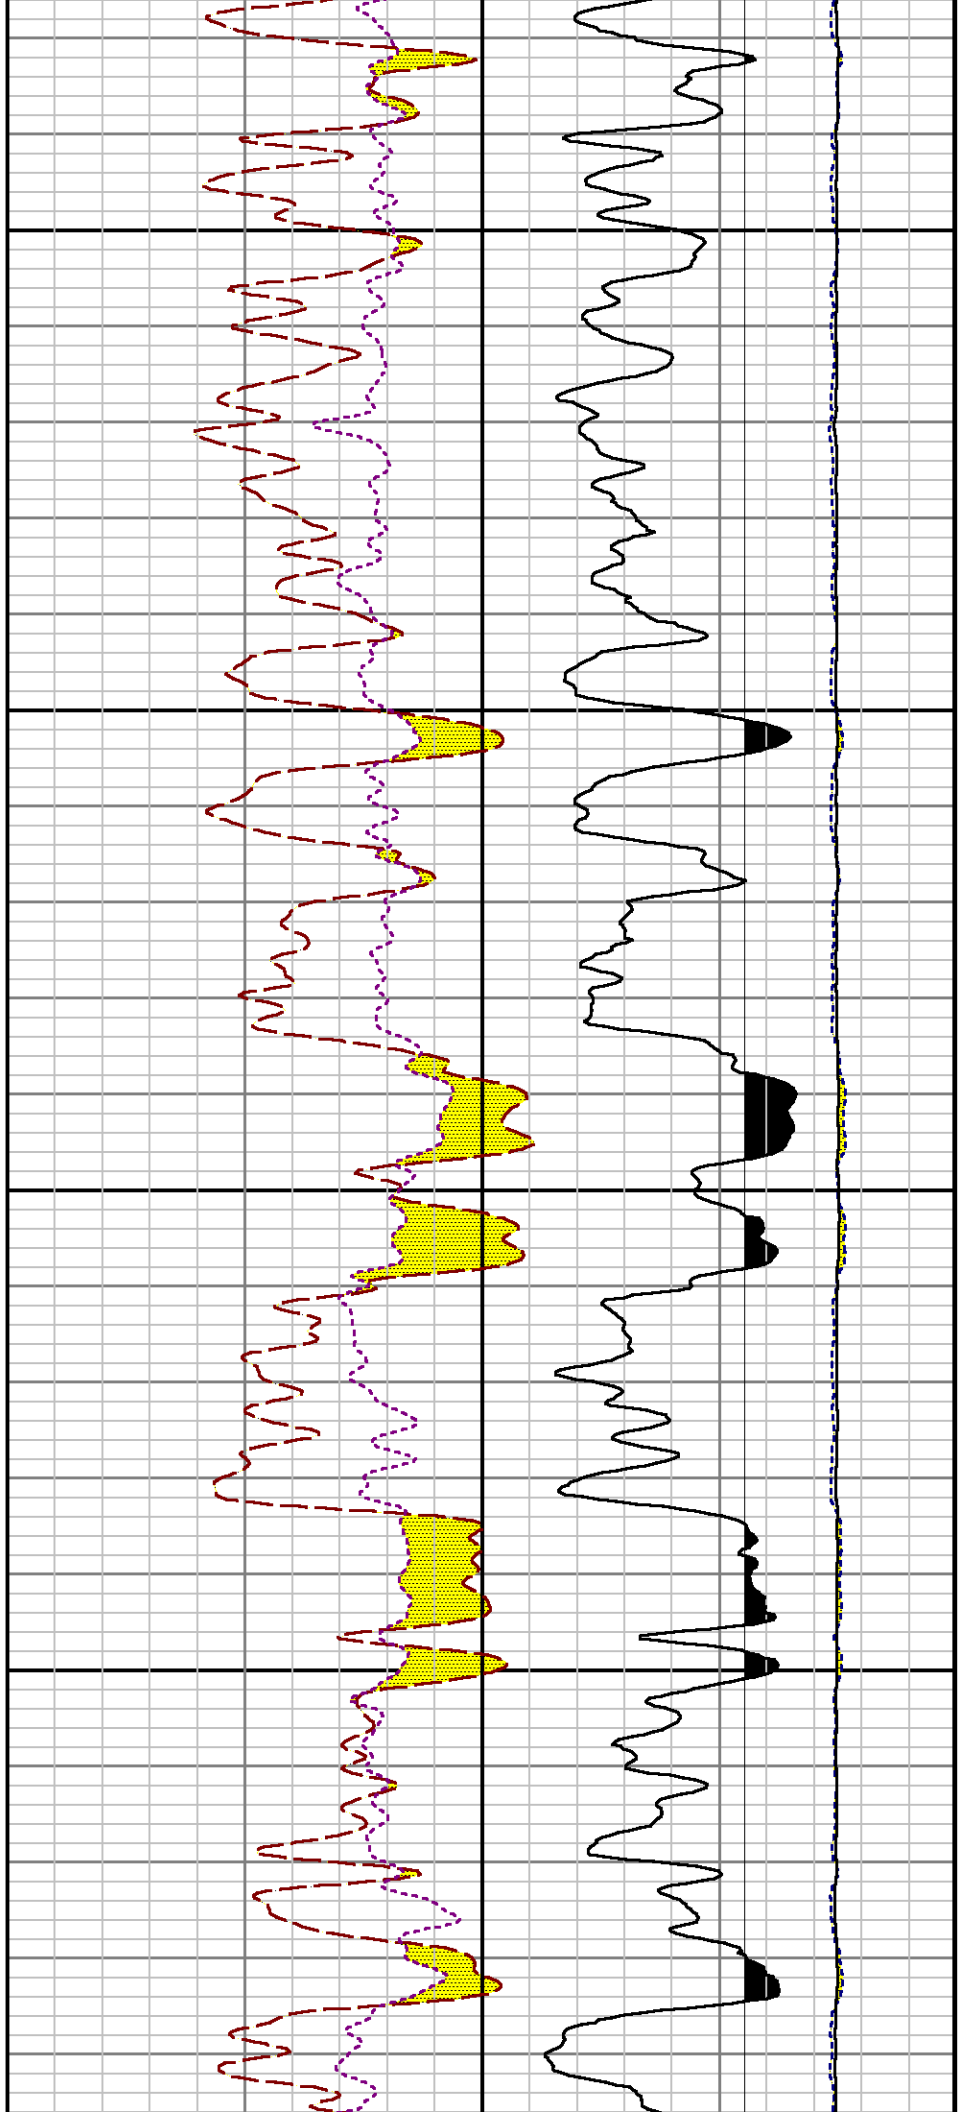


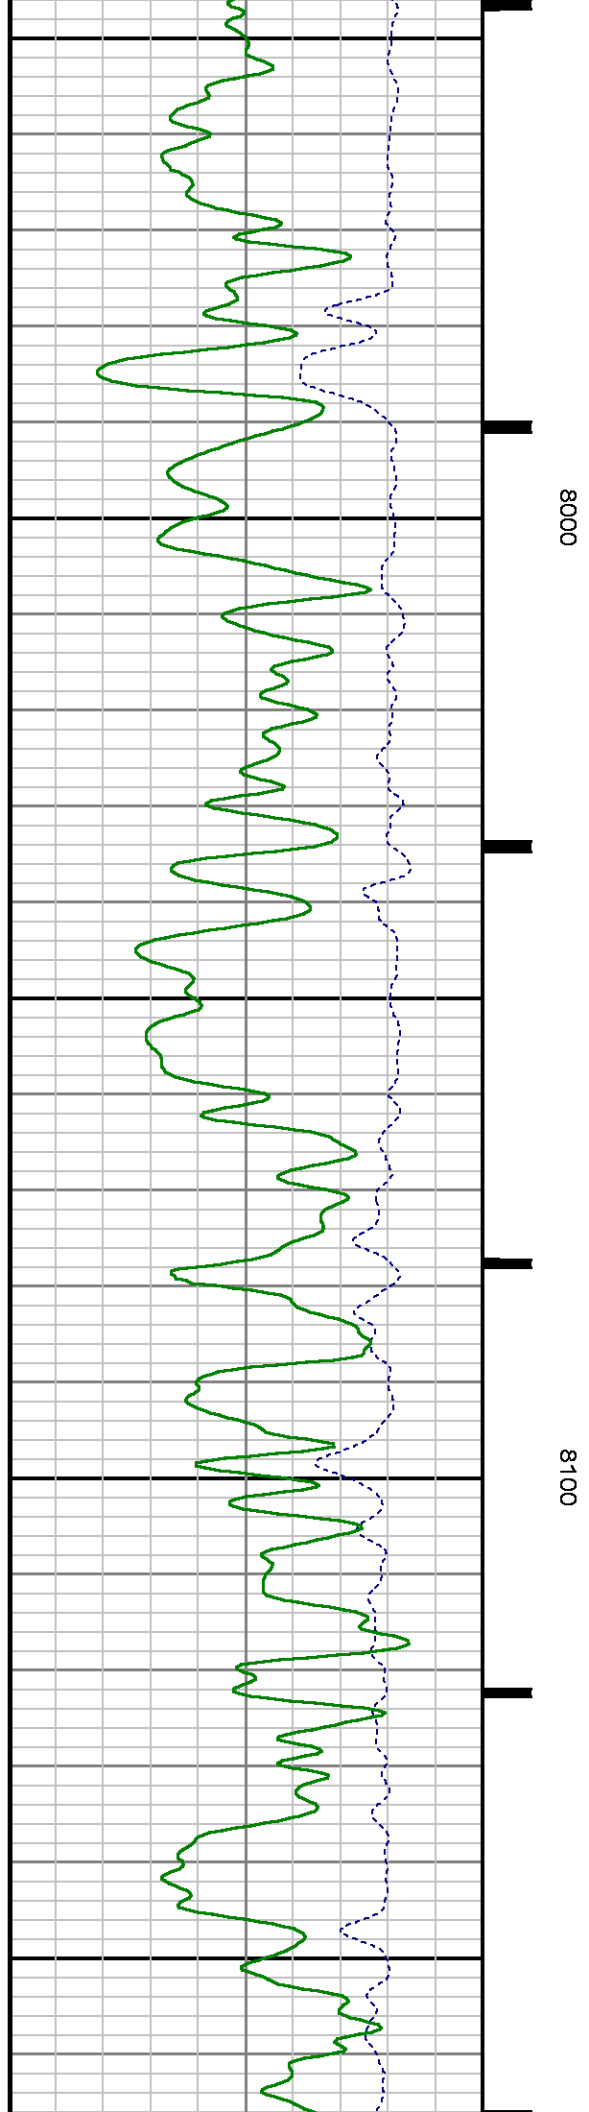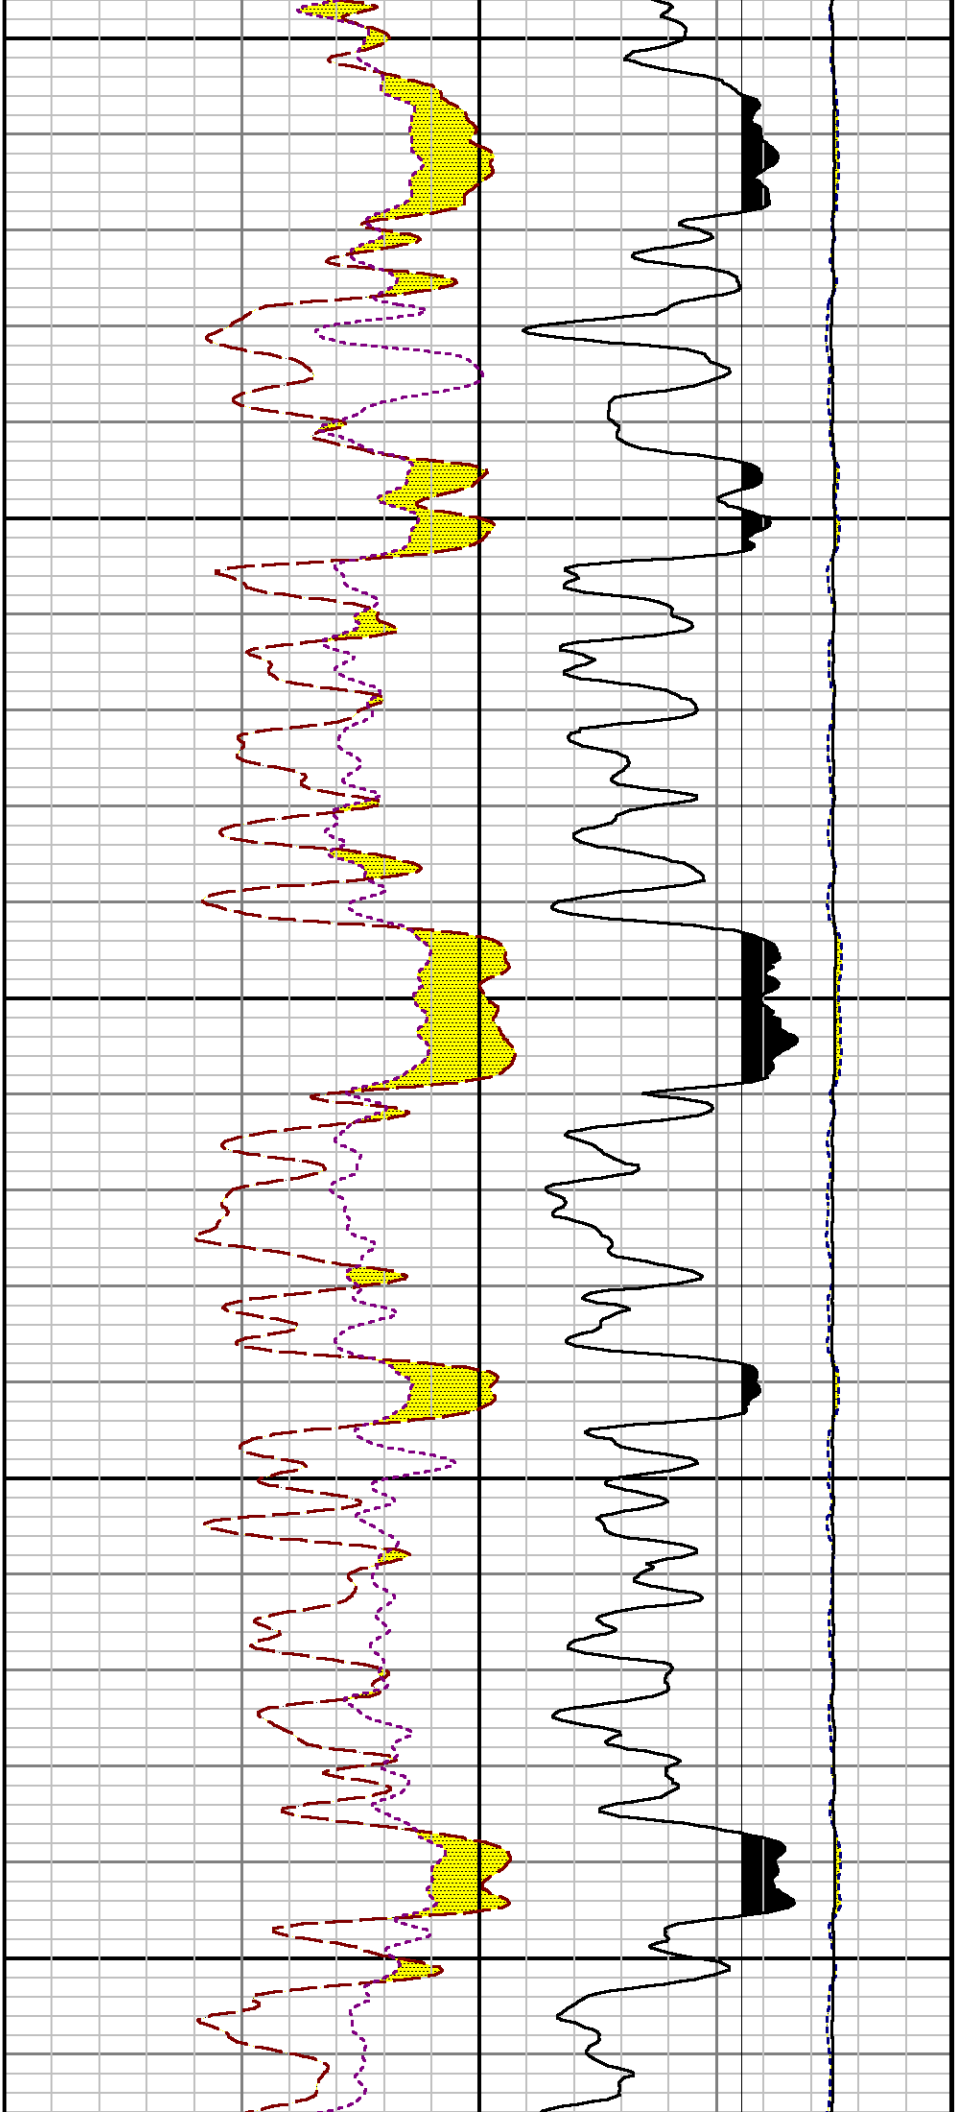

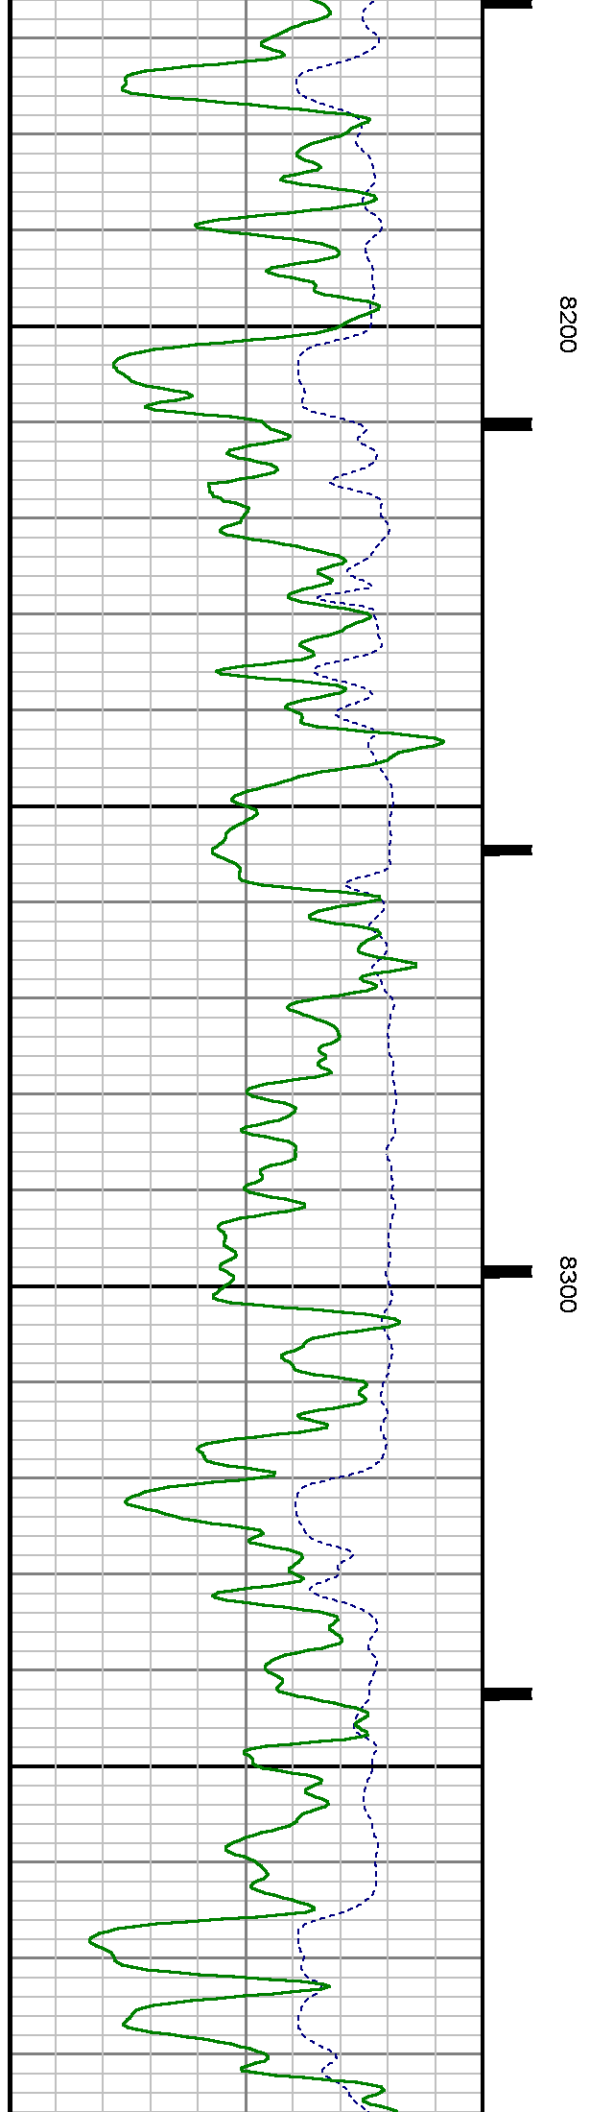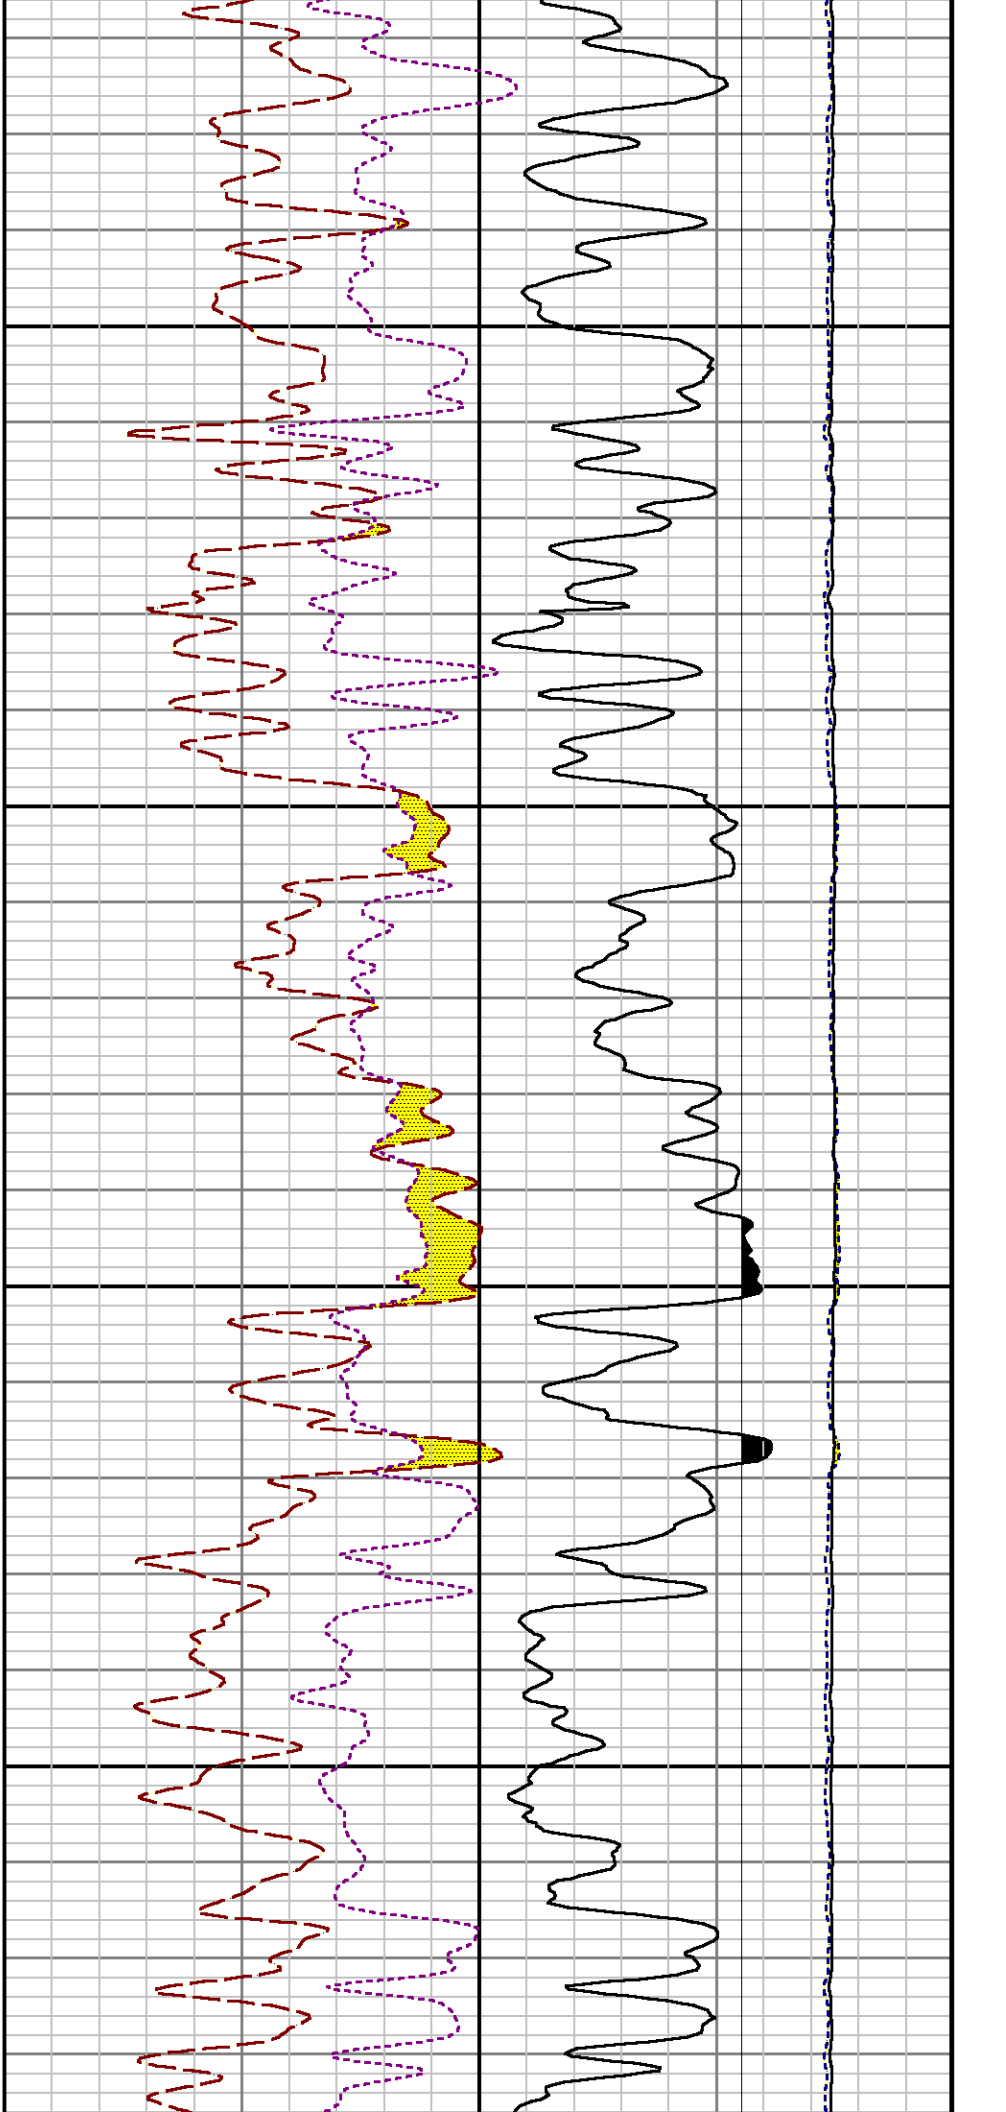

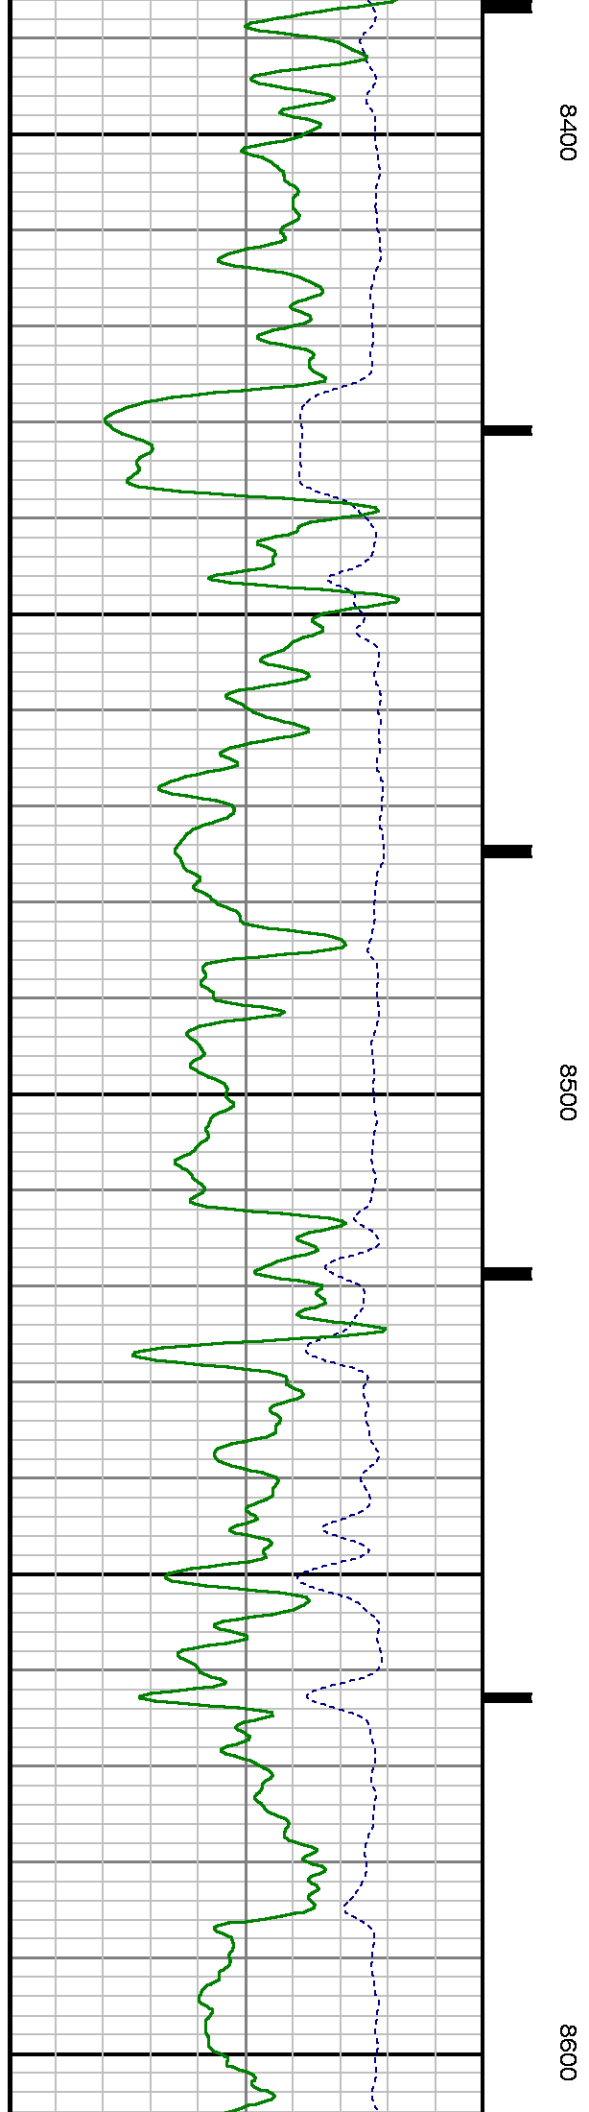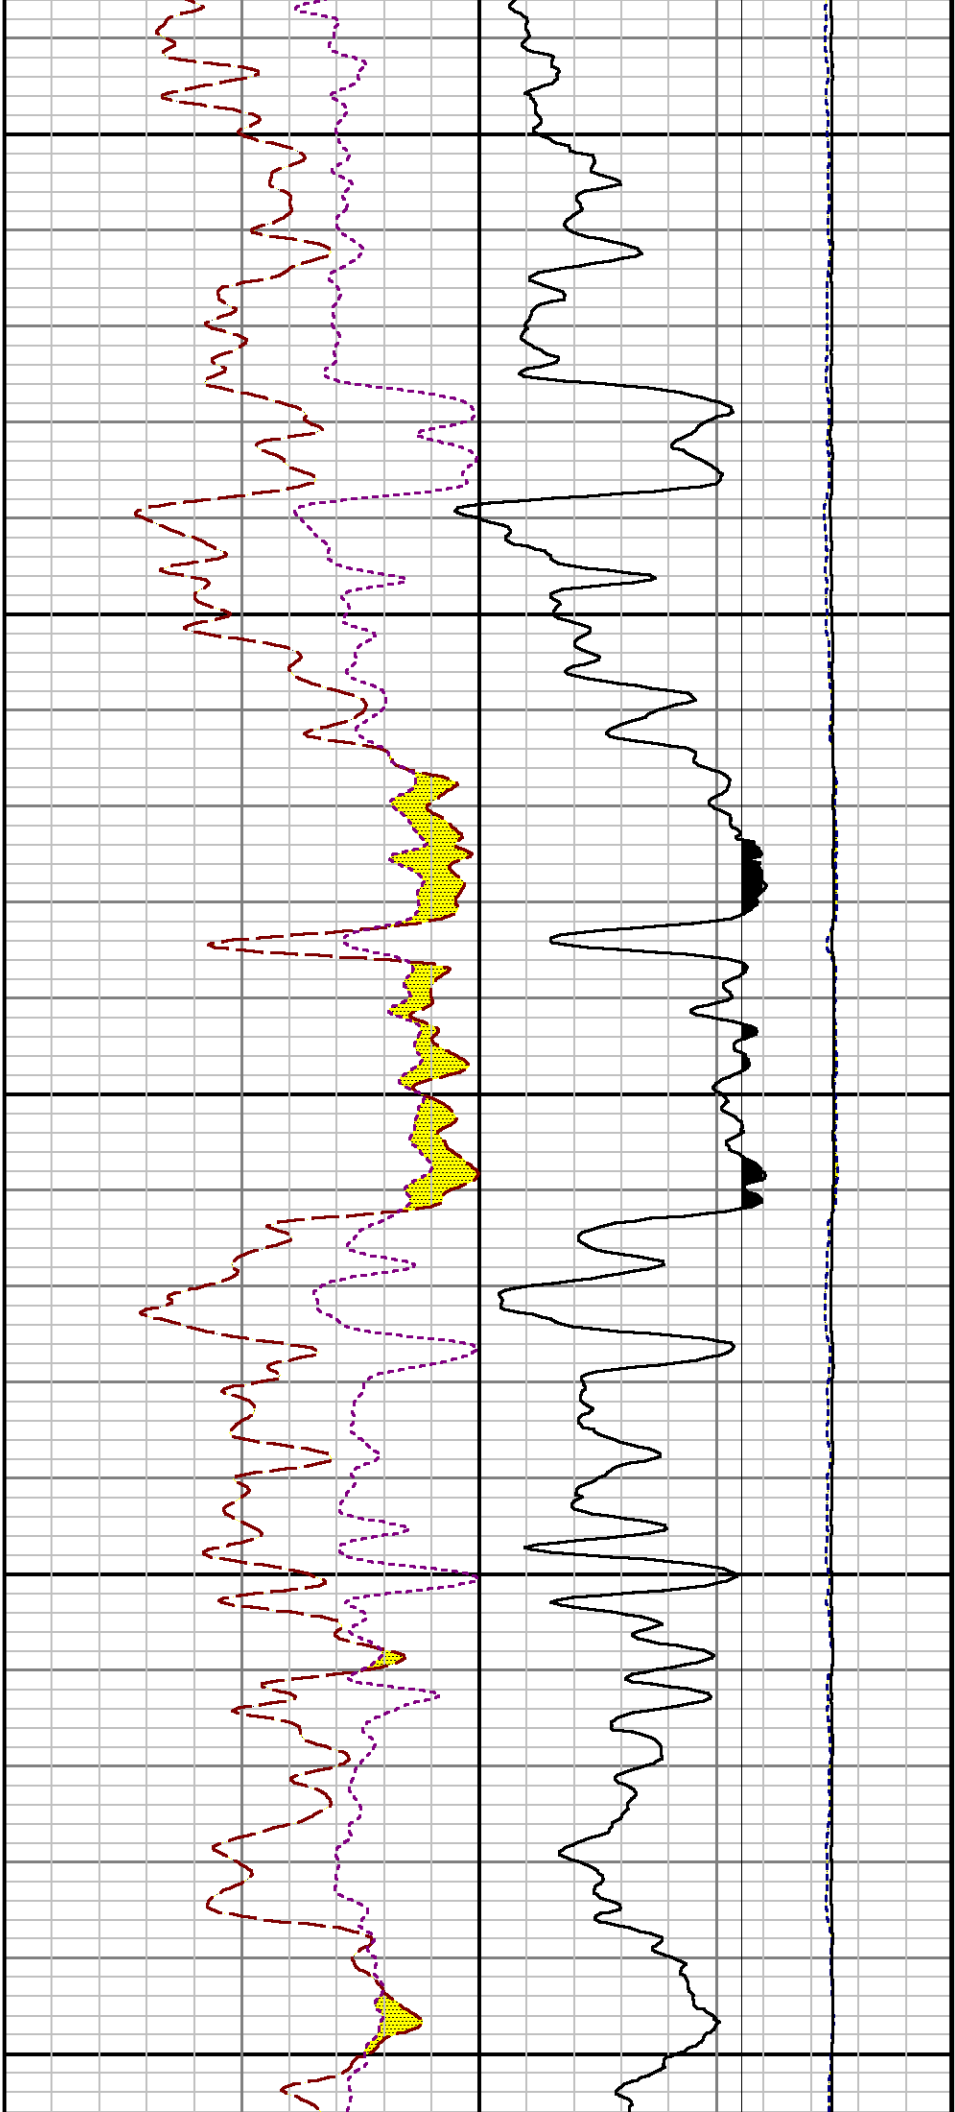

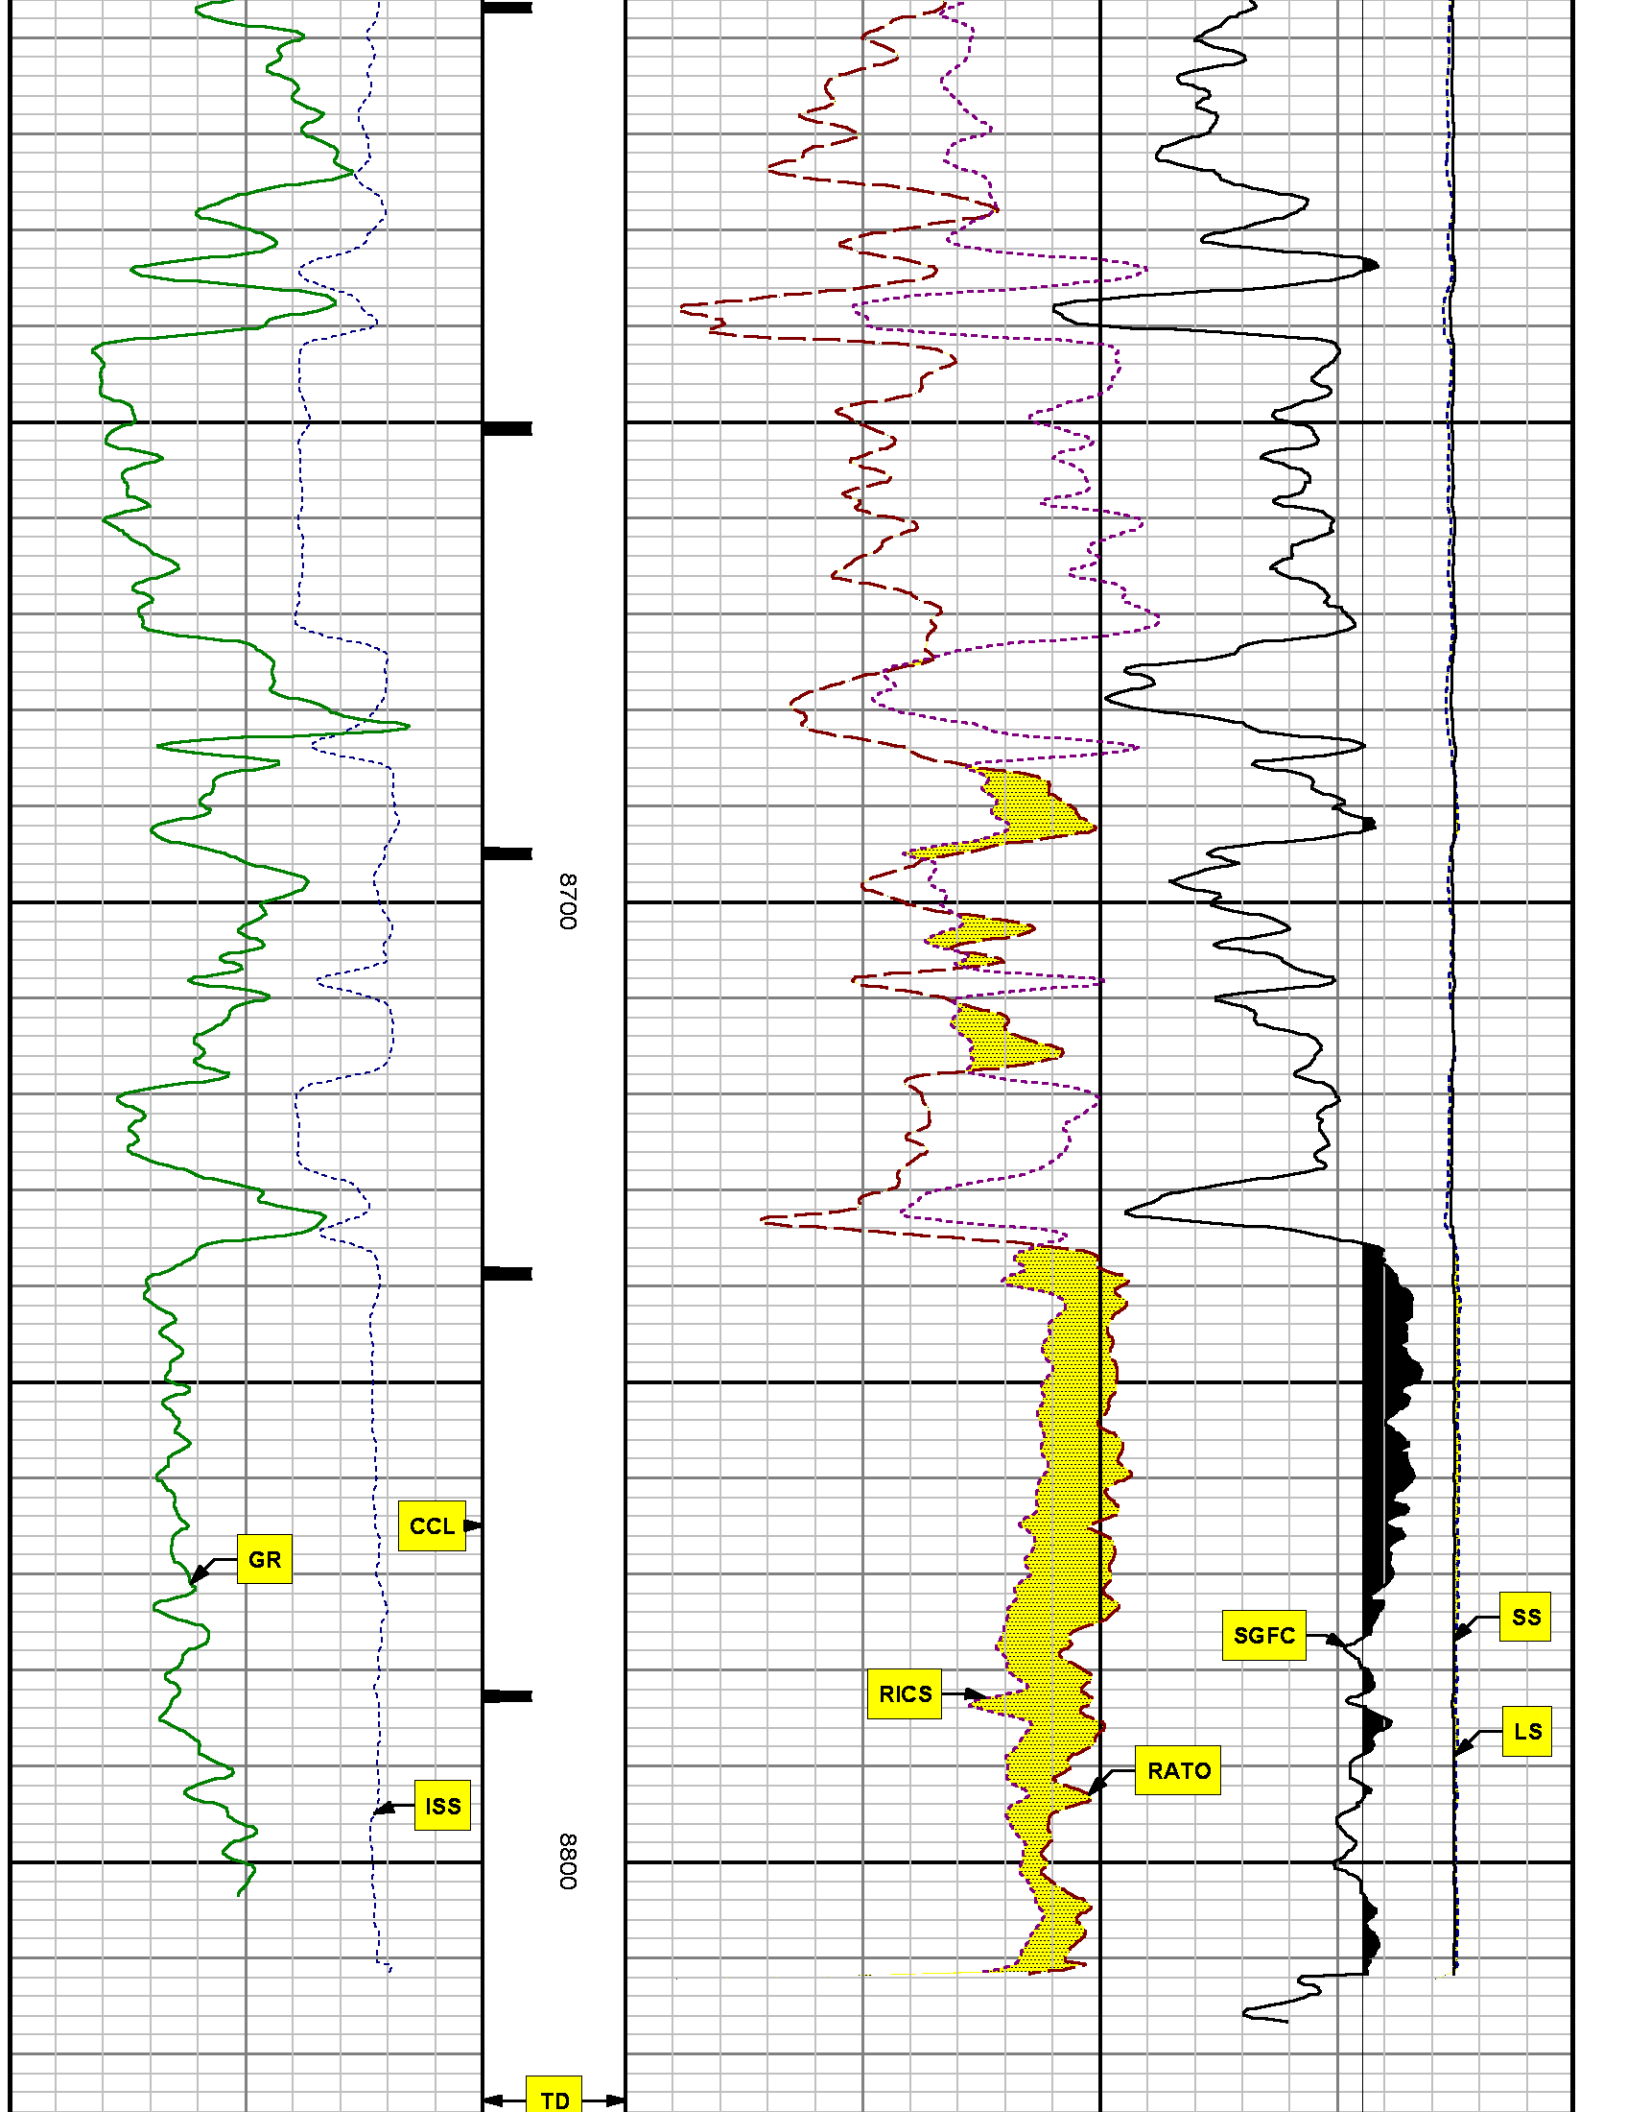

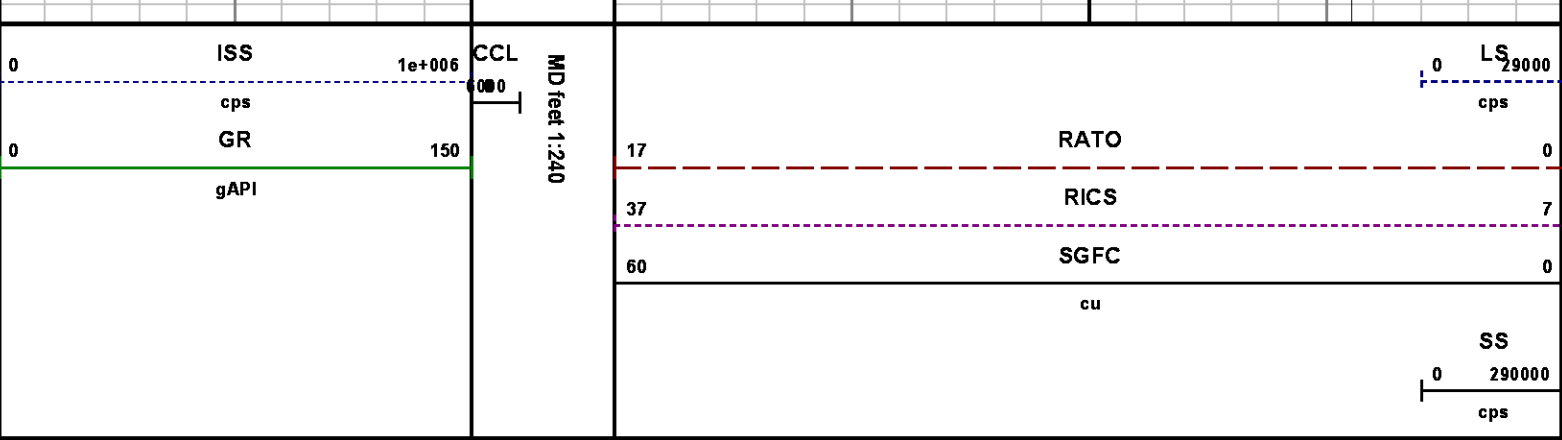

REPEAT SECTION  
PNC 3-D MODE

SPL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	TOP	BOTTOM
PNC Porosity	Borehole	Cased		7976.270	8302.521
PNC Porosity	Borehole Size	8.750	inch	7976.270	8302.521
PNC Porosity	Casing Size	4.500	inch	7976.270	8302.521
PNC Porosity	Gas Filled	Non Gas Filled		7976.270	8302.521
PNC Porosity	Matrix	Sandstone		7976.270	8302.521
TPS Pressure	Temperature Corr. Source	Fixed (72.00)	degF	7976.270	8302.521

DEPTH OFFSETS  
(for Acquired Curves)

SERIES	DEPTH OFFSET	ACQUIRED CURVES
8248ED	-26.519	FLTM
8248ED	-24.519	CCL CHV
2812LA	-21.969	GR
8281XA	-12.702	HVC3Q0 SEQ3 AMA3 AML3 BKX CXS CPT3Q0 CPT3Q2 CPT3Q3 CPT3Q4 ET3 IXS MCS3 MCS3Q0 QCAL3 RGN3 RICX SDA3 SDL3 SGA3 SGL3 STA3 XS ASPEC3 AMB3 AMF3 CHF3 IXSC IXSN RATO23

8281XA -12.291

RICXC RIN13C RIN23 RIN23C SD3D SG3D  
SGB3 SGF3 WDT3 CXSR IXSR XSR  
RICXR  
HVC2Q0 SEQ2 AMA2 AMB2 AMF2 AML2  
BKL CHF2 CLS CPT2Q0 CPT2Q2 CPT2Q3  
CPT2Q4 ET2 ILS LS MCS2 MCS2Q0  
QCAL2 RGN2 RICL RONE23 RTWO23 SDA2  
SDL2 SGA2 SGB2 SGF2 SGK2 SGL2  
STA2 ASPEC2 ILSC ILSN WDT2 RICLC  
CLSR ILSR LSR RICLR

8281XA -12.041

CPRS HVC1Q0 MV SEQ SEQ1 AMA1  
AMB1 AME1 AMF1 AML1 BKS CHF1  
CSS CORB CORF CPT1Q0 CPT1Q2 CPT1Q2A  
CPT1Q2B CPT1Q2C CPT1Q3 CPT1Q4 CPT1Q5 ET1  
G1 G2 GE1S GE2S ISS MCS1  
MCS1Q0 QA1 QCAL1 QM1 RATO RATO13  
RBOR RGN1 RICS RIN RONE RPOR  
RTWO RIN13 RONE13 RTWO13 SALB SC1  
SDA1 SDL1 SGA1 SGB1 SGBC SGE1  
SGF1 SGFC SGK1 SGL1 SS SS2  
STA1 PD1S PD2S PD3S MD1S MD2S  
MD3S DG1S DG2S DG3S PD1M PD2M  
PD3M MD1M MD2M MD3M DG1M DG2M  
DG3M MVS MA MVM FILV IAM  
TA PVM PVS IAS SSTAT QPD1  
QPD2 QPD3 QMD1 QMD2 QMD3 QDG1  
QDG2 QDG3 QMA QTA QFILV QMV  
QPV QIA DERR DCNT QPK1 QSA1  
PKS1 ASPEC1 H0C FE2XC ISSC RINC  
ISSN RDEN WDT1 RICSC CSSR G1R  
G2R ISSR SSR SS2R RATOR RATO13R  
RBORR RICSR RINR RIN13R RONE RPORR  
RTWOR

8255XA -0.792

PTFS PTMS

8255XA -0.775

SPF1 SPFQ TSCP TSDP

8255XA 0.000

DTEM TEMP TNF

SYSTEM 0.000

TEN TTEN

Created by : RPM9, v5.3.1.0

Plotted by : PlotMgr, v5.4.504

Company : WPX ENERGY


Well : SAVAGE RWF 313-25

File Name : d:\welldata\wpx\savage rwf 313-25\313rpm\repeat.xtf

Mode : PlotMgr 5.4.504

Interval : 7980.00 - 8280.00 feet UP

Created : 5/8/2014 10:44:41 PM

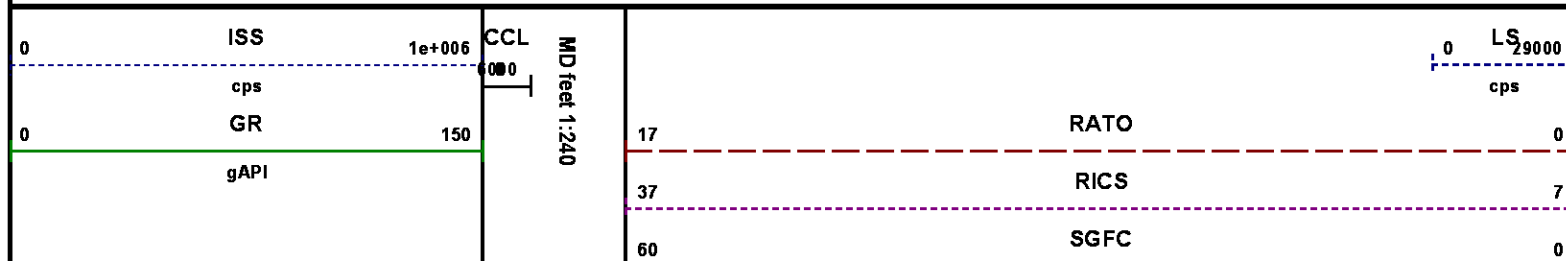



SS


0 290000


cps

cu

8000

8100

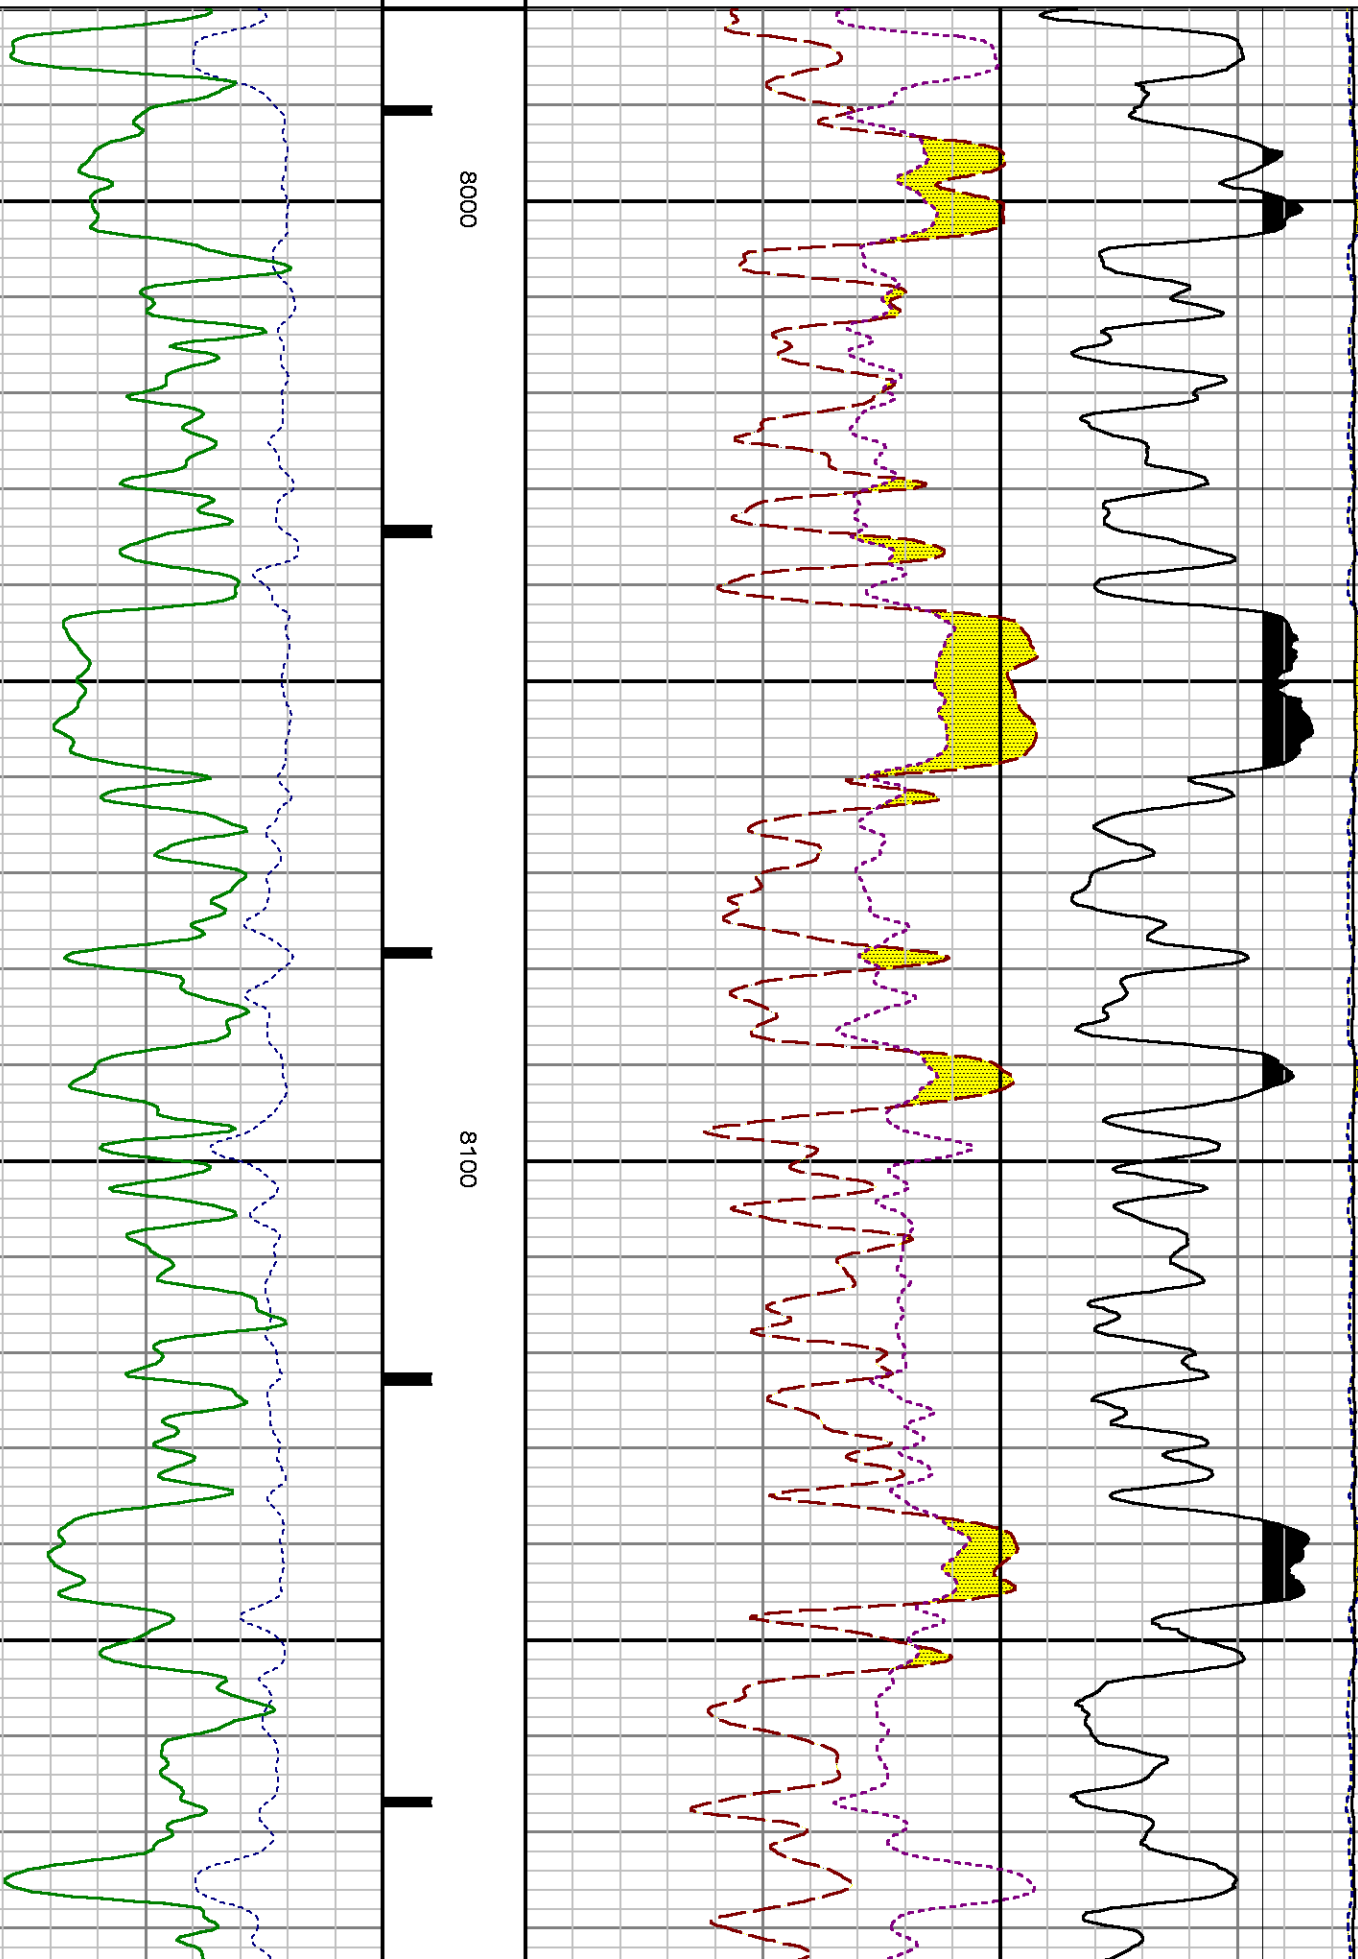

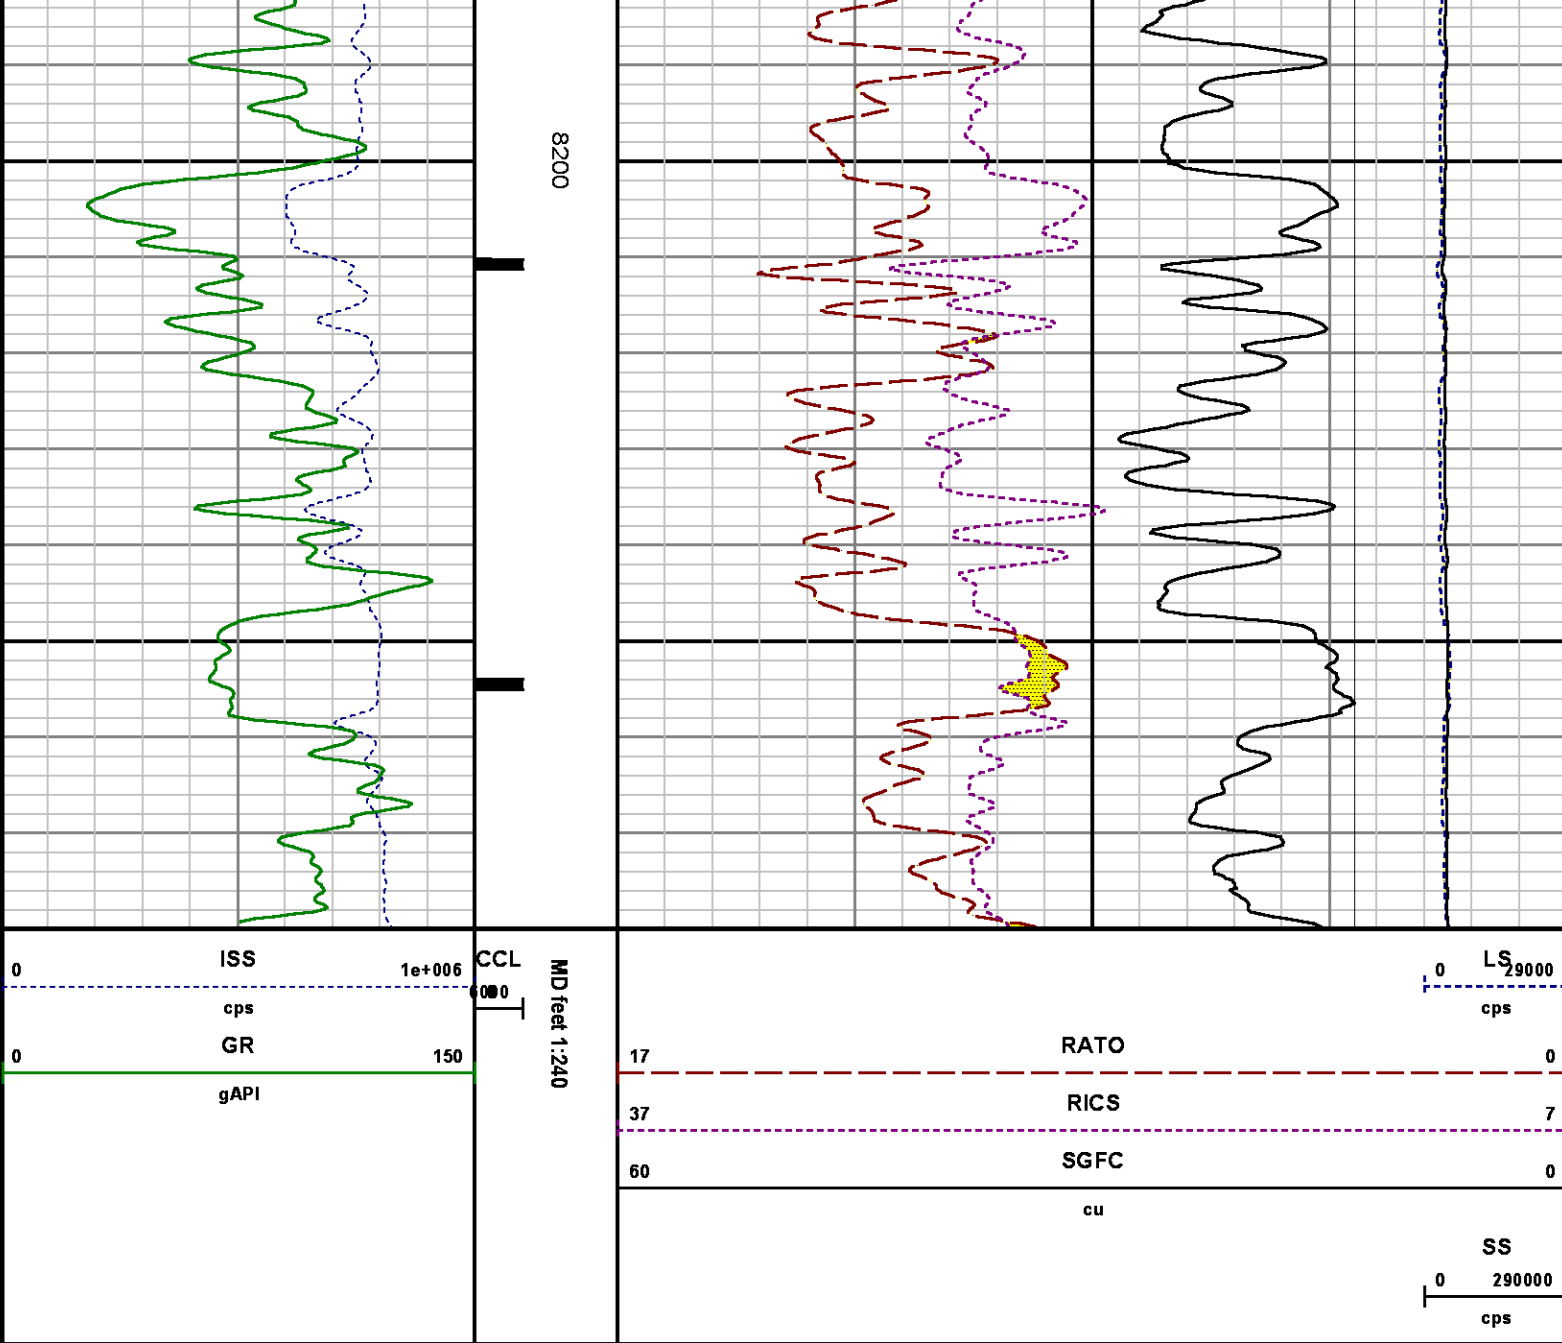

## CALIBRATION SUMMARY

PNC

Calibration File: C:\case\calver\PNC\55528.cal

PNC 3D CALIBRATION SUMMARY

DATE/TIME PERFORMED: Mon Apr 28 09:59:59 2014

TOOL SERIES: 8281XA

ASSET:

555

SEQ: 28

Calibrator #

Source #

2437XB GJSHOP

8281AA 11765054

	ISS	Mtr Vits (V)	SS Gain	LS Gain	XLS Gain	EA Temp (degF)	Sync Delay (usec)	RCAL
Raw Data	811508	121.00	2347.00	2278.00	2241.00	110.62	7.00	0.9846
Interpolated	1300000	143.31	2318.28	2276.39	2237.74			

	ISS	BKS	BKL	BKX	SGA1	SDA1	SGA2	SDA2
Raw Data	811508	6877.25	1084.60	148.19	25.74	0.14	24.34	0.28
					25.35 26.40	0.00 0.20	23.60 24.80	0.00 0.40

	ISS	ILS	IXS	SS	SS2	LS	CSS	CLS
Raw Data	811508	173131.64	27245.19	91206.62	32486.00	8514.36	55168.79	13602.94
Fit Quality %		1.06	1.20	1.11	1.05	1.06	0.97	1.04

	ISS	RBOR	RIN ISS/ILS	RIN13 ISS/IXS	RICS ISS/CSS	RATO SS/LS	RTWO SS2/LS	RONE CSS/CLS
Raw Data	811508	1.43	4.69	29.79	14.71	10.71	3.82	4.06
		1.42 1.45	3.55 5.52	22.20 32.70	10.99 16.34	10.06 11.10	3.57 3.95	3.76 4.22
Fit Quality %		0.11	0.28	0.24	0.17	0.06	0.03	0.05
Reduced	1414078	1.43	4.70	29.86	14.75	10.71	3.82	4.05
		1.42 1.45	4.33 5.52	27.60 32.70	13.70 16.34	10.06 11.10	3.57 3.95	3.76 4.22

# GAMMA RAY

Calibration File: C:\case\calver\GR\38219.cal

## CALIBRATION SUMMARY

DATE/TIME PERFORMED: Sat Apr 19 16:31:28 2014 TOOL SERIES: 2812LA ASSET: 382 SEQ: 19

Calibrator #	Background [cps]	Calibrator On [cps]	Multiplicative	Background [api]	Calibrator On [api]	Differential [api]
S2K	51.88	260.02	1.009	52.34	262.34	210.00

Verification File: C:\case\calver\GR\38219.VP

## PRIMARY VERIFICATION

DATE/TIME PERFORMED: Sat Apr 19 16:38:08 2014 TOOL SERIES: 2812LA ASSET: 382 SEQ: 19

Calibrator #	Background [cps]	Calibrator On [cps]	Multiplicative	Background [api]	Calibrator On [api]	Differential [api]
S2K WA612	51.54	263.60	1.009	52.00	265.95	213.95

# TEMPERATURE

Calibration File: C:\case\calver\TEMP\77456813.cal

## CALIBRATION SUMMARY

DATE/TIME PERFORMED: FEB 13 2014

TOOL SERIES: 8255XA ASSET: 774568 SEQ: 13

	T(0)	T(1)	T(2)	T(3)	T(4)	T(5)
Coefficients	-9.274653e+000	1.055639e-001	2.143764e-006	-2.782846e-010	0.000000e+000	0.000000e+000

# TOOL DIAGRAM

### OTA SHORT CABLE HEAD

#### PCM POWER SUPPLY

Series 8250EA  
Mnemonic PCM  
Diameter 1.70"  
Weight 18.00 lb  
Length 3.86'  
Temp Rating 350.00 °F

#### TELEMETRY / CCL


Series 8248EA  
Mnemonic PCM  
Diameter 1.70"  
Weight 20.00 lb  
Length 4.46'  
Measure Point 1.00' CCL MP  
Temp Rating 350.00 °F  
Press Rating 15000.00 PSI

#### SONDEX GAMMA RAY

Series 2812LA  
Mnemonic SNDX  
Diameter 1.69"

### RESERVOIR PERFORMANCE MONITOR

Series 8281XA  
Mnemonic RPM  
Diameter 1.70"  
Weight 75.00 lb  
Length 18.58'  
Measure Point 9.49' SS DETECTOR  
Measure Point 9.72' LS DETECTOR  
Measure Point 12.69' XLS DETECTOR  
Temp Rating 350.00 °F  
Press Rating 20000.00 PSI

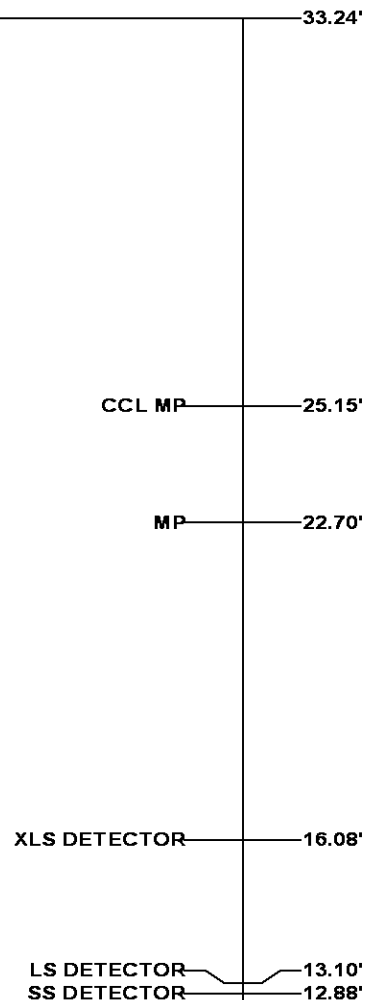

**TEMPERATURE / PRESSURE**

Series	8255XA
Mnemonic	SRPL
Diameter	1.70"
Weight	13.00 lb
Length	3.30'

PRES MP 1.61'

0.00'

**Total Length: 33.24'****Total Weight: Not Available****Max Diameter: 0' 1.70"****Baker Atlas***CASE***Company**

WPX ENERGY

**Well**

SAVAGE RWF 313-25

**Field**

RULISON

**County**

GARFIELD

**State**

CO

**Location**

SHL: 1655' FSL &amp; 2294' FWL

BHL: 2479' FSL &amp; 723' FWL

SEC 25 TWP 6S RGE 94W

**Elevations**

KB 6122 ft

DF

GL 6096 ft

**File No:**

CH085726

**API No:**

05045219870000

25 6S 94W

RWF 23-25 PAD

NABORS 577