

NOBLE ENERGY INC.

DINNER 01-02

NESE 1-4N-65W

1920' FSL & 656' FEL

Weld County, Colorado

Wattenberg

CURRENT WELLBORE SCHEMATIC

with PROPOSED P&A

6/10/2014

API: 05-123-12207
COGCC #

GL Elev: 4811'
KB Elev: 4821'

Spud Date: 12/28/1984


Surface Casing :

8 5/8" 24# @ 348'
Cement: 200 sx
TOC: Surface

TOC @ 6550'

Production Casing :

4 1/2" 11.6# @ 7183'
Cement: 180 sx
TD: 1/4/1985

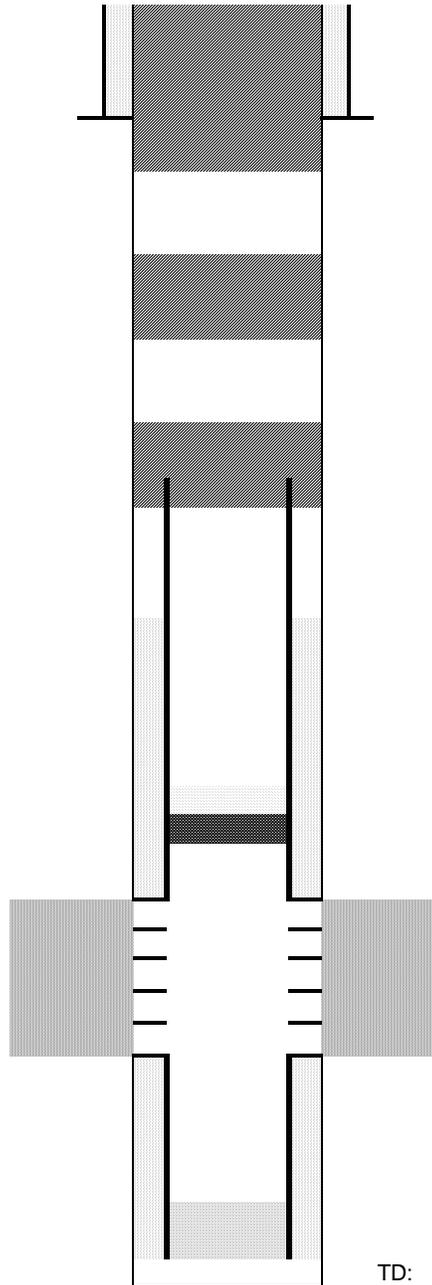

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx stub/shoe plug @ 570'
Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Pump 125 sx stub plug where csg was pulled
Cut and pull csg @ 4600'

CIBP @ 6810' w/ 2 sx cement on top

Niobrara-Codell Perforations 6860' - 7083'

TD: 7200'