

# Well:

# Northfork 43-12 Current

**SHL:** 2076 FSL & 1065 FEL Sec 12-T7N-R93W  
 Lat: 40.445739 Long: -107.392503

**Prospect:** Niobrara Sand Wash  
**Field:** Lay Creek


**County:** Moffat  
**State:** Colorado

**BHL:** Same as SHL

**API#:** 05-081-07282-0000  
**GL/KB:** 6475' KB 20')

**Spud Date:** 4/13/2006  
**1st Prod Date:**

Hole Size TVD

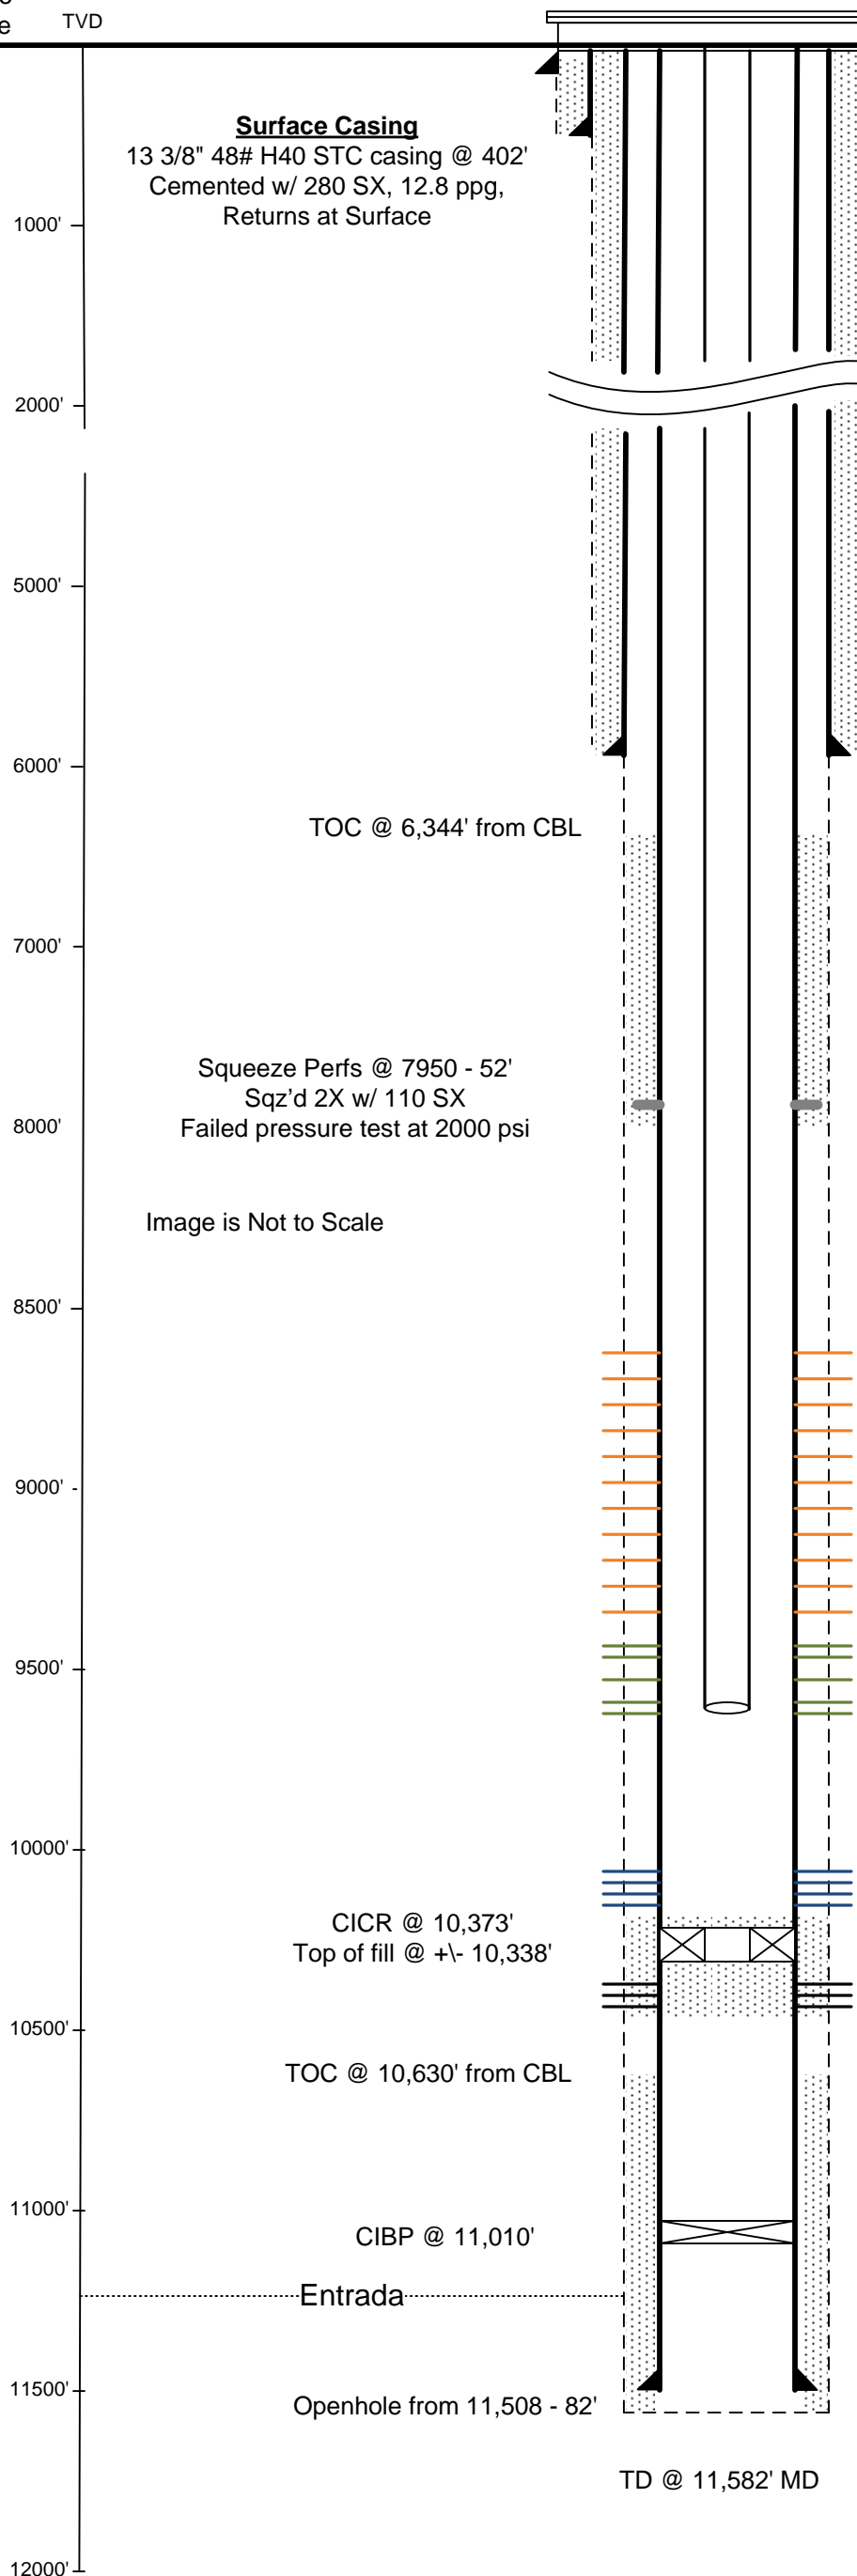

**Intermediate Casing**  
 9 5/8" 40 - 43# N80 casing @ 5955'  
 Cemented w/ 770 SX, 11.0 ppg Lead  
 190 SX, Class G 50/50 Poz, 14.5 ppg Tail  
 Returns at Surface

**Production Tubing 9-10-08**  
 - 293 jts 2 7/8" tubing  
 - 2 7/8" PSN  
 - 1 jt of 2 7/8" tubing  
 - 2 7/8" NC  
 - EOT @ 9603'

Zone	Perforated Interval			Stimulation				
	Depth ft.	SPF	Phasing	Rate BPM	Acid gal	Fluid bbl	100 Mesh lbs.	30/50 lbs.
Nio - Buck Creek & Toe Creek Benches	8637 - 38	1	0	30	1,974	2,727	0	167,076
	8685 - 86	2	180					
	8734 - 35	2	180					
	9036 - 37	2	180					
	9060 - 61	1	0					
	9164 - 65	2	180					
	9239 - 40	2	180					
	9257 - 58	2	180					
	9270 - 71	1	0					
	9300 - 01	2	180					
Nio - Wolf Mtn Bench	9334 - 35	1	0	25	7,140	2,258	5,875	73,124
	9435 - 36	3	120					
	9472 - 73	3	120					
	9542 - 43	3	120					
	9585 - 86	3	120					
Nio - North Fork Bench	9600 - 01	3	120	31	4,500	1,616	0	74,313
	10040 - 41	3	120					
	10090 - 91	3	120					
	10140 - 41	3	120					
Carlile	10163 - 64	3	120	26	13,500	1,797	4,500	57,807
	10410 - 11	3	120					
	10420 - 21	3	120					
	10430 - 31	3	120					

**Production Casing**  
 7" 26# P110 & N80 LTC casing @ 11,508'  
 Cemented w/ 470 SX, 50/50 Poz, 14.3 ppg Lead  
 70 SX, 50/50Poz, 14.3 ppg Tail