

**NOBLE ENERGY INC.**  
 HSR-SCHREIBER 1-30  
 NENE 30-4N-65W  
 745' FNL & 565' FEL  
 Weld County, Colorado  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 8/27/2014

API: 05-123-15483  
 COGCC #

GL Elev: 4807'  
 KB Elev: 4817'


Spud Date: 12/26/1991

**Surface Casing :**  
 8 5/8" 24# @ 435'  
 Cement: 300 sx  
 TOC: Surface

Production Casing Cement from 3999' - 4950'

TOC @ 6370'

**Production Casing :**  
 4 1/2" 11.6# @ 7389'  
 Cement: 386 sx  
 TD: 12/31/1991

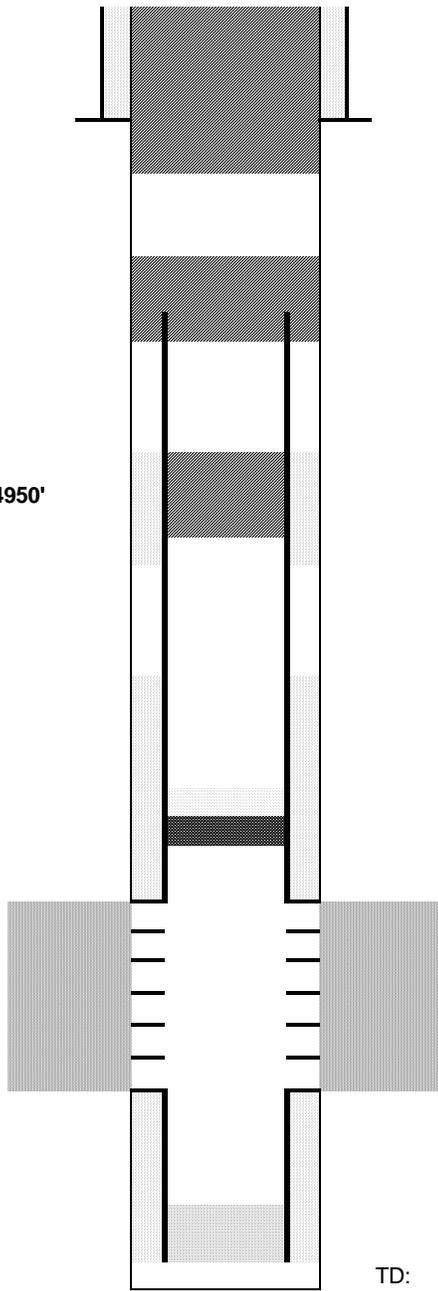

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 540'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

60 sx Balance Plug @ 4800'

CIBP @ 6945' w/ 2 sx cement on top

Niobrara Perforations 6995' - 7130'

Codell Perforations 7240' - 7256'

TD: 7386'