

**NOBLE ENERGY INC.**  
**DOMENICO MC33-16X**  
**SESE 33-1N-69W**  
**574 FSL & 559 FEL**  
**BOULDER COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**10/14/2014**

API: 05-013-06466  
 COGCC #

GL Elev: 5358'  
 KB Elev: 5368'


Spud Date: 6/20/1994

**Surface Casing :**  
 8 5/8" 24# @ 923'  
 Cement: 370  
 TOC: Surface

TOC @ 7478'

Nio Top: 7846

**Production Casing :**  
 3 1/2" 7.7# @ 8395'  
 Cement: 210  
 TD: 6/30/1994

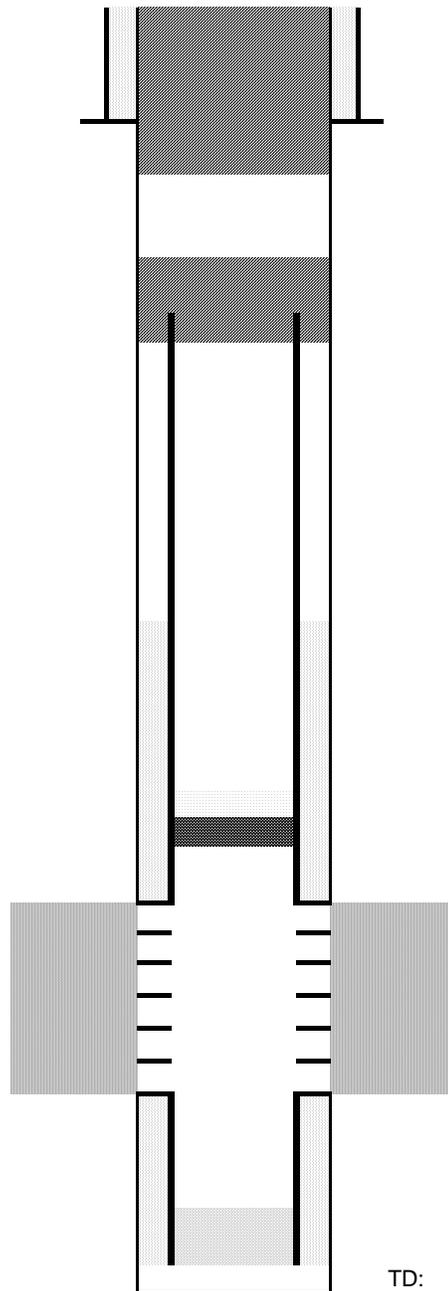

Cut surface casing off 6'-8' below surface.

Pump approx 385 sx shoe plug @ 973'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 7802' w/ 2 sx cement on top

Niobrara Perforations 7852' - 8020'

Codell Perforations 8259' - 8269'

TD: 8440'