

NOBLE ENERGY INC.
 SCHMIDT 24-26
 SENE 26-4N-66W
 2177 FNL & 636 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 11/4/2014

API: 05-123-24847
 COGCC #

GL Elev: 4767'
 KB Elev: 4779'


Spud Date: 1/22/2008

Surface Casing :
 8 5/8" 24# @ 592'
 Cement: 310
 TOC: Surface

TOC @ 3470'

Nio Top: 7060'

Production Casing :
 4 1/2" 11.6# @ 7463'
 Cement: 510
 TD: 1/27/2008

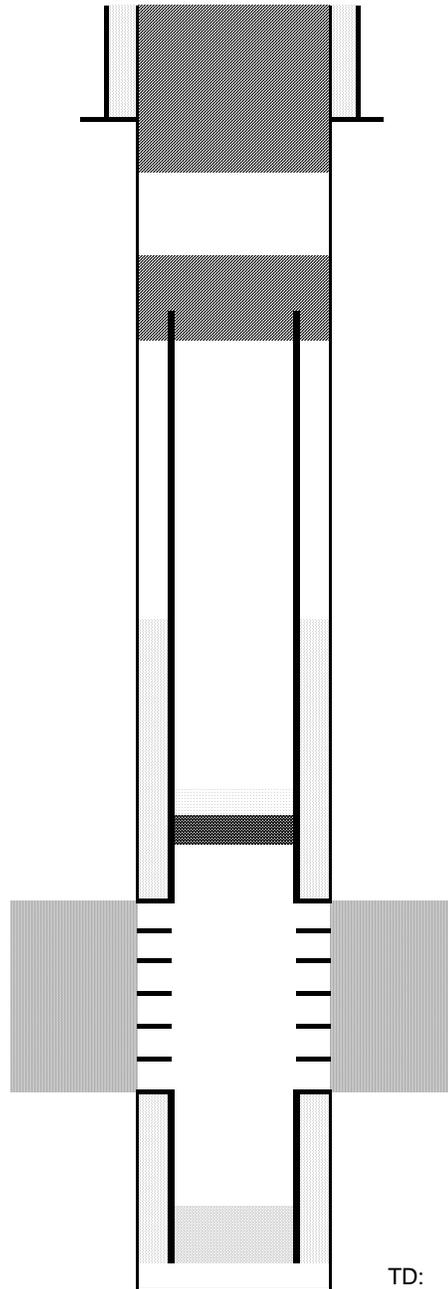

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 642'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 7040' w/ 2 sx cement on top

Niobrara Perforations 7090' - 7183'

Codell Perforations 7312' - 7327'

TD: 7475'