



Project: Weld County, CO (NAD 83)  
 Site: Sec. 23-T2N-R67W  
 Well: Small Eyed 35C-35HZ  
 Wellbore: Plan C  
 Design: Actual Surveys

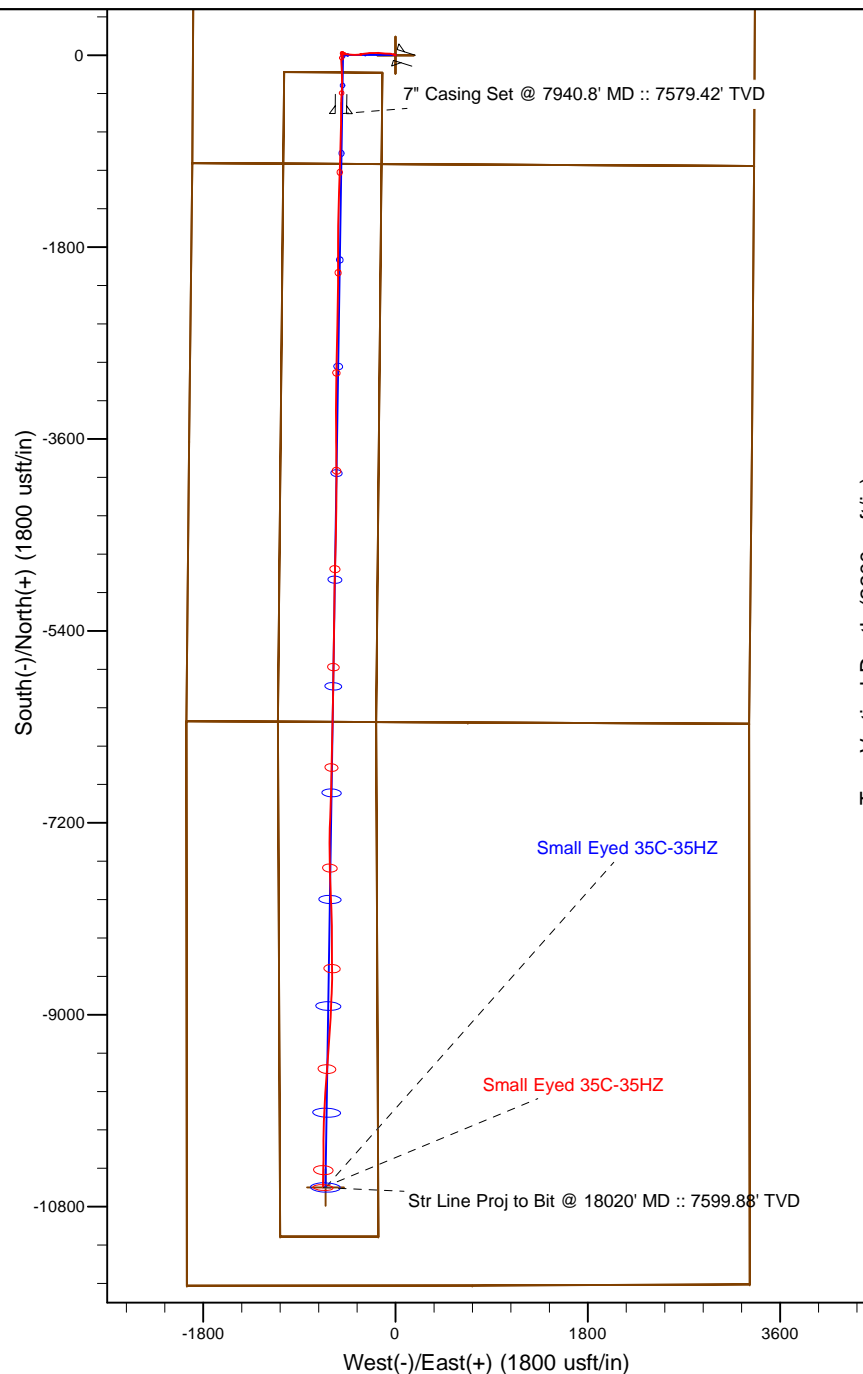

LEGEND

Small Eyed 35C-35HZ, Plan C, Rev C0 V0

Actual Surveys

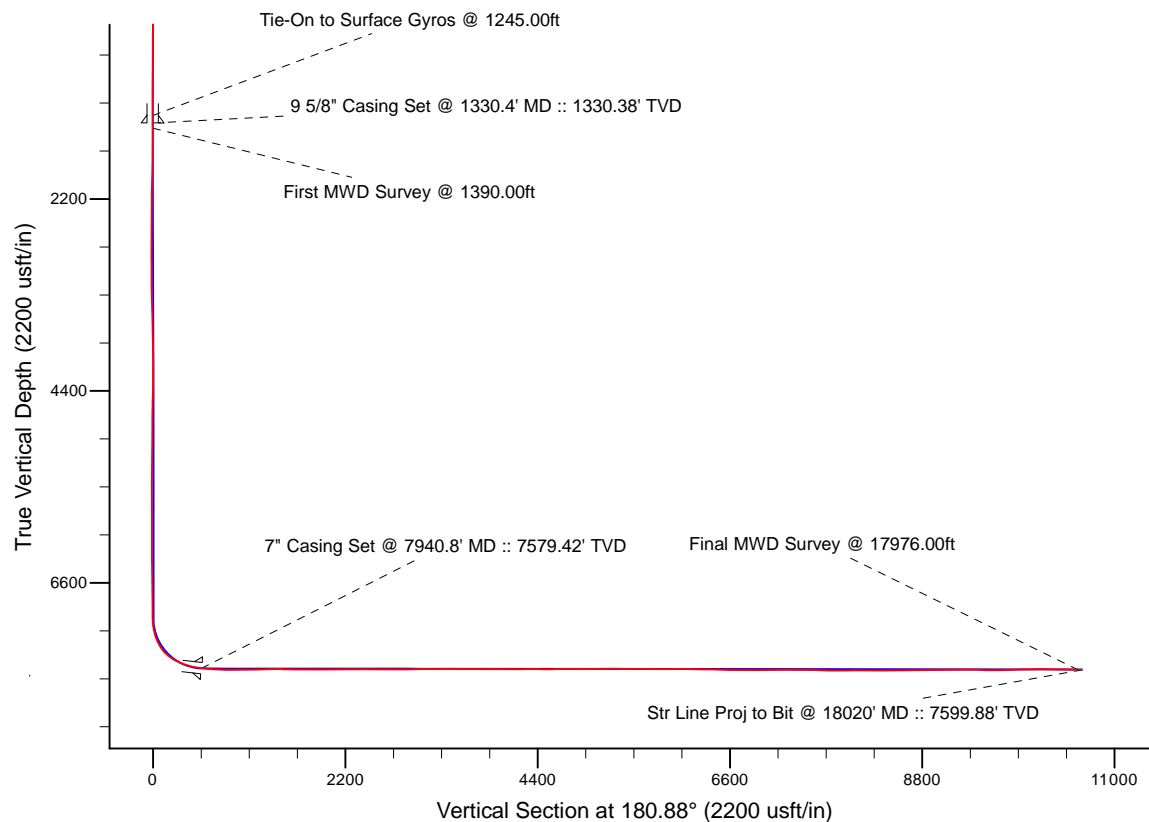

7" Casing: ~469.99' FSL, ~1388.70' FWL  
 Lat/Long: 40.117682 N, -104.862516 E  
 State Planes - CO Northern: 1,286,356.52' N, 3,178,283.69' E  
 Location: Sec. 23-T2N-R67W

BHL: ~919.32' FSL, ~1273.11' FWL  
 Lat/Long: 40.090032 N, -104.863113 E  
 State Planes - CO Northern: 1,276,283.18' N, 3,178,189.06' E  
 Location: Sec. 35-T2N-R67W

WELL DETAILS: Small Eyed 35C-35HZ	
Ground Level:	4963.00
RKB = 25' @ 4988.00usft (H&P 308)	
Design: Actual Surveys (Small Eyed 35C-35HZ/Plan C)	
Created By: Clint Eshelman	Date: 9/29/2014
Reviewed: _____	Date: _____

# Anadarko Petroleum Corp.

Weld County, CO (NAD 83)

Sec. 23-T2N-R67W

Small Eyed 35C-35HZ

Plan C

Design: Actual Surveys

## Sperry Drilling Services

### Standard Report

29 September, 2014

Well Coordinates: 1,286,907.57 N, 3,178,789.59 E (40° 07' 09.07" N, 104° 51' 38.49" W)

Ground Level: 4,963.00 usft

Local Coordinate Origin:

Viewing Datum:

TVDs to System:

North Reference:

Unit System:

Geodetic Scale Factor Applied

Version: 5000.1 Build: 70

Centered on Well Small Eyed 35C-35HZ

RKB = 25' @ 4988.00usft (H&P 308)

N

True

API - US Survey Feet - Custom

**HALLIBURTON**

**Design Report for Small Eyed 35C-35HZ - Actual Surveys**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25.00	0.00	0.00	25.00	0.00	0.00	0.00	0.00
125.00	0.11	281.55	125.00	0.02	-0.09	-0.02	0.11
225.00	0.37	327.71	225.00	0.31	-0.36	-0.31	0.30
325.00	0.42	320.90	325.00	0.87	-0.76	-0.86	0.07
425.00	0.32	329.42	424.99	1.39	-1.14	-1.38	0.11
525.00	0.32	4.02	524.99	1.91	-1.26	-1.89	0.19
625.00	0.39	28.80	624.99	2.49	-1.08	-2.47	0.17
725.00	0.54	42.90	724.99	3.13	-0.59	-3.12	0.19
825.00	0.48	58.92	824.98	3.69	0.09	-3.70	0.15
925.00	0.24	90.16	924.98	3.91	0.66	-3.92	0.30
1,025.00	0.24	156.62	1,024.98	3.72	0.95	-3.73	0.26
1,125.00	0.26	254.83	1,124.98	3.47	0.81	-3.48	0.38
1,225.00	0.37	272.87	1,224.98	3.42	0.27	-3.43	0.15
1,245.00	0.36	273.93	1,244.98	3.43	0.14	-3.43	0.06
<b>Tie-On to Surface Gyros @ 1245.00ft</b>							
1,330.40	0.39	287.51	1,330.38	3.54	-0.40	-3.53	0.11
<b>9 5/8" Casing Set @ 1330.4' MD :: 1330.38' TVD</b>							
1,390.00	0.42	295.59	1,389.98	3.69	-0.79	-3.68	0.11
<b>First MWD Survey @ 1390.00ft</b>							
1,482.00	0.70	284.96	1,481.97	3.98	-1.64	-3.96	0.32
1,574.00	0.54	289.91	1,573.97	4.27	-2.59	-4.23	0.18
1,666.00	2.40	277.41	1,665.93	4.67	-4.91	-4.59	2.04
1,758.00	3.88	288.85	1,757.79	5.92	-9.76	-5.77	1.74
1,851.00	5.58	279.06	1,850.47	7.65	-17.21	-7.39	2.02
1,944.00	7.42	287.55	1,942.87	10.18	-27.40	-9.75	2.23
2,036.00	8.76	278.86	2,033.96	13.05	-39.98	-12.43	1.97
2,129.00	9.49	275.22	2,125.78	14.83	-54.62	-13.99	1.00
2,221.00	8.43	270.04	2,216.66	15.53	-68.91	-14.47	1.45
2,313.00	8.92	269.67	2,307.61	15.49	-82.79	-14.22	0.54
2,404.00	10.14	276.10	2,397.35	16.30	-97.81	-14.80	1.78
2,497.00	9.75	277.83	2,488.95	18.25	-113.75	-16.50	0.53
2,589.00	10.48	274.16	2,579.53	19.91	-129.82	-17.92	1.06
2,682.00	10.53	271.20	2,670.97	20.71	-146.75	-18.45	0.58
2,776.00	9.32	271.19	2,763.56	21.04	-162.94	-18.54	1.29
2,871.00	10.62	268.77	2,857.12	21.02	-179.39	-18.26	1.44
2,965.00	10.33	271.19	2,949.56	21.01	-196.47	-17.99	0.56
3,060.00	9.79	268.50	3,043.10	20.97	-213.06	-17.70	0.75
3,155.00	9.86	270.29	3,136.70	20.80	-229.27	-17.28	0.33
3,249.00	9.60	264.46	3,229.35	20.08	-245.12	-16.32	1.08
3,344.00	9.50	264.26	3,323.04	18.54	-260.81	-14.53	0.11
3,438.00	9.39	263.18	3,415.76	16.85	-276.14	-12.61	0.22
3,533.00	10.39	259.72	3,509.35	14.40	-292.26	-9.91	1.22
3,628.00	9.73	256.71	3,602.89	11.03	-308.51	-6.29	0.89
3,722.00	9.85	262.07	3,695.52	8.09	-324.20	-3.11	0.98
3,817.00	9.67	263.18	3,789.15	6.02	-340.17	-0.80	0.27
3,912.00	10.22	266.83	3,882.72	4.61	-356.51	0.87	0.88
4,006.00	10.08	270.46	3,975.25	4.21	-373.06	1.52	0.70
4,101.00	9.38	268.47	4,068.88	4.07	-389.11	1.90	0.82
4,195.00	9.87	274.49	4,161.56	4.50	-404.80	1.72	1.19

**Design Report for Small Eyed 35C-35HZ - Actual Surveys**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)
4,290.00	10.15	276.80	4,255.12	6.13	-421.23	0.34	0.52
4,384.00	10.18	276.82	4,347.64	8.10	-437.70	-1.37	0.03
4,479.00	8.88	279.05	4,441.33	10.25	-453.28	-3.28	1.42
4,574.00	8.01	281.45	4,535.30	12.71	-467.01	-5.54	0.99
4,668.00	6.66	279.84	4,628.53	14.94	-478.80	-7.59	1.45
4,763.00	3.43	272.50	4,723.15	16.01	-487.07	-8.53	3.46
4,857.00	3.27	274.79	4,816.99	16.36	-492.55	-8.79	0.22
4,952.00	1.64	270.08	4,911.90	16.59	-496.61	-8.96	1.73
5,047.00	1.52	300.77	5,006.86	17.23	-499.05	-9.57	0.89
5,142.00	0.81	4.79	5,101.84	18.55	-500.08	-10.86	1.45
5,236.00	0.60	346.83	5,195.84	19.69	-500.14	-12.00	0.32
5,331.00	0.52	99.61	5,290.83	20.10	-499.82	-12.42	0.98
5,426.00	0.37	148.40	5,385.83	19.77	-499.24	-12.10	0.41
5,520.00	0.34	68.77	5,479.83	19.61	-498.82	-11.95	0.48
5,615.00	0.33	108.25	5,574.83	19.62	-498.30	-11.97	0.24
5,709.00	0.22	62.87	5,668.83	19.62	-497.88	-11.97	0.25
5,804.00	0.26	95.15	5,763.83	19.69	-497.50	-12.04	0.15
5,899.00	0.33	61.48	5,858.83	19.80	-497.05	-12.16	0.19
5,993.00	0.46	47.70	5,952.82	20.18	-496.53	-12.55	0.17
6,088.00	0.26	83.56	6,047.82	20.46	-496.03	-12.84	0.31
6,182.00	0.35	234.77	6,141.82	20.32	-496.06	-12.70	0.63
6,277.00	0.31	246.11	6,236.82	20.05	-496.53	-12.42	0.08
6,372.00	0.46	248.79	6,331.82	19.81	-497.12	-12.17	0.16
6,466.00	0.68	197.67	6,425.81	19.14	-497.64	-11.49	0.56
6,561.00	0.62	213.08	6,520.81	18.17	-498.09	-10.52	0.19
6,656.00	0.89	179.90	6,615.80	17.00	-498.37	-9.35	0.53
6,750.00	0.59	193.52	6,709.79	15.80	-498.48	-8.14	0.37
6,844.00	0.46	196.35	6,803.79	14.97	-498.70	-7.31	0.14
6,939.00	0.50	270.01	6,898.79	14.60	-499.22	-6.93	0.61
7,034.00	1.03	197.49	6,993.78	13.79	-499.90	-6.11	1.05
7,081.00	3.83	191.37	7,040.73	11.85	-500.33	-4.16	5.97
7,128.00	7.00	182.34	7,087.52	7.44	-500.76	0.25	6.96
7,175.00	11.53	179.57	7,133.89	-0.12	-500.84	7.81	9.68
7,223.00	14.55	186.44	7,180.65	-10.91	-501.48	18.61	7.06
7,270.00	18.57	189.73	7,225.69	-24.16	-503.41	31.89	8.78
7,318.00	24.39	185.22	7,270.34	-41.58	-505.60	49.34	12.60
7,365.00	28.84	180.03	7,312.36	-62.59	-506.49	70.36	10.67
7,411.00	34.26	177.72	7,351.55	-86.64	-505.98	94.40	12.07
7,458.00	41.82	176.96	7,388.54	-115.55	-504.62	123.29	16.12
7,506.00	48.40	175.69	7,422.39	-149.46	-502.42	157.16	13.84
7,553.00	53.64	176.02	7,451.95	-185.89	-499.79	193.55	11.16
7,601.00	59.41	180.23	7,478.42	-225.88	-498.53	233.51	14.07
7,648.00	63.96	183.26	7,500.71	-267.22	-499.81	274.86	11.22
7,695.00	67.49	182.44	7,520.03	-310.00	-501.94	317.67	7.68
7,742.00	70.47	182.40	7,536.89	-353.83	-503.79	361.53	6.34
7,790.00	73.98	182.94	7,551.54	-399.48	-505.92	407.20	7.39
7,837.00	77.57	181.71	7,563.09	-445.00	-507.76	452.74	8.05
7,884.00	80.28	181.24	7,572.12	-491.10	-508.95	498.86	5.85
7,902.00	82.64	180.95	7,574.79	-508.90	-509.29	516.66	13.21
7,940.80	83.64	180.82	7,579.42	-547.41	-509.89	555.18	2.59

7" Casing Set @ 7940.8' MD :: 7579.42' TVD

**Design Report for Small Eyed 35C-35HZ - Actual Surveys**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)
8,019.00	85.65	180.56	7,586.72	-625.26	-510.82	633.03	2.59
8,114.00	85.93	180.77	7,593.70	-720.00	-511.92	727.78	0.37
8,208.00	87.69	180.92	7,598.93	-813.84	-513.31	821.63	1.88
8,302.00	90.55	181.62	7,600.37	-907.79	-515.39	915.60	3.13
8,397.00	91.08	181.95	7,599.02	-1,002.74	-518.35	1,010.58	0.66
8,492.00	91.48	181.87	7,596.90	-1,097.66	-521.51	1,105.54	0.43
8,586.00	91.82	182.12	7,594.19	-1,191.57	-524.78	1,199.49	0.45
8,681.00	92.28	181.65	7,590.79	-1,286.45	-527.91	1,294.41	0.69
8,775.00	90.99	181.93	7,588.11	-1,380.37	-530.84	1,388.36	1.40
8,869.00	86.89	180.89	7,589.85	-1,474.30	-533.16	1,482.32	4.50
8,963.00	88.83	180.80	7,593.36	-1,568.22	-534.54	1,576.25	2.07
9,058.00	89.48	180.55	7,594.76	-1,663.20	-535.66	1,671.23	0.73
9,152.00	90.31	180.85	7,594.93	-1,757.20	-536.81	1,765.23	0.94
9,246.00	90.68	180.23	7,594.12	-1,851.19	-537.69	1,859.23	0.77
9,340.00	89.75	179.60	7,593.77	-1,945.18	-537.55	1,953.21	1.19
9,434.00	90.12	179.58	7,593.87	-2,039.18	-536.88	2,047.19	0.39
9,529.00	89.75	180.07	7,593.98	-2,134.18	-536.59	2,142.17	0.65
9,623.00	90.28	180.70	7,593.96	-2,228.18	-537.22	2,236.17	0.88
9,717.00	90.77	180.82	7,593.10	-2,322.17	-538.47	2,330.16	0.54
9,811.00	90.86	182.15	7,591.76	-2,416.12	-540.91	2,424.14	1.42
9,906.00	90.37	181.79	7,590.74	-2,511.06	-544.17	2,519.12	0.64
10,000.00	88.89	180.93	7,591.35	-2,605.03	-546.40	2,613.11	1.82
10,094.00	89.08	181.10	7,593.01	-2,699.00	-548.07	2,707.10	0.27
10,188.00	89.94	181.09	7,593.81	-2,792.98	-549.86	2,801.09	0.91
10,282.00	91.05	180.87	7,593.00	-2,886.96	-551.47	2,895.09	1.20
10,374.00	91.29	180.76	7,591.12	-2,978.93	-552.78	2,987.07	0.29
10,466.00	91.05	180.51	7,589.25	-3,070.91	-553.80	3,079.05	0.38
10,557.00	89.82	180.70	7,588.55	-3,161.90	-554.76	3,170.04	1.37
10,649.00	89.91	180.27	7,588.77	-3,253.89	-555.54	3,262.04	0.48
10,740.00	90.34	179.94	7,588.57	-3,344.89	-555.71	3,353.03	0.60
10,832.00	90.46	179.47	7,587.93	-3,436.89	-555.23	3,445.01	0.53
10,923.00	89.69	180.27	7,587.81	-3,527.89	-555.03	3,535.99	1.22
11,015.00	89.82	179.64	7,588.21	-3,619.88	-554.95	3,627.98	0.70
11,107.00	89.91	179.53	7,588.42	-3,711.88	-554.29	3,719.96	0.15
11,199.00	89.11	178.63	7,589.21	-3,803.86	-552.81	3,811.91	1.31
11,292.00	89.20	179.91	7,590.58	-3,896.85	-551.62	3,904.86	1.38
11,383.00	89.97	180.67	7,591.24	-3,987.84	-552.09	3,995.85	1.19
11,476.00	89.91	180.13	7,591.34	-4,080.84	-552.73	4,088.85	0.58
11,569.00	90.89	180.83	7,590.69	-4,173.83	-553.51	4,181.84	1.29
11,661.00	90.74	181.76	7,589.38	-4,265.80	-555.59	4,273.83	1.02
11,754.00	89.32	180.29	7,589.33	-4,358.78	-557.26	4,366.82	2.20
11,846.00	89.20	179.43	7,590.52	-4,450.77	-557.03	4,458.80	0.94
11,938.00	90.77	180.84	7,590.54	-4,542.76	-557.25	4,550.78	2.29
12,030.00	91.45	182.27	7,588.76	-4,634.71	-559.74	4,642.76	1.72
12,122.00	89.69	182.35	7,587.84	-4,726.63	-563.45	4,734.72	1.92
12,215.00	89.60	181.61	7,588.42	-4,819.57	-566.67	4,827.70	0.80
12,306.00	89.97	181.18	7,588.76	-4,910.54	-568.88	4,918.70	0.62
12,397.00	90.34	180.83	7,588.52	-5,001.52	-570.48	5,009.70	0.56
12,489.00	91.32	181.01	7,587.18	-5,093.50	-571.95	5,101.69	1.08
12,581.00	89.48	180.77	7,586.54	-5,185.48	-573.38	5,193.68	2.02
12,673.00	89.57	180.12	7,587.30	-5,277.48	-574.10	5,285.67	0.71

**Design Report for Small Eyed 35C-35HZ - Actual Surveys**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)
12,764.00	89.78	181.51	7,587.82	-5,368.47	-575.39	5,376.67	1.54
12,856.00	89.54	180.92	7,588.37	-5,460.44	-577.34	5,468.67	0.69
12,947.00	89.69	181.03	7,588.98	-5,551.43	-578.89	5,559.66	0.20
13,040.00	89.69	180.82	7,589.48	-5,644.41	-580.39	5,652.66	0.23
13,134.00	89.75	179.89	7,589.94	-5,738.41	-580.97	5,746.66	0.99
13,228.00	91.02	180.94	7,589.31	-5,832.40	-581.65	5,840.65	1.75
13,322.00	89.82	180.99	7,588.62	-5,926.38	-583.24	5,934.64	1.28
13,417.00	89.08	180.72	7,589.53	-6,021.37	-584.66	6,029.64	0.83
13,510.00	89.45	180.32	7,590.72	-6,114.36	-585.50	6,122.63	0.59
13,604.00	89.94	180.57	7,591.23	-6,208.35	-586.23	6,216.62	0.59
13,699.00	89.11	182.06	7,592.01	-6,303.32	-588.41	6,311.61	1.80
13,793.00	88.40	182.25	7,594.06	-6,397.23	-591.94	6,405.57	0.78
13,887.00	87.29	181.19	7,597.59	-6,491.12	-594.76	6,499.49	1.63
13,981.00	88.92	181.52	7,600.70	-6,585.04	-596.98	6,593.43	1.77
14,076.00	89.17	181.01	7,602.28	-6,680.00	-599.08	6,688.41	0.60
14,170.00	90.43	181.13	7,602.61	-6,773.98	-600.84	6,782.41	1.35
14,265.00	90.83	180.85	7,601.57	-6,868.96	-602.48	6,877.41	0.51
14,359.00	90.68	181.69	7,600.33	-6,962.93	-604.56	6,971.39	0.91
14,454.00	90.34	182.31	7,599.48	-7,057.87	-607.88	7,066.37	0.74
14,549.00	90.34	182.09	7,598.92	-7,152.80	-611.52	7,161.34	0.23
14,643.00	90.31	181.12	7,598.38	-7,246.76	-614.16	7,255.33	1.03
14,738.00	89.32	181.09	7,598.69	-7,341.74	-615.99	7,350.33	1.04
14,832.00	89.38	180.05	7,599.76	-7,435.73	-616.92	7,444.32	1.11
14,926.00	88.18	178.96	7,601.76	-7,529.70	-616.11	7,538.27	1.72
15,020.00	88.28	178.68	7,604.66	-7,623.63	-614.18	7,632.17	0.32
15,114.00	89.20	178.15	7,606.73	-7,717.57	-611.58	7,726.06	1.13
15,208.00	90.18	177.88	7,607.24	-7,811.51	-608.32	7,819.94	1.08
15,302.00	91.48	177.40	7,605.88	-7,905.42	-604.45	7,913.77	1.47
15,397.00	91.45	178.25	7,603.45	-8,000.32	-600.85	8,008.61	0.90
15,491.00	88.06	178.27	7,603.85	-8,094.26	-597.99	8,102.49	3.61
15,586.00	89.35	178.68	7,606.00	-8,189.20	-595.47	8,197.38	1.42
15,680.00	91.05	179.52	7,605.67	-8,283.19	-593.99	8,291.33	2.02
15,775.00	90.86	180.50	7,604.08	-8,378.17	-594.01	8,386.31	1.05
15,869.00	90.09	179.81	7,603.30	-8,472.17	-594.26	8,480.30	1.10
15,963.00	88.98	179.25	7,604.07	-8,566.16	-593.49	8,574.26	1.32
16,057.00	90.34	180.84	7,604.63	-8,660.15	-593.56	8,668.25	2.23
16,151.00	91.36	181.73	7,603.23	-8,754.12	-595.67	8,762.23	1.44
16,245.00	91.29	182.89	7,601.06	-8,848.01	-599.46	8,856.18	1.24
16,339.00	90.52	181.86	7,599.57	-8,941.92	-603.35	8,950.13	1.37
16,433.00	91.05	182.81	7,598.28	-9,035.83	-607.18	9,044.09	1.16
16,528.00	89.85	183.23	7,597.54	-9,130.69	-612.19	9,139.02	1.34
16,623.00	89.85	184.25	7,597.79	-9,225.49	-618.38	9,233.90	1.07
16,717.00	90.18	184.52	7,597.76	-9,319.21	-625.57	9,327.72	0.45
16,812.00	89.41	185.14	7,598.10	-9,413.88	-633.57	9,422.50	1.04
16,907.00	87.63	184.50	7,600.56	-9,508.50	-641.55	9,517.24	1.99
17,002.00	90.18	184.21	7,602.37	-9,603.20	-648.76	9,612.04	2.70
17,097.00	91.29	183.89	7,601.15	-9,697.96	-655.47	9,706.88	1.22
17,192.00	90.62	182.90	7,599.57	-9,792.78	-661.09	9,801.77	1.26
17,287.00	91.54	182.27	7,597.78	-9,887.66	-665.38	9,896.71	1.17
17,382.00	92.12	181.73	7,594.75	-9,982.55	-668.69	9,991.65	0.83
17,476.00	91.82	181.54	7,591.51	-10,076.46	-671.37	10,085.58	0.38

**Design Report for Small Eyed 35C-35HZ - Actual Surveys**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)
17,571.00	91.27	180.33	7,588.95	-10,171.41	-672.92	10,180.55	1.40
17,667.00	87.25	180.03	7,590.19	-10,267.38	-673.22	10,276.51	4.20
17,761.00	88.55	180.75	7,593.64	-10,361.31	-673.86	10,370.44	1.58
17,856.00	88.83	181.00	7,595.81	-10,456.28	-675.31	10,465.42	0.40
17,976.00	88.43	180.43	7,598.68	-10,576.23	-676.81	10,585.38	0.58
<b>Final MWD Survey @ 17976.00ft</b>							
18,020.00	88.43	180.43	7,599.88	-10,620.22	-677.14	10,629.36	0.00
<b>Str Line Proj to Bit @ 18020' MD :: 7599.88' TVD</b>							

**Design Annotations**

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,245.00	1,244.98	3.43	0.14	Tie-On to Surface Gyros @ 1245.00ft
1,390.00	1,389.98	3.69	-0.79	First MWD Survey @ 1390.00ft
17,976.00	7,598.68	-10,576.23	-676.81	Final MWD Survey @ 17976.00ft
18,020.00	7,599.88	-10,620.22	-677.14	Str Line Proj to Bit @ 18020' MD :: 7599.88' TVD

**Vertical Section Information**

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (usft)
				+N/_S (usft)	+E/-W (usft)	
User	No Target (Freehand)	180.88	Slot	0.00	0.00	0.00

**Survey tool program**

From (usft)	To (usft)	Survey/Plan	Survey Tool
25.00	1,245.00	MS Energy Gyros	NS-GYRO-MS
1,390.00	8,208.00	MWD Vertical/Build Surveys	MWD+IFR1+SC
8,302.00	17,976.00	MWD Lateral Surveys	MWD+IFR1+SC

**Casing Details**

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
1,330.40	1,330.38	9 5/8" Casing Set @ 1330.4' MD :: 1330.38' TVD	9-5/8	13-1/2
7,940.80	7,579.42	7" Casing Set @ 7940.8' MD :: 7579.42' TVD	7	8-3/4

## Design Report for Small Eyed 35C-35HZ - Actual Surveys

**Wellbore Targets**

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SMALL EYED 35N-35I	0.00	0.00	0.00	0.01	0.00	1,286,907.58	3,178,789.59	40° 7' 9.066 N	104° 51' 38.495 W
- actual wellpath misses target center by 0.01usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1				0.00	-6,244.84	-1,958.29	1,280,649.04	3,176,876.45	
Point 2				0.00	-6,257.54	677.08	1,280,655.34	3,179,511.74	
Point 3				0.00	-6,269.43	3,311.73	1,280,662.44	3,182,146.30	
Point 4				0.00	-11,527.78	3,317.29	1,275,404.48	3,182,189.77	
Point 5				0.00	-11,538.27	718.61	1,275,375.26	3,179,591.33	
Point 6				0.00	-11,540.79	-1,952.49	1,275,353.48	3,176,920.43	
SMALL EYED 35C-35I	0.00	0.00	0.00	0.01	0.00	1,286,907.59	3,178,789.59	40° 7' 9.066 N	104° 51' 38.495 W
- actual wellpath misses target center by 0.01usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1				0.00	-156.74	-1,041.76	1,286,743.35	3,177,749.03	
Point 2				0.00	-162.48	-121.74	1,286,744.24	3,178,669.03	
Point 3				0.00	-6,253.41	-180.59	1,280,653.29	3,178,654.10	
Point 4				0.00	-11,079.08	-159.75	1,275,828.09	3,178,709.72	
Point 5				0.00	-11,079.96	-1,079.80	1,275,820.58	3,177,789.74	
Point 6				0.00	-6,248.98	-1,100.63	1,280,651.09	3,177,734.08	
SMALL EYED 35C-35I	0.00	0.00	0.00	0.01	0.00	1,286,907.59	3,178,789.59	40° 7' 9.066 N	104° 51' 38.495 W
- actual wellpath misses target center by 0.01usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									
SMALL EYED 35C-35I	0.00	0.00	0.00	0.01	0.00	1,286,907.59	3,178,789.59	40° 7' 9.066 N	104° 51' 38.495 W
- actual wellpath misses target center by 0.01usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1				0.00	4,264.29	-1,872.65	1,291,158.09	3,176,886.32	
Point 2				0.00	4,242.19	750.50	1,291,154.91	3,179,509.46	
Point 3				0.00	4,223.73	3,380.49	1,291,155.41	3,182,139.41	
Point 4				0.00	1,589.21	3,369.67	1,288,520.98	3,182,147.58	
Point 5				0.00	-1,038.23	3,358.09	1,285,893.64	3,182,154.94	
Point 6				0.00	-1,010.41	-1,901.87	1,285,883.53	3,176,895.13	
Point 7				0.00	-1,038.23	3,358.09	1,285,893.64	3,182,154.94	
Point 8				0.00	-3,631.18	3,337.82	1,283,300.71	3,182,153.37	
Point 9				0.00	-6,269.44	3,311.73	1,280,662.44	3,182,146.30	
Point 10				0.00	-6,257.54	677.08	1,280,655.34	3,179,511.74	
Point 11				0.00	-6,244.84	-1,958.29	1,280,649.04	3,176,876.45	
Point 12				0.00	-3,621.97	-1,932.52	1,283,271.93	3,176,883.31	
Point 13				0.00	-1,010.41	-1,901.87	1,285,883.53	3,176,895.13	
SMALL EYED 35C-35I	0.00	0.00	7,593.00	-10,619.47	-655.11	1,276,284.09	3,178,211.08	40° 5' 24.122 N	104° 51' 46.924 W
- actual wellpath misses target center by 23.07usft at 18018.90usft MD (7599.85 TVD, -10619.12 N, -677.13 E)									
- Point									

**Directional Difficulty Index**

Average Dogleg over Survey:	1.41 °/100usft	Maximum Dogleg over Survey:	16.12 °/100usft at 7,458.00 usft
Net Tortousity applicable to Plans:	0.62 °/100usft	Directional Difficulty Index:	6.827

**Audit Info**



North Reference Sheet for Sec. 23-T2N-R67W - Small Eyed 35C-35HZ - Plan C

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to True North Reference.

Vertical Depths are relative to RKB = 25' @ 4988.00usft (H&P 308). Northing and Easting are relative to Small Eyed 35C-35HZ

Coordinate System is US State Plane 1983, Colorado Northern Zone using datum North American Datum 1983, ellipsoid GRS 1980

Projection method is Lambert Conformal Conic (2 parallel)

Central Meridian is 105° 30' 0.000 W°, Longitude Origin:0° 0' 0.000 E°, Latitude Origin:40° 47' 0.000 N°

False Easting: 3,000,000.00usft, False Northing: 1,000,000.00usft, Scale Reduction: 0.99995947


Grid Coordinates of Well: 1,286,907.57 usft N, 3,178,789.59 usft E

Geographical Coordinates of Well: 40° 07' 09.07" N, 104° 51' 38.49" W

Grid Convergence at Surface is: 0.41°

Based upon Minimum Curvature type calculations, at a Measured Depth of 18,020.00usft the Bottom Hole Displacement is 10,641.78usft in the Direction of 183.65° (True).

Magnetic Convergence at surface is: -8.14° (31 July 2014, , BGGM2014)

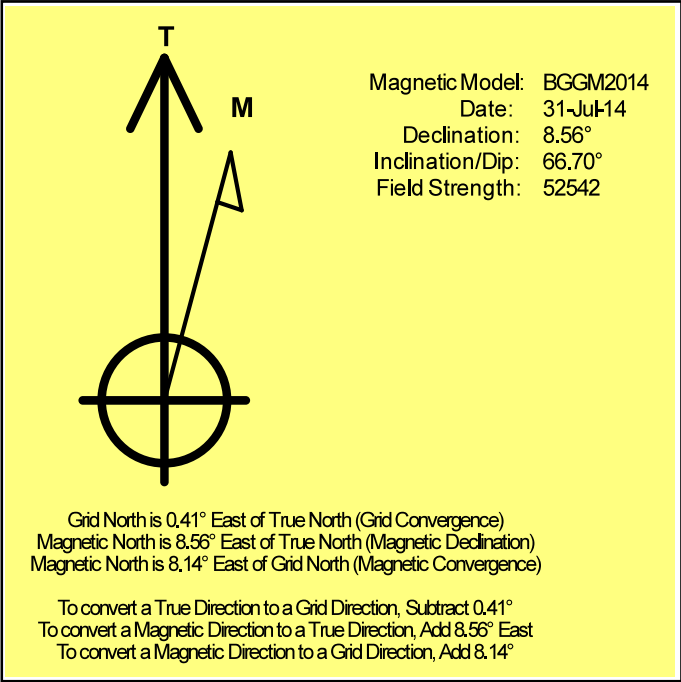

# Anadarko Petroleum Corp.

Weld County, CO (NAD 83)

Sec. 23-T2N-R67W

Small Eyed 35C-35HZ

Plan C

Design: Actual Surveys

## Sperry Drilling Services

### Geodetic Report

29 September, 2014

Well Coordinates: 1,286,907.57 N, 3,178,789.59 E (40° 07' 09.07" N, 104° 51' 38.49" W)

Ground Level: 4,963.00 usft

Local Coordinate Origin:

Viewing Datum:

TVDs to System:

North Reference:

Unit System:

Geodetic Scale Factor Applied

Version: 5000.1 Build: 70

Centered on Well Small Eyed 35C-35HZ

RKB = 25' @ 4988.00usft (H&P 308)

N

True

Dec-Deg - API - US Survey Feet - Custom

## HALLIBURTON

## Design Report for Small Eyed 35C-35HZ - Actual Surveys

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Geographic Coordinates		UTM Coordinates	
				+N/-S (usft)	+E/-W (usft)	Latitude (usft)	Longitude (usft)	Northing (usft)	Easting (usft)
0.00	0.00	0.00	0.00	0.00	0.00	40.119185	-104.860693	1,286,907.57	3,178,789.59
25.00	0.00	0.00	25.00	0.00	0.00	40.119185	-104.860693	1,286,907.57	3,178,789.59
125.00	0.11	281.55	125.00	0.02	-0.09	40.119185	-104.860694	1,286,907.59	3,178,789.50
225.00	0.37	327.71	225.00	0.31	-0.36	40.119186	-104.860695	1,286,907.88	3,178,789.23
325.00	0.42	320.90	325.00	0.87	-0.76	40.119187	-104.860696	1,286,908.44	3,178,788.82
425.00	0.32	329.42	424.99	1.39	-1.14	40.119189	-104.860697	1,286,908.96	3,178,788.44
525.00	0.32	4.02	524.99	1.91	-1.26	40.119190	-104.860698	1,286,909.48	3,178,788.32
625.00	0.39	28.80	624.99	2.49	-1.08	40.119192	-104.860697	1,286,910.06	3,178,788.50
725.00	0.54	42.90	724.99	3.13	-0.59	40.119194	-104.860695	1,286,910.70	3,178,788.98
825.00	0.48	58.92	824.98	3.69	0.09	40.119195	-104.860693	1,286,911.27	3,178,789.65
925.00	0.24	90.16	924.98	3.91	0.66	40.119196	-104.860691	1,286,911.49	3,178,790.22
1,025.00	0.24	156.62	1,024.98	3.72	0.95	40.119195	-104.860690	1,286,911.30	3,178,790.51
1,125.00	0.26	254.83	1,124.98	3.47	0.81	40.119195	-104.860690	1,286,911.05	3,178,790.38
1,225.00	0.37	272.87	1,224.98	3.42	0.27	40.119194	-104.860692	1,286,911.00	3,178,789.84
1,245.00	0.36	273.93	1,244.98	3.43	0.14	40.119194	-104.860693	1,286,911.01	3,178,789.71
1,330.40	0.39	287.51	1,330.38	3.54	-0.40	40.119195	-104.860695	1,286,911.11	3,178,789.17
1,390.00	0.42	295.59	1,389.98	3.69	-0.79	40.119195	-104.860696	1,286,911.26	3,178,788.77
1,482.00	0.70	284.96	1,481.97	3.98	-1.64	40.119196	-104.860699	1,286,911.54	3,178,787.93
1,574.00	0.54	289.91	1,573.97	4.27	-2.59	40.119197	-104.860703	1,286,911.83	3,178,786.97
1,666.00	2.40	277.41	1,665.93	4.67	-4.91	40.119198	-104.860711	1,286,912.21	3,178,784.65
1,758.00	3.88	288.85	1,757.79	5.92	-9.76	40.119201	-104.860728	1,286,913.43	3,178,779.79
1,851.00	5.58	279.06	1,850.47	7.65	-17.21	40.119206	-104.860755	1,286,915.10	3,178,772.33
1,944.00	7.42	287.55	1,942.87	10.18	-27.40	40.119213	-104.860791	1,286,917.55	3,178,762.12
2,036.00	8.76	278.86	2,033.96	13.05	-39.98	40.119221	-104.860836	1,286,920.33	3,178,749.52
2,129.00	9.49	275.22	2,125.78	14.83	-54.62	40.119226	-104.860889	1,286,922.01	3,178,734.87
2,221.00	8.43	270.04	2,216.66	15.53	-68.91	40.119228	-104.860940	1,286,922.61	3,178,720.57
2,313.00	8.92	269.67	2,307.61	15.49	-82.79	40.119228	-104.860989	1,286,922.47	3,178,706.70
2,404.00	10.14	276.10	2,397.35	16.30	-97.81	40.119230	-104.861043	1,286,923.17	3,178,691.67
2,497.00	9.75	277.83	2,488.95	18.25	-113.75	40.119235	-104.861100	1,286,925.00	3,178,675.71
2,589.00	10.48	274.16	2,579.53	19.91	-129.82	40.119240	-104.861157	1,286,926.55	3,178,659.64
2,682.00	10.53	271.20	2,670.97	20.71	-146.75	40.119242	-104.861218	1,286,927.22	3,178,642.70
2,776.00	9.32	271.19	2,763.56	21.04	-162.94	40.119243	-104.861276	1,286,927.44	3,178,626.51
2,871.00	10.62	268.77	2,857.12	21.02	-179.39	40.119243	-104.861335	1,286,927.30	3,178,610.06
2,965.00	10.33	271.19	2,949.56	21.01	-196.47	40.119243	-104.861396	1,286,927.16	3,178,592.98
3,060.00	9.79	268.50	3,043.10	20.97	-213.06	40.119243	-104.861455	1,286,927.01	3,178,576.39
3,155.00	9.86	270.29	3,136.70	20.80	-229.27	40.119242	-104.861513	1,286,926.72	3,178,560.18
3,249.00	9.60	264.46	3,229.35	20.08	-245.12	40.119240	-104.861570	1,286,925.89	3,178,544.34
3,344.00	9.50	264.26	3,323.04	18.54	-260.81	40.119236	-104.861626	1,286,924.23	3,178,528.67
3,438.00	9.39	263.18	3,415.76	16.85	-276.14	40.119231	-104.861681	1,286,922.43	3,178,513.35
3,533.00	10.39	259.72	3,509.35	14.40	-292.26	40.119225	-104.861738	1,286,919.87	3,178,497.24
3,628.00	9.73	256.71	3,602.89	11.03	-308.51	40.119215	-104.861796	1,286,916.38	3,178,481.03
3,722.00	9.85	262.07	3,695.52	8.09	-324.20	40.119207	-104.861852	1,286,913.33	3,178,465.35

## Design Report for Small Eyed 35C-35HZ - Actual Surveys

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Geographic Coordinates		UTM Coordinates	
				+N/-S (usft)	+E/-W (usft)	Latitude (usft)	Longitude (usft)	Northing (usft)	Easting (usft)
3,817.00	9.67	263.18	3,789.15	6.02	-340.17	40.119202	-104.861910	1,286,911.14	3,178,449.40
3,912.00	10.22	266.83	3,882.72	4.61	-356.51	40.119198	-104.861968	1,286,909.61	3,178,433.07
4,006.00	10.08	270.46	3,975.25	4.21	-373.06	40.119197	-104.862027	1,286,909.10	3,178,416.52
4,101.00	9.38	268.47	4,068.88	4.07	-389.11	40.119196	-104.862085	1,286,908.84	3,178,400.47
4,195.00	9.87	274.49	4,161.56	4.50	-404.80	40.119197	-104.862141	1,286,909.16	3,178,384.78
4,290.00	10.15	276.80	4,255.12	6.13	-421.23	40.119202	-104.862199	1,286,910.67	3,178,368.34
4,384.00	10.18	276.82	4,347.64	8.10	-437.70	40.119207	-104.862258	1,286,912.51	3,178,351.86
4,479.00	8.88	279.05	4,441.33	10.25	-453.28	40.119213	-104.862314	1,286,914.55	3,178,336.27
4,574.00	8.01	281.45	4,535.30	12.71	-467.01	40.119220	-104.862363	1,286,916.92	3,178,322.52
4,668.00	6.66	279.84	4,628.53	14.94	-478.80	40.119226	-104.862405	1,286,919.07	3,178,310.71
4,763.00	3.43	272.50	4,723.15	16.01	-487.07	40.119229	-104.862435	1,286,920.07	3,178,302.44
4,857.00	3.27	274.79	4,816.99	16.36	-492.55	40.119230	-104.862454	1,286,920.38	3,178,296.95
4,952.00	1.64	270.08	4,911.90	16.59	-496.61	40.119231	-104.862469	1,286,920.58	3,178,292.89
5,047.00	1.52	300.77	5,006.86	17.23	-499.05	40.119232	-104.862478	1,286,921.21	3,178,290.45
5,142.00	0.81	4.79	5,101.84	18.55	-500.08	40.119236	-104.862481	1,286,922.51	3,178,289.41
5,236.00	0.60	346.83	5,195.84	19.69	-500.14	40.119239	-104.862482	1,286,923.65	3,178,289.35
5,331.00	0.52	99.61	5,290.83	20.10	-499.82	40.119240	-104.862480	1,286,924.07	3,178,289.65
5,426.00	0.37	148.40	5,385.83	19.77	-499.24	40.119239	-104.862478	1,286,923.74	3,178,290.24
5,520.00	0.34	68.77	5,479.83	19.61	-498.82	40.119239	-104.862477	1,286,923.59	3,178,290.66
5,615.00	0.33	108.25	5,574.83	19.62	-498.30	40.119239	-104.862475	1,286,923.61	3,178,291.19
5,709.00	0.22	62.87	5,668.83	19.62	-497.88	40.119239	-104.862473	1,286,923.61	3,178,291.60
5,804.00	0.26	95.15	5,763.83	19.69	-497.50	40.119239	-104.862472	1,286,923.67	3,178,291.98
5,899.00	0.33	61.48	5,858.83	19.80	-497.05	40.119239	-104.862470	1,286,923.79	3,178,292.43
5,993.00	0.46	47.70	5,952.82	20.18	-496.53	40.119240	-104.862469	1,286,924.17	3,178,292.95
6,088.00	0.26	83.56	6,047.82	20.46	-496.03	40.119241	-104.862467	1,286,924.46	3,178,293.44
6,182.00	0.35	234.77	6,141.82	20.32	-496.06	40.119241	-104.862467	1,286,924.32	3,178,293.42
6,277.00	0.31	246.11	6,236.82	20.05	-496.53	40.119240	-104.862469	1,286,924.04	3,178,292.95
6,372.00	0.46	248.79	6,331.82	19.81	-497.12	40.119239	-104.862471	1,286,923.80	3,178,292.36
6,466.00	0.68	197.67	6,425.81	19.14	-497.64	40.119238	-104.862473	1,286,923.12	3,178,291.85
6,561.00	0.62	213.08	6,520.81	18.17	-498.09	40.119235	-104.862474	1,286,922.15	3,178,291.40
6,656.00	0.89	179.90	6,615.80	17.00	-498.37	40.119232	-104.862475	1,286,920.98	3,178,291.13
6,750.00	0.59	193.52	6,709.79	15.80	-498.48	40.119228	-104.862476	1,286,919.78	3,178,291.03
6,844.00	0.46	196.35	6,803.79	14.97	-498.70	40.119226	-104.862476	1,286,918.95	3,178,290.81
6,939.00	0.50	270.01	6,898.79	14.60	-499.22	40.119225	-104.862478	1,286,918.58	3,178,290.29
7,034.00	1.03	197.49	6,993.78	13.79	-499.90	40.119223	-104.862481	1,286,917.76	3,178,289.63
7,081.00	3.83	191.37	7,040.73	11.85	-500.33	40.119218	-104.862482	1,286,915.81	3,178,289.21
7,128.00	7.00	182.34	7,087.52	7.44	-500.76	40.119205	-104.862484	1,286,911.41	3,178,288.81
7,175.00	11.53	179.57	7,133.89	-0.12	-500.84	40.119185	-104.862484	1,286,903.85	3,178,288.79
7,223.00	14.55	186.44	7,180.65	-10.91	-501.48	40.119155	-104.862486	1,286,893.05	3,178,288.22
7,270.00	18.57	189.73	7,225.69	-24.16	-503.41	40.119119	-104.862493	1,286,879.79	3,178,286.39
7,318.00	24.39	185.22	7,270.34	-41.58	-505.60	40.119071	-104.862501	1,286,862.36	3,178,284.32
7,365.00	28.84	180.03	7,312.36	-62.59	-506.49	40.119013	-104.862504	1,286,841.34	3,178,283.58

## Design Report for Small Eyed 35C-35HZ - Actual Surveys

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Geographic Coordinates		UTM Coordinates	
				+N/-S (usft)	+E/-W (usft)	Latitude (usft)	Longitude (usft)	Northing (usft)	Easting (usft)
7,411.00	34.26	177.72	7,351.55	-86.64	-505.98	40.118947	-104.862502	1,286,817.29	3,178,284.27
7,458.00	41.82	176.96	7,388.54	-115.55	-504.62	40.118868	-104.862498	1,286,788.40	3,178,285.83
7,506.00	48.40	175.69	7,422.39	-149.46	-502.42	40.118775	-104.862490	1,286,754.50	3,178,288.28
7,553.00	53.64	176.02	7,451.95	-185.89	-499.79	40.118675	-104.862480	1,286,718.09	3,178,291.18
7,601.00	59.41	180.23	7,478.42	-225.88	-498.53	40.118565	-104.862476	1,286,678.12	3,178,292.72
7,648.00	63.96	183.26	7,500.71	-267.22	-499.81	40.118451	-104.862480	1,286,636.77	3,178,291.74
7,695.00	67.49	182.44	7,520.03	-310.00	-501.94	40.118334	-104.862488	1,286,593.97	3,178,289.92
7,742.00	70.47	182.40	7,536.89	-353.83	-503.79	40.118214	-104.862495	1,286,550.14	3,178,288.39
7,790.00	73.98	182.94	7,551.54	-399.48	-505.92	40.118088	-104.862502	1,286,504.47	3,178,286.58
7,837.00	77.57	181.71	7,563.09	-445.00	-507.76	40.117963	-104.862509	1,286,458.95	3,178,285.07
7,884.00	80.28	181.24	7,572.12	-491.10	-508.95	40.117837	-104.862513	1,286,412.84	3,178,284.22
7,902.00	82.64	180.95	7,574.79	-508.90	-509.29	40.117788	-104.862514	1,286,395.04	3,178,284.00
7,940.80	83.64	180.82	7,579.42	-547.41	-509.89	40.117682	-104.862516	1,286,356.52	3,178,283.69
8,019.00	85.65	180.56	7,586.72	-625.26	-510.82	40.117469	-104.862520	1,286,278.67	3,178,283.31
8,114.00	85.93	180.77	7,593.70	-720.00	-511.92	40.117209	-104.862524	1,286,183.93	3,178,282.89
8,208.00	87.69	180.92	7,598.93	-813.84	-513.31	40.116951	-104.862529	1,286,090.09	3,178,282.19
8,302.00	90.55	181.62	7,600.37	-907.79	-515.39	40.116693	-104.862536	1,285,996.12	3,178,280.78
8,397.00	91.08	181.95	7,599.02	-1,002.74	-518.35	40.116432	-104.862547	1,285,901.17	3,178,278.51
8,492.00	91.48	181.87	7,596.90	-1,097.66	-521.51	40.116172	-104.862558	1,285,806.23	3,178,276.03
8,586.00	91.82	182.12	7,594.19	-1,191.57	-524.78	40.115914	-104.862570	1,285,712.30	3,178,273.43
8,681.00	92.28	181.65	7,590.79	-1,286.45	-527.91	40.115654	-104.862581	1,285,617.40	3,178,270.99
8,775.00	90.99	181.93	7,588.11	-1,380.37	-530.84	40.115396	-104.862591	1,285,523.47	3,178,268.73
8,869.00	86.89	180.89	7,589.85	-1,474.30	-533.16	40.115138	-104.862599	1,285,429.53	3,178,267.10
8,963.00	88.83	180.80	7,593.36	-1,568.22	-534.54	40.114880	-104.862604	1,285,335.60	3,178,266.39
9,058.00	89.48	180.55	7,594.76	-1,663.20	-535.66	40.114619	-104.862608	1,285,240.62	3,178,265.96
9,152.00	90.31	180.85	7,594.93	-1,757.20	-536.81	40.114361	-104.862613	1,285,146.63	3,178,265.49
9,246.00	90.68	180.23	7,594.12	-1,851.19	-537.69	40.114103	-104.862616	1,285,052.63	3,178,265.28
9,340.00	89.75	179.60	7,593.77	-1,945.18	-537.55	40.113845	-104.862615	1,284,958.64	3,178,266.10
9,434.00	90.12	179.58	7,593.87	-2,039.18	-536.88	40.113587	-104.862613	1,284,864.66	3,178,267.45
9,529.00	89.75	180.07	7,593.98	-2,134.18	-536.59	40.113327	-104.862612	1,284,769.67	3,178,268.42
9,623.00	90.28	180.70	7,593.96	-2,228.18	-537.22	40.113069	-104.862614	1,284,675.67	3,178,268.47
9,717.00	90.77	180.82	7,593.10	-2,322.17	-538.47	40.112811	-104.862618	1,284,581.68	3,178,267.90
9,811.00	90.86	182.15	7,591.76	-2,416.12	-540.91	40.112553	-104.862627	1,284,487.71	3,178,266.14
9,906.00	90.37	181.79	7,590.74	-2,511.06	-544.17	40.112292	-104.862639	1,284,392.76	3,178,263.56
10,000.00	88.89	180.93	7,591.35	-2,605.03	-546.40	40.112034	-104.862647	1,284,298.78	3,178,262.01
10,094.00	89.08	181.10	7,593.01	-2,699.00	-548.07	40.111776	-104.862653	1,284,204.80	3,178,261.02
10,188.00	89.94	181.09	7,593.81	-2,792.98	-549.86	40.111518	-104.862659	1,284,110.82	3,178,259.90
10,282.00	91.05	180.87	7,593.00	-2,886.96	-551.47	40.111260	-104.862665	1,284,016.83	3,178,258.97
10,374.00	91.29	180.76	7,591.12	-2,978.93	-552.78	40.111008	-104.862670	1,283,924.86	3,178,258.32
10,466.00	91.05	180.51	7,589.25	-3,070.91	-553.80	40.110755	-104.862673	1,283,832.88	3,178,257.97
10,557.00	89.82	180.70	7,588.55	-3,161.90	-554.76	40.110505	-104.862677	1,283,741.89	3,178,257.66
10,649.00	89.91	180.27	7,588.77	-3,253.89	-555.54	40.110253	-104.862679	1,283,649.89	3,178,257.55

## Design Report for Small Eyed 35C-35HZ - Actual Surveys

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Geographic Coordinates		UTM Coordinates	
				+N/-S (usft)	+E/-W (usft)	Latitude (usft)	Longitude (usft)	Northing (usft)	Easting (usft)
10,740.00	90.34	179.94	7,588.57	-3,344.89	-555.71	40.110003	-104.862680	1,283,558.90	3,178,258.04
10,832.00	90.46	179.47	7,587.93	-3,436.89	-555.23	40.109751	-104.862678	1,283,466.91	3,178,259.17
10,923.00	89.69	180.27	7,587.81	-3,527.89	-555.03	40.109501	-104.862678	1,283,375.92	3,178,260.04
11,015.00	89.82	179.64	7,588.21	-3,619.88	-554.95	40.109248	-104.862677	1,283,283.93	3,178,260.77
11,107.00	89.91	179.53	7,588.42	-3,711.88	-554.29	40.108996	-104.862675	1,283,191.94	3,178,262.10
11,199.00	89.11	178.63	7,589.21	-3,803.86	-552.81	40.108743	-104.862670	1,283,099.98	3,178,264.24
11,292.00	89.20	179.91	7,590.58	-3,896.85	-551.62	40.108488	-104.862665	1,283,007.01	3,178,266.10
11,383.00	89.97	180.67	7,591.24	-3,987.84	-552.09	40.108238	-104.862667	1,282,916.02	3,178,266.29
11,476.00	89.91	180.13	7,591.34	-4,080.84	-552.73	40.107983	-104.862669	1,282,823.02	3,178,266.31
11,569.00	90.89	180.83	7,590.69	-4,173.83	-553.51	40.107728	-104.862672	1,282,730.03	3,178,266.20
11,661.00	90.74	181.76	7,589.38	-4,265.80	-555.59	40.107475	-104.862679	1,282,638.06	3,178,264.79
11,754.00	89.32	180.29	7,589.33	-4,358.78	-557.26	40.107220	-104.862685	1,282,545.07	3,178,263.80
11,846.00	89.20	179.43	7,590.52	-4,450.77	-557.03	40.106967	-104.862685	1,282,453.09	3,178,264.68
11,938.00	90.77	180.84	7,590.54	-4,542.76	-557.25	40.106715	-104.862685	1,282,361.10	3,178,265.13
12,030.00	91.45	182.27	7,588.76	-4,634.71	-559.74	40.106463	-104.862694	1,282,269.14	3,178,263.30
12,122.00	89.69	182.35	7,587.84	-4,726.63	-563.45	40.106210	-104.862708	1,282,177.20	3,178,260.25
12,215.00	89.60	181.61	7,588.42	-4,819.57	-566.67	40.105955	-104.862719	1,282,084.24	3,178,257.71
12,306.00	89.97	181.18	7,588.76	-4,910.54	-568.88	40.105705	-104.862727	1,281,993.26	3,178,256.15
12,397.00	90.34	180.83	7,588.52	-5,001.52	-570.48	40.105456	-104.862733	1,281,902.27	3,178,255.21
12,489.00	91.32	181.01	7,587.18	-5,093.50	-571.95	40.105203	-104.862738	1,281,810.29	3,178,254.40
12,581.00	89.48	180.77	7,586.54	-5,185.48	-573.38	40.104951	-104.862743	1,281,718.30	3,178,253.63
12,673.00	89.57	180.12	7,587.30	-5,277.48	-574.10	40.104698	-104.862746	1,281,626.31	3,178,253.58
12,764.00	89.78	181.51	7,587.82	-5,368.47	-575.39	40.104448	-104.862750	1,281,535.32	3,178,252.94
12,856.00	89.54	180.92	7,588.37	-5,460.44	-577.34	40.104196	-104.862757	1,281,443.33	3,178,251.65
12,947.00	89.69	181.03	7,588.98	-5,551.43	-578.89	40.103946	-104.862763	1,281,352.34	3,178,250.76
13,040.00	89.69	180.82	7,589.48	-5,644.41	-580.39	40.103691	-104.862768	1,281,259.35	3,178,249.93
13,134.00	89.75	179.89	7,589.94	-5,738.41	-580.97	40.103433	-104.862770	1,281,165.36	3,178,250.02
13,228.00	91.02	180.94	7,589.31	-5,832.40	-581.65	40.103175	-104.862773	1,281,071.37	3,178,250.02
13,322.00	89.82	180.99	7,588.62	-5,926.38	-583.24	40.102917	-104.862778	1,280,977.38	3,178,249.12
13,417.00	89.08	180.72	7,589.53	-6,021.37	-584.66	40.102656	-104.862783	1,280,882.39	3,178,248.38
13,510.00	89.45	180.32	7,590.72	-6,114.36	-585.50	40.102401	-104.862786	1,280,789.40	3,178,248.21
13,604.00	89.94	180.57	7,591.23	-6,208.35	-586.23	40.102143	-104.862789	1,280,695.41	3,178,248.16
13,699.00	89.11	182.06	7,592.01	-6,303.32	-588.41	40.101882	-104.862797	1,280,600.43	3,178,246.66
13,793.00	88.40	182.25	7,594.06	-6,397.23	-591.94	40.101624	-104.862809	1,280,506.50	3,178,243.81
13,887.00	87.29	181.19	7,597.59	-6,491.12	-594.76	40.101367	-104.862819	1,280,412.60	3,178,241.66
13,981.00	88.92	181.52	7,600.70	-6,585.04	-596.98	40.101109	-104.862827	1,280,318.67	3,178,240.12
14,076.00	89.17	181.01	7,602.28	-6,680.00	-599.08	40.100848	-104.862835	1,280,223.70	3,178,238.71
14,170.00	90.43	181.13	7,602.61	-6,773.98	-600.84	40.100590	-104.862841	1,280,129.71	3,178,237.63
14,265.00	90.83	180.85	7,601.57	-6,868.96	-602.48	40.100329	-104.862847	1,280,034.73	3,178,236.67
14,359.00	90.68	181.69	7,600.33	-6,962.93	-604.56	40.100071	-104.862854	1,279,940.75	3,178,235.27
14,454.00	90.34	182.31	7,599.48	-7,057.87	-607.88	40.099811	-104.862866	1,279,845.79	3,178,232.64
14,549.00	90.34	182.09	7,598.92	-7,152.80	-611.52	40.099550	-104.862879	1,279,750.84	3,178,229.67

## Design Report for Small Eyed 35C-35HZ - Actual Surveys

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Geographic Coordinates		UTM Coordinates	
				+N/-S (usft)	+E/-W (usft)	Latitude (usft)	Longitude (usft)	Northing (usft)	Easting (usft)
14,643.00	90.31	181.12	7,598.38	-7,246.76	-614.16	40.099292	-104.862889	1,279,656.87	3,178,227.72
14,738.00	89.32	181.09	7,598.69	-7,341.74	-615.99	40.099032	-104.862895	1,279,561.88	3,178,226.57
14,832.00	89.38	180.05	7,599.76	-7,435.73	-616.92	40.098774	-104.862898	1,279,467.90	3,178,226.31
14,926.00	88.18	178.96	7,601.76	-7,529.70	-616.11	40.098516	-104.862896	1,279,373.94	3,178,227.80
15,020.00	88.28	178.68	7,604.66	-7,623.63	-614.18	40.098258	-104.862889	1,279,280.02	3,178,230.42
15,114.00	89.20	178.15	7,606.73	-7,717.57	-611.58	40.098000	-104.862879	1,279,186.11	3,178,233.69
15,208.00	90.18	177.88	7,607.24	-7,811.51	-608.32	40.097742	-104.862868	1,279,092.19	3,178,237.63
15,302.00	91.48	177.40	7,605.88	-7,905.42	-604.45	40.097484	-104.862854	1,278,998.32	3,178,242.17
15,397.00	91.45	178.25	7,603.45	-8,000.32	-600.85	40.097224	-104.862841	1,278,903.45	3,178,246.46
15,491.00	88.06	178.27	7,603.85	-8,094.26	-597.99	40.096966	-104.862831	1,278,809.54	3,178,249.99
15,586.00	89.35	178.68	7,606.00	-8,189.20	-595.47	40.096705	-104.862822	1,278,714.62	3,178,253.20
15,680.00	91.05	179.52	7,605.67	-8,283.19	-593.99	40.096447	-104.862816	1,278,620.66	3,178,255.36
15,775.00	90.86	180.50	7,604.08	-8,378.17	-594.01	40.096187	-104.862816	1,278,525.68	3,178,256.02
15,869.00	90.09	179.81	7,603.30	-8,472.17	-594.26	40.095929	-104.862817	1,278,431.69	3,178,256.45
15,963.00	88.98	179.25	7,604.07	-8,566.16	-593.49	40.095671	-104.862815	1,278,337.71	3,178,257.90
16,057.00	90.34	180.84	7,604.63	-8,660.15	-593.56	40.095413	-104.862815	1,278,243.72	3,178,258.50
16,151.00	91.36	181.73	7,603.23	-8,754.12	-595.67	40.095155	-104.862822	1,278,149.75	3,178,257.07
16,245.00	91.29	182.89	7,601.06	-8,848.01	-599.46	40.094897	-104.862836	1,278,055.83	3,178,253.96
16,339.00	90.52	181.86	7,599.57	-8,941.92	-603.35	40.094639	-104.862850	1,277,961.90	3,178,250.74
16,433.00	91.05	182.81	7,598.28	-9,035.83	-607.18	40.094381	-104.862863	1,277,867.97	3,178,247.59
16,528.00	89.85	183.23	7,597.54	-9,130.69	-612.19	40.094121	-104.862881	1,277,773.07	3,178,243.27
16,623.00	89.85	184.25	7,597.79	-9,225.49	-618.38	40.093861	-104.862904	1,277,678.24	3,178,237.76
16,717.00	90.18	184.52	7,597.76	-9,319.21	-625.57	40.093603	-104.862929	1,277,584.47	3,178,231.25
16,812.00	89.41	185.14	7,598.10	-9,413.88	-633.57	40.093344	-104.862958	1,277,489.76	3,178,223.93
16,907.00	87.63	184.50	7,600.56	-9,508.50	-641.55	40.093084	-104.862986	1,277,395.08	3,178,216.63
17,002.00	90.18	184.21	7,602.37	-9,603.20	-648.76	40.092824	-104.863012	1,277,300.33	3,178,210.10
17,097.00	91.29	183.89	7,601.15	-9,697.96	-655.47	40.092564	-104.863036	1,277,205.54	3,178,204.08
17,192.00	90.62	182.90	7,599.57	-9,792.78	-661.09	40.092303	-104.863056	1,277,110.68	3,178,199.14
17,287.00	91.54	182.27	7,597.78	-9,887.66	-665.38	40.092043	-104.863071	1,277,015.77	3,178,195.54
17,382.00	92.12	181.73	7,594.75	-9,982.55	-668.69	40.091782	-104.863083	1,276,920.86	3,178,192.91
17,476.00	91.82	181.54	7,591.51	-10,076.46	-671.37	40.091525	-104.863093	1,276,826.94	3,178,190.91
17,571.00	91.27	180.33	7,588.95	-10,171.41	-672.92	40.091264	-104.863098	1,276,731.99	3,178,190.04
17,667.00	87.25	180.03	7,590.19	-10,267.38	-673.22	40.091001	-104.863099	1,276,636.02	3,178,190.43
17,761.00	88.55	180.75	7,593.64	-10,361.31	-673.86	40.090743	-104.863102	1,276,542.09	3,178,190.47
17,856.00	88.83	181.00	7,595.81	-10,456.28	-675.31	40.090482	-104.863107	1,276,447.12	3,178,189.70
17,976.00	88.43	180.43	7,598.68	-10,576.23	-676.81	40.090153	-104.863112	1,276,327.16	3,178,189.07
18,020.00	88.43	180.43	7,599.88	-10,620.22	-677.14	40.090032	-104.863113	1,276,283.18	3,178,189.06



## Design Report for Small Eyed 35C-35HZ - Actual Surveys

### Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,245.00	1,244.98	3.43	0.14	Tie-On to Surface Gyros @ 1245.00ft
1,390.00	1,389.98	3.69	-0.79	First MWD Survey @ 1390.00ft
17,976.00	7,598.68	-10,576.23	-676.81	Final MWD Survey @ 17976.00ft
18,020.00	7,599.88	-10,620.22	-677.14	Str Line Proj to Bit @ 18020' MD :: 7599.88' TVD

### Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (usft)
				+N/_S (usft)	+E/-W (usft)	
User	No Target (Freehand)	180.88	Slot	0.00	0.00	0.00

### Survey tool program

From (usft)	To (usft)	Survey/Plan	Survey Tool
25.00	1,245.00	MS Energy Gyros	NS-GYRO-MS
1,390.00	8,208.00	MWD Vertical/Build Surveys	MWD+IFR1+SC
8,302.00	17,976.00	MWD Lateral Surveys	MWD+IFR1+SC

### Casing Details

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
1,330.40	1,330.38	9 5/8" Casing Set @ 1330.4' MD :: 1330.38' TVD	9-5/8	13-1/2
7,940.80	7,579.42	7" Casing Set @ 7940.8' MD :: 7579.42' TVD	7	8-3/4



---

Design Report for Small Eyed 35C-35HZ - Actual Surveys

---

***Design Targets***

Shape	Target Name	TVD ( )	Northing ( )	Easting ( )	+N/-S	+E/-W	Created	Updated
-------	-------------	------------	-----------------	----------------	-------	-------	---------	---------

**Directional Difficulty Index**

Average Dogleg over Survey:	1.41 °/100usft	Maximum Dogleg over Survey:	16.12 °/100usft at 7,458.00 usft
Net Tortosity applicable to Plans:	0.62 °/100usft	Directional Difficulty Index:	6.827

**Audit Info**

**North Reference Sheet for Sec. 23-T2N-R67W - Small Eyed 35C-35HZ - Plan C**

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to True North Reference.

Vertical Depths are relative to RKB = 25' @ 4988.00usft (H&P 308). Northing and Easting are relative to Small Eyed 35C-35HZ

Coordinate System is US State Plane 1983, Colorado Northern Zone using datum North American Datum 1983, ellipsoid GRS 1980

Projection method is Lambert Conformal Conic (2 parallel)

Central Meridian is -105.500000°, Longitude Origin:0.000000°, Latitude Origin:40.783333°

False Easting: 3,000,000.00usft, False Northing: 1,000,000.00usft, Scale Reduction: 0.99995947

Grid Coordinates of Well: 1,286,907.57 usft N, 3,178,789.59 usft E

Geographical Coordinates of Well: 40° 07' 09.07" N, 104° 51' 38.49" W

Grid Convergence at Surface is: 0.41°

Based upon Minimum Curvature type calculations, at a Measured Depth of 18,020.00usft

the Bottom Hole Displacement is 10,641.78usft in the Direction of 183.65° (True).

Magnetic Convergence at surface is: -8.14° (31 July 2014, , BGGM2014)

