

NOBLE ENERGY INC.
 WILHITE 30-31
 NESW 30-7N-64W
 2170 FSL & 1807 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 12/17/2014

API: 05-123-24806
 COGCC #

GL Elev: 4861'
 KB Elev: 4873'


Spud Date: 10/13/2007

Surface Casing :
 8 5/8" 24# @ 687'
 Cement: 350
 TOC: Surface

TOC @ 6328'

Nio Top: 6831'

Production Casing :
 4 1/2" 11.6# @ 7279'
 Cement: 135
 TD: 10/17/2007

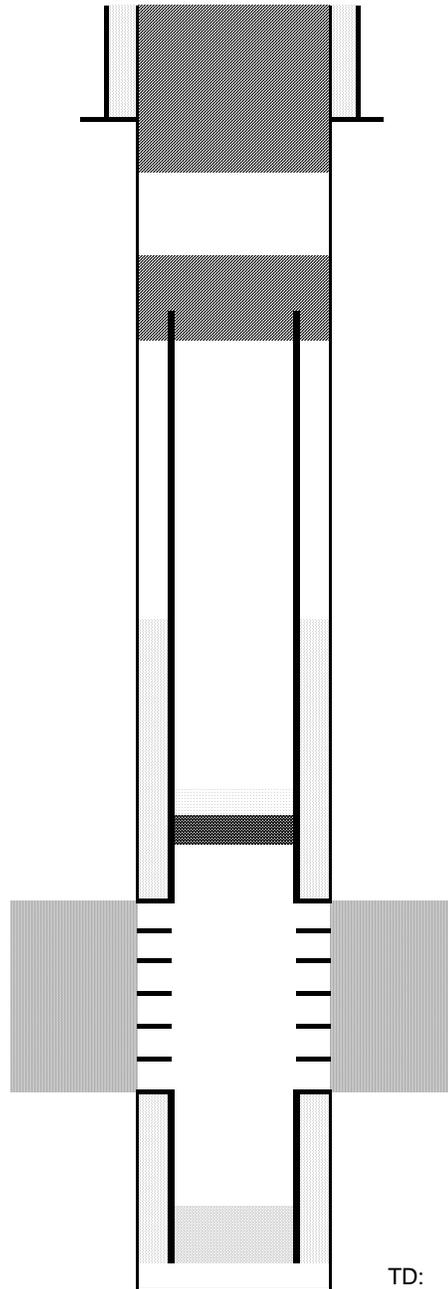

Cut surface casing off 6'-8' below surface.

Pump approx 290 sx shoe plug @ 755'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 7101' w/ 2 sx cement on top

Codell Perforations 7151' - 7164'

TD: 7317'